



# Industrial Current/Voltage Output Driver with Programmable Ranges

Data Sheet

AD5748

## FEATURES

**Current output ranges: 4 mA to 21 mA, 0 mA to 21 mA**

**$\pm 0.15\%$  FSR total unadjusted error (TUE)**

**$\pm 5$  ppm/ $^{\circ}\text{C}$  FSR typical output drift**

**Voltage output ranges: 0 V to 5 V, 0 V to 10.5 V,  $\pm 10.5$  V**

**$\pm 0.05\%$  FSR total unadjusted error (TUE)**

**$\pm 3$  ppm/ $^{\circ}\text{C}$  FSR output drift**

**Flexible serial digital interface**

**On-chip output fault detection**

**PEC error checking**

**Asynchronous CLEAR function**

**Flexible power-up condition to 0 V or tristate**

**Power supply range**

**$\text{AV}_{\text{DD}}$ : +12 V ( $\pm 10\%$ ) to +24 V ( $\pm 10\%$ )**

**$\text{AV}_{\text{SS}}$ : -12 V ( $\pm 10\%$ ) to -24 V ( $\pm 10\%$ )**

**Output loop compliance to  $\text{AV}_{\text{DD}} - 2.75$  V**

**Temperature range:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$**

**32-lead, 5 mm  $\times$  5 mm LFCSP package**

## APPLICATIONS

**Process control**

**Actuator control**

**PLCs**

## GENERAL DESCRIPTION

The AD5748 is a single-channel, low cost, precision, voltage/current output driver with hardware or software programmable output ranges. The software ranges are configured via an SPI-/MICROWIRE<sup>™</sup>-compatible serial interface. The AD5748 targets applications in PLC and industrial process control. The analog input to the AD5748 is provided from a low voltage, single-supply, digital-to-analog converter (DAC) and is internally conditioned to provide the desired output current/voltage range. The analog input range is 0 V to 4.096 V.

The output current range is programmable across two current ranges: 4 mA to 21 mA and 0 mA to 21 mA.

Voltage output is provided from a separate pin that can be configured to provide 0 V to 5 V, 0 V to 10.5 V, or  $\pm 10.5$  V output range.

Analog outputs are short-circuit and open-circuit protected and can drive capacitive loads of 2  $\mu\text{F}$  and inductive loads of 0.1 H.

The device is specified to operate with a power supply range from  $\pm 12$  V to  $\pm 24$  V. Output loop compliance is 0 V to  $\text{AV}_{\text{DD}} - 2.75$  V.

The flexible serial interface is SPI- and MICROWIRE-compatible and can be operated in 3-wire mode to minimize the digital isolation required in isolated applications. The interface also features an optional PEC error checking feature using CRC-8 error checking, useful in industrial environments where data communication corruption can occur.

The device also includes a power-on-reset function, ensuring that the device powers up in a known state (0 V or tristate), and an asynchronous CLEAR pin that sets the outputs to zero scale/midscale voltage output or the low end of the selected current range.

An HW SELECT pin is used to configure the part for hardware or software mode on power-up.

Note that the plots in the Typical Performance Characteristics section of this data sheet contain information on the standard ranges, as released in the AD5750/AD5750-1 data sheet. Although the overranges have been tested, new plots were not generated and substitution data was used for plotting purposes.

Table 1. Related Device

| Part Number | Description  |
|-------------|--|
| AD5422      | Single-channel, 16-bit, serial input current source and voltage output DAC |

Rev. B

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781.329.4700 ©2010–2014 Analog Devices, Inc. All rights reserved.  
[Technical Support](#) [www.analog.com](http://www.analog.com)

## TABLE OF CONTENTS

|   |    |   |    |
|---|----|---|----|
| Features .....                                    | 1  | Reset Function .....                          | 25 |
| Applications .....                                | 1  | OUTEN .....                                   | 25 |
| General Description .....                         | 1  | Software Control .....                        | 25 |
| Revision History .....                            | 2  | Hardware Control .....                        | 27 |
| Functional Block Diagram .....                    | 3  | Transfer Function .....                       | 27 |
| Specifications .....                              | 4  | Detailed Description of Features .....        | 28 |
| Timing Characteristics .....                      | 7  | Output Fault Alert—Software Mode .....        | 28 |
| Absolute Maximum Ratings .....                    | 9  | Output Fault Alert—Hardware Mode .....        | 28 |
| ESD Caution .....                                 | 9  | Voltage Output Short-Circuit Protection ..... | 28 |
| Pin Configuration and Function Descriptions ..... | 10 | Asynchronous Clear (CLEAR) .....              | 28 |
| Typical Performance Characteristics .....         | 12 | Current Setting Resistor .....                | 29 |
| Voltage Output .....                              | 12 | Packet Error Checking .....                   | 29 |
| Current Output .....                              | 16 | Applications Information .....                | 30 |
| Terminology .....                                 | 21 | Transient Voltage Protection .....            | 30 |
| Theory of Operation .....                         | 22 | Thermal Considerations .....                  | 30 |
| Software Mode .....                               | 22 | Layout Guidelines .....                       | 30 |
| Current Output Architecture .....                 | 24 | Galvanically Isolated Interface .....         | 31 |
| Driving Inductive Loads .....                     | 24 | Microprocessor Interfacing .....              | 31 |
| Power-On State of the AD5748 .....                | 24 | Outline Dimensions .....                      | 32 |
| Default Registers at Power-On .....               | 25 | Ordering Guide .....                          | 32 |

## REVISION HISTORY

### 9/14—Rev. A to Rev. B


|   |    |
|---|----|
| Change to Table 4 .....                             | 9  |
| Change to Figure 4 .....                            | 10 |
| Changes to Figure 44 .....                          | 19 |
| Changes to Asynchronous Clear (CLEAR) Section ..... | 28 |
| Changes to Thermal Considerations Section .....     | 30 |
| Updated Outline Dimensions .....                    | 32 |
| Changes to Ordering Guide .....                     | 32 |

### 5/10—Rev. 0 to Rev. A

|  |   |
|--|---|
| Changes to Table 2, Power Requirements ..... | 6 |
|--|---|

### 3/10—Revision 0: Initial Version

## FUNCTIONAL BLOCK DIAGRAM

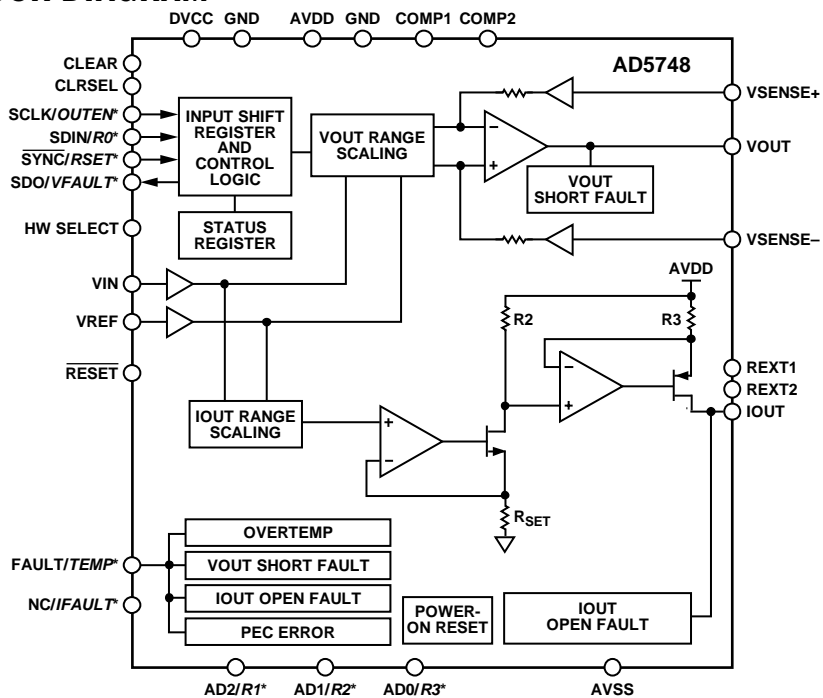

\*DENOTES SHARED PIN. SOFTWARE MODE DENOTED BY REGULAR TEXT, HARDWARE MODE DENOTED BY *ITALIC* TEXT. FOR EXAMPLE, FOR FAULT/TEMP PIN, IN SOFTWARE MODE, THIS PIN TAKES ON FAULT FUNCTION. IN HARDWARE MODE, THIS PIN TAKES ON TEMP FUNCTION.

08922-001

Figure 1.

## SPECIFICATIONS

$AV_{DD}/AV_{SS} = \pm 12\text{ V } (\pm 10\%) \text{ to } \pm 24\text{ V } (\pm 10\%)$ ,  $DV_{CC} = 2.7\text{ V to } 5.5\text{ V}$ ,  $GND = 0\text{ V}$ .  $I_{OUT}$ :  $R_{LOAD} = 300\ \Omega$ . All specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.

Table 2.

| Parameter <sup>1</sup>                                | Min   | Typ         | Max   | Unit                      | Test Conditions/Comments  |
|---|-------|-------------|-------|---------------------------|---|
| INPUT VOLTAGE RANGE                                   |       |             |       |                           | Output unloaded   |
| $V_{IN}$  |       | 0 to 4.096  |       | V                         |   |
| Input Leakage Current                                 | −1    |             | +1    | $\mu\text{A}$             |   |
| REFERENCE INPUT                                       |       |             |       |                           |   |
| Reference Input Voltage                               |       | 4.096       |       | V                         | External reference needs to be exactly as stated; otherwise, accuracy errors show up as error in output |
| Input Leakage Current                                 | −1    |             | +1    | $\mu\text{A}$             |   |
| VOLTAGE OUTPUT, $V_{OUT}$                             |       |             |       |                           |   |
| Output Voltage Ranges                                 | 0     |             | 5     | V                         | AVDD must have minimum 1.3 V headroom   |
|   | 0     |             | 10.5  | V                         |   |
|   | −10.5 |             | +10.5 | V                         | AVDD/AVSS must have minimum 1.3 V headroom  |
| Accuracy  |       |             |       |                           |   |
| Total Unadjusted Error (TUE) <sup>2</sup>             | −0.3  |             | +0.3  | % FSR                     | $T_A = 25^\circ\text{C}$  |
|   | −0.1  | $\pm 0.05$  | +0.1  | % FSR                     |   |
| Relative Accuracy (INL)                               | −0.02 | $\pm 0.005$ | +0.02 | % FSR                     |   |
| Bipolar Zero Error (Offset at Midscale)               | −10   |             | +10   | mV                        | $\pm 10.5\text{ V range}$   |
|   | −8    | $\pm 0.5$   | +8    | mV                        | $T_A = 25^\circ\text{C}, \pm 10.5\text{ V range}$   |
| Bipolar Zero Error $TC^3$                             |       | $\pm 1.5$   |       | ppm FSR/ $^\circ\text{C}$ | $\pm 10.5\text{ V range}$   |
| Zero-Scale Error                                      | −10   |             | +10   | mV                        | $\pm 10.5\text{ V range}$   |
|   | −8    | $\pm 0.5$   | +8    | mV                        | $T_A = 25^\circ\text{C}, \pm 10.5\text{ V range}$   |
| Zero-Scale Error $TC^3$                               |       | $\pm 1$     |       | ppm FSR/ $^\circ\text{C}$ | $\pm 10.5\text{ V range}$   |
| Zero-Scale/Offset Error                               | −5    |             | +5    | mV                        | 0 V to 10.5 V range   |
|   | −4    | $\pm 0.5$   | +4    | mV                        | $T_A = 25^\circ\text{C}, 0\text{ V to } 10.5\text{ V range}$  |
|   | −3    |             | +3    | mV                        | 0 V to 5 V range  |
|   | −2.2  | $\pm 0.3$   | +2.2  | mV                        | $T_A = 25^\circ\text{C}, 0\text{ V to } 5\text{ V range}$   |
| Offset Error $TC^3$                                   |       | $\pm 2$     |       | ppm FSR/ $^\circ\text{C}$ |   |
| Gain Error  | −0.05 |             | +0.05 | % FSR                     | All ranges  |
|   | −0.04 | $\pm 0.015$ | +0.04 | % FSR                     | $T_A = 25^\circ\text{C}$  |
| Gain Error $TC^3$                                     |       | $\pm 0.5$   |       | ppm FSR/ $^\circ\text{C}$ |   |
| Full-Scale Error                                      | −0.05 |             | +0.05 | % FSR                     | All ranges  |
|   | −0.04 | $\pm 0.015$ | +0.04 | % FSR                     | $T_A = 25^\circ\text{C}$  |
| Full-Scale Error $TC^3$                               |       | $\pm 1.5$   |       | ppm FSR/ $^\circ\text{C}$ |   |
| VOLTAGE OUTPUT CHARACTERISTICS <sup>3</sup>           |       |             |       |                           |   |
| Headroom  |       |             | 1.3   | V                         | Output unloaded   |
| Short-Circuit Current                                 |       | 15          |       | mA                        |   |
| Load  | 1     |             |       | k $\Omega$                |   |
| Capacitive Load Stability                             |       |             |       |                           | $T_A = 25^\circ\text{C}$  |
| $R_{LOAD} = \infty$                                   |       |             | 1     | nF                        |   |
| $R_{LOAD} = 2\text{ k}\Omega$                         |       |             | 1     | nF                        |   |
| $R_{LOAD} = \infty$                                   |       |             | 2     | $\mu\text{F}$             | External compensation capacitor required; see the Driving Inductive Loads section                       |
| DC Output Impedance                                   |       | 0.12        |       | $\Omega$                  |   |
| 0 V to 5 V range, $\frac{1}{4}$ to $\frac{3}{4}$ Step |       | 7           |       | $\mu\text{s}$             | Specified with $2\text{ k}\Omega \parallel 220\text{ pF}$ , $\pm 0.05\%$                                |
| 0 V to 5 V range, 40 mV Input Step                    |       | 4.5         |       | $\mu\text{s}$             | Specified with $2\text{ k}\Omega \parallel 220\text{ pF}$ , $\pm 0.05\%$                                |
| Slew Rate   |       | 2           |       | V/ $\mu\text{s}$          | Specified with $2\text{ k}\Omega \parallel 220\text{ pF}$   |
| Output Noise  |       | 2.5         |       | $\mu\text{V rms}$         | 0.1 Hz to 10 Hz bandwidth   |
|   |       | 45.5        |       | $\mu\text{V rms}$         | 100 kHz bandwidth   |

| Parameter <sup>1</sup>                      | Min    | Typ          | Max              | Unit       | Test Conditions/Comments   |
|---|--------|--------------|------------------|------------|--|
| Output Noise Spectral Density               |        | 165          |                  | nV/√Hz     | Measured at 10 kHz; specified with 2 kΩ    220 pF  |
| AC PSRR                                     |        | −65          |                  | dB         | 200 mV, 50 Hz/60 Hz sine wave superimposed on power supply voltage                               |
| DC PSRR                                     |        | 10           |                  | μV/V       | Outputs unloaded   |
| CURRENT OUTPUT, $I_{OUT}$                   |        |              |                  |            |  |
| Output Current Ranges                       | 0      |              | 21               | mA         |  |
|   | 4      |              | 21               | mA         |  |
| Accuracy, Internal $R_{SET}$ <sup>4</sup>   |        |              |                  |            |  |
| Total Unadjusted Error (TUE) <sup>2</sup>   | −0.5   |              | +0.5             | % FSR      | $T_A = 25^\circ\text{C}$   |
|   | −0.3   | ±0.15        | +0.3             | % FSR      | 4 mA to 21 mA, 0 mA to 21 mA   |
| Relative Accuracy (INL)                     | −0.02  | ±0.01        | +0.02            | % FSR      | 4 mA to 21 mA, 0 mA to 21 mA   |
| Offset Error                                | −16    |              | +16              | μA         | 4 mA to 21 mA, 0 mA to 21 mA   |
|   | −10    | +5           | +10              | μA         | $T_A = 25^\circ\text{C}$   |
| Offset Error TC <sup>3</sup>                |        | ±3           |                  | ppm FSR/°C | 4 mA to 21 mA, 0 mA to 21 mA   |
| Gain Error                                  | −0.2   |              | +0.2             | % FSR      | 4 mA to 21 mA, 0 mA to 21 mA   |
|   | −0.03  | ±0.006       | +0.03            | % FSR      | $T_A = 25^\circ\text{C}$   |
| Gain TC <sup>3</sup>                        |        | ±8           |                  | ppm FSR/°C | 4 mA to 21 mA, 0 mA to 21 mA   |
| Full-Scale Error                            | −0.2   |              | +0.2             | % FSR      | 4 mA to 21 mA, 0 mA to 21 mA   |
|   | −0.125 | ±0.02        | +0.125           | % FSR      | $T_A = 25^\circ\text{C}$   |
| Full-Scale TC <sup>3</sup>                  |        | ±4           |                  | ppm FSR/°C | 4 mA to 21 mA, 0 mA to 21 mA   |
| Accuracy, External $R_{SET}$ <sup>4</sup>   |        |              |                  |            |  |
| Total Unadjusted Error (TUE) <sup>2</sup>   | −0.3   |              | +0.3             | % FSR      | $T_A = 25^\circ\text{C}$   |
|   | −0.1   | ±0.02        | +0.1             | % FSR      | 4 mA to 21 mA, 0 mA to 21 mA   |
| Relative Accuracy (INL)                     | −0.02  | ±0.01        | +0.02            | % FSR      | 4 mA to 21 mA, 0 mA to 21 mA   |
| Offset Error                                | −14    |              | +14              | μA         | 4 mA to 21 mA, 0 mA to 21 mA   |
|   | −11    | +5           | +11              | μA         | $T_A = 25^\circ\text{C}$   |
| Offset Error TC <sup>3</sup>                |        | ±2           |                  | ppm FSR/°C | 4 mA to 21 mA, 0 mA to 21 mA   |
| Gain Error                                  | −0.08  |              | +0.08            | % FSR      | 4 mA to 21 mA, 0 mA to 21 mA   |
|   | −0.07  | ±0.02        | +0.07            | % FSR      | $T_A = 25^\circ\text{C}$   |
| Gain TC                                     |        | ±1           |                  | ppm FSR/°C | 4 mA to 21 mA, 0 mA to 21 mA   |
| Full-Scale Error                            | −0.1   |              | +0.1             | % FSR      | 4 mA to 21 mA, 0 mA to 21 mA   |
|   | −0.07  | ±0.02        | +0.07            | % FSR      | $T_A = 25^\circ\text{C}$   |
| Full-Scale TC <sup>3</sup>                  |        | ±2           |                  | ppm FSR/°C | 4 mA to 21 mA, 0 mA to 21 mA   |
| CURRENT OUTPUT CHARACTERISTICS <sup>3</sup> |        |              |                  |            |  |
| Current Loop Compliance Voltage             | 0      |              | $AV_{DD} - 2.75$ | V          |  |
| Resistive Load                              |        | See comments |                  |            | Chosen so that compliance is not exceeded  |
| Inductive Load                              |        | See comments |                  |            | Needs appropriate capacitor at higher inductance values; see the Driving Inductive Loads section |
| Settling Time                               |        |              |                  |            |  |
| 4 mA to 21 mA, Full-Scale Step              |        | 8.5          |                  | μs         | 250 Ω load   |
| 120 μA Step, 4 mA to 21 mA Range            |        | 1.2          |                  | μs         | 250 Ω load   |
| DC PSRR                                     |        |              | 1                | μA/V       |  |
| Output Impedance                            |        | 130          |                  | MΩ         |  |
| DIGITAL INPUT                               |        |              |                  |            |  |
| Input High Voltage, $V_{IH}$                | 2      |              |                  | V          | JEDEC compliant  |
| Input Low Voltage, $V_{IL}$                 |        |              | 0.8              | V          |  |
| Input Current                               | −1     |              | +1               | μA         | Per pin  |
| Pin Capacitance                             |        | 5            |                  | pF         | Per pin  |
| DIGITAL OUTPUTS <sup>3</sup>                |        |              |                  |            |  |
| FAULT, IFAULT, TEMP, VFAULT                 |        |              |                  |            |  |
| Output Low Voltage, $V_{OL}$                |        |              | 0.4              | V          | 10 kΩ pull-up resistor to DVCC   |
| Output Low Voltage, $V_{OL}$                |        | 0.6          |                  | V          | At 2.5 mA  |
| Output High Voltage, $V_{OH}$               | 3.6    |              |                  | V          | 10 kΩ pull-up resistor to DVCC   |

| Parameter <sup>1</sup>            | Min        | Typ        | Max | Unit    | Test Conditions/Comments                                      |
|-----------------------------------|------------|------------|-----|---------|---|
| SDO                               |            |            |     |         |   |
| Output Low Voltage, $V_{OL}$      | 0.5        | 0.5        |     | V       | Sinking 200 $\mu$ A   |
| Output High Voltage, $V_{OH}$     | DVCC – 0.5 | DVCC – 0.5 |     | V       | Sourcing 200 $\mu$ A  |
| High Impedance Output Capacitance |            | 3          |     | pF      |   |
| High Impedance Leakage Current    | –1         |            | +1  | $\mu$ A |   |
| POWER REQUIREMENTS                |            |            |     |         |   |
| Positive Analog Supply, $AV_{DD}$ | 12         |            | 24  | V       | $\pm 10\%$  |
| Negative Analog Supply, $AV_{SS}$ | –12        |            | –24 | V       | $\pm 10\%$  |
| Digital Power Supply, $DV_{CC}$   |            |            |     |         |   |
| Input Voltage                     | 2.7        |            | 5.5 | V       |   |
| $AI_{DD}$                         |            | 4.4        | 5.6 | mA      | Output unloaded, output disabled, R3, R2, R1, R0 = 0, 1, 0, 1 |
|                                   |            | 5.2        | 6.2 | mA      | Current output enabled  |
|                                   |            | 5.2        | 6.2 | mA      | Voltage output enabled  |
| $AI_{SS}$                         |            | 2.0        | 2.5 | mA      | Output unloaded, output disabled, R3, R2, R1, R0 = 0, 1, 0, 1 |
|                                   |            | 2.5        | 3   | mA      | Current output enabled  |
|                                   |            | 2.5        | 3   | mA      | Voltage output enabled  |
| $DI_{CC}$                         |            | 0.3        | 1   | mA      | $V_{IH} = DV_{CC}$ , $V_{IL} = GND$                           |
| Power Dissipation                 |            | 108        |     | mW      | $AV_{DD}/AV_{SS} = \pm 24$ V, outputs unloaded                |

<sup>1</sup> Temperature range: –40°C to +105°C; typical at +25°C.

<sup>2</sup> Specification includes gain and offset errors over temperature, and drift after 1000 hours,  $T_A = 125^\circ\text{C}$ .

<sup>3</sup> Guaranteed by characterization, but not production tested.

<sup>4</sup> See the Current Setting Resistor section.

**TIMING CHARACTERISTICS**

$AV_{DD}/AV_{SS} = \pm 12\text{ V } (\pm 10\%) \text{ to } \pm 24\text{ V } (\pm 10\%)$ ,  $DV_{CC} = 2.7\text{ V to } 5.5\text{ V}$ ,  $GND = 0\text{ V}$ .  $V_{OUT}$ :  $R_{LOAD} = 2\text{ k}\Omega$ ,  $C_L = 200\text{ pF}$ ,  $I_{OUT}$ :  $R_{LOAD} = 300\text{ }\Omega$ . All specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.

**Table 3.**

| Parameter <sup>1, 2</sup> | Limit at $T_{MIN}$ , $T_{MAX}$ | Unit              | Description  |
|---------------------------|--------------------------------|-------------------|--|
| $t_1$                     | 20                             | ns min            | SCLK cycle time  |
| $t_2$                     | 8                              | ns min            | SCLK high time   |
| $t_3$                     | 8                              | ns min            | SCLK low time  |
| $t_4$                     | 5                              | ns min            | $\overline{SYNC}$ falling edge to SCLK falling edge setup time   |
| $t_5$                     | 10                             | ns min            | 16 <sup>th</sup> SCLK falling edge to $\overline{SYNC}$ rising edge (on 24 <sup>th</sup> SCLK falling edge if using PEC) |
| $t_6$                     | 5                              | ns min            | Minimum $\overline{SYNC}$ high time (write mode)   |
| $t_7$                     | 5                              | ns min            | Data setup time  |
| $t_8$                     | 5                              | ns min            | Data hold time   |
| $t_9, t_{10}$             | 1.5                            | $\mu\text{s max}$ | CLEAR pulse low/high activation time   |
| $t_{11}$                  | 5                              | ns min            | Minimum $\overline{SYNC}$ high time (read mode)  |
| $t_{12}$                  | 40                             | ns max            | SCLK rising edge to SDO valid ( $SDO\ C_L = 15\text{ pF}$ )  |
| $t_{13}$                  | 10                             | ns min            | $\overline{RESET}$ pulse low time  |

<sup>1</sup> Guaranteed by characterization, but not production tested.

<sup>2</sup> All input signals are specified with  $t_R = t_F = 5\text{ ns}$  (10% to 90% of  $DV_{CC}$ ) and timed from a voltage level of 1.2 V.

Timing Diagrams

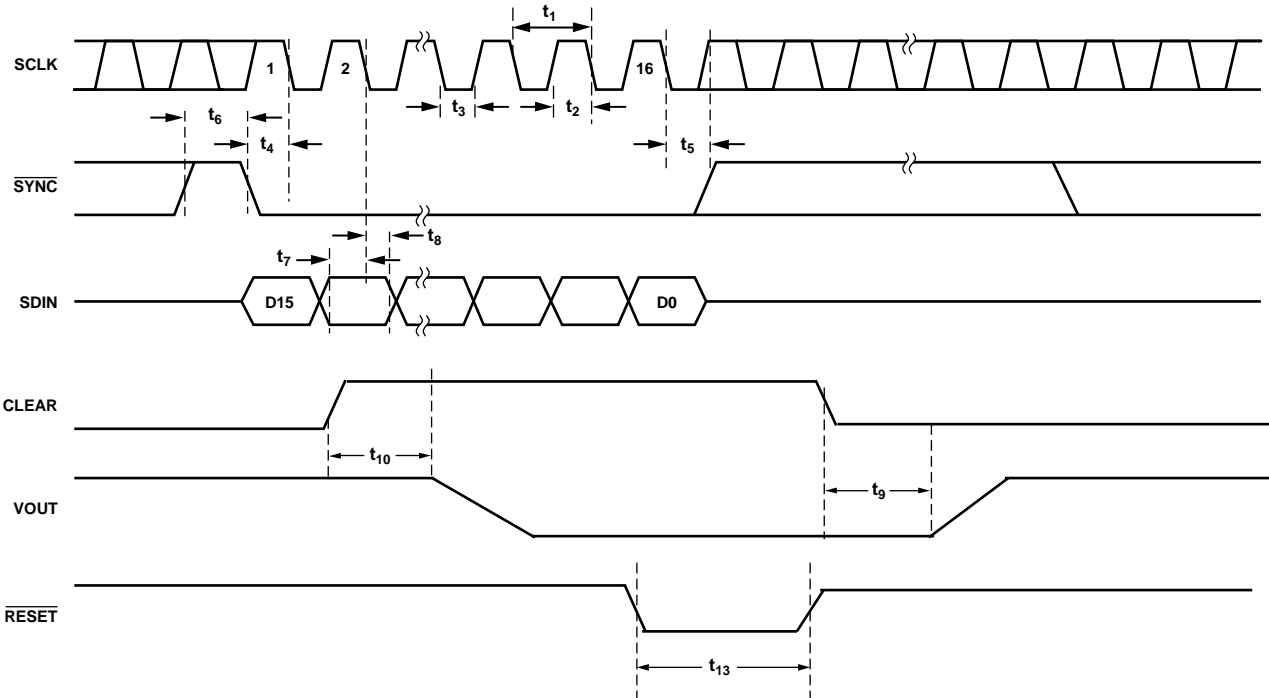


Figure 2. Write Mode Timing Diagram

08922-002

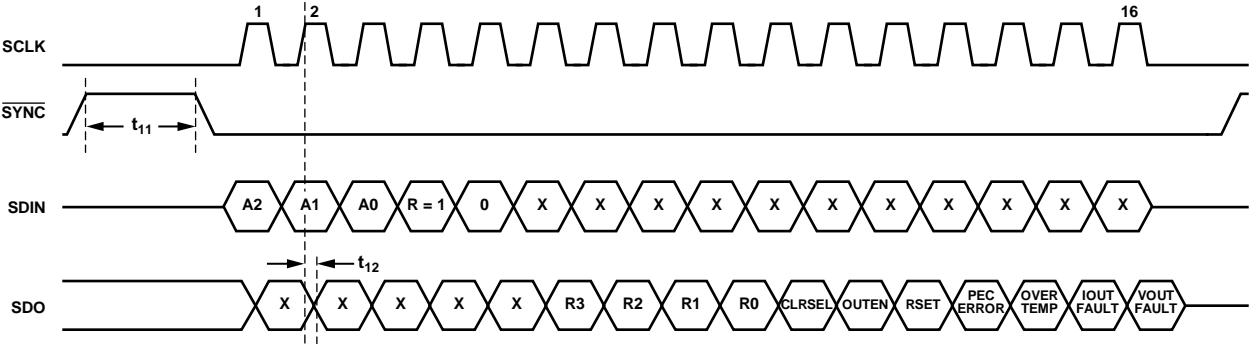


Figure 3. Readback Mode Timing Diagram

08922-003



## ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$  unless otherwise noted.

Transient currents of up to 100 mA do not cause SCR latch-up.

**Table 4.**

| Parameter                                    | Rating  |
|--|---|
| AVDD to GND                                  | −0.3 V to +30 V   |
| AVSS to GND                                  | +0.3 V to −28 V   |
| AVDD to AVSS                                 | −0.3 V to +58 V   |
| DVCC to GND                                  | −0.3 V to +7 V  |
| VSENSE+ to GND                               | AVSS to AVDD  |
| VSENSE− to GND                               | ±5.0 V  |
| Digital Inputs to GND                        | −0.3 V to $DV_{CC} + 0.3\text{ V}$ or 7 V (whichever is less) |
| Digital Outputs to GND                       | −0.3 V to $DV_{CC} + 0.3\text{ V}$ or 7 V (whichever is less) |
| VREF to GND                                  | −0.3 V to +7 V  |
| VIN to GND                                   | −0.3 V to +7 V  |
| VOUT, IOUT to GND                            | AVSS to AVDD  |
| Operating Temperature Range, Industrial      | −40°C to +105°C   |
| Storage Temperature Range                    | −65°C to +150°C   |
| Junction Temperature ( $T_J$ max)            | 125°C   |
| 32-Lead LFCSP Package                        |   |
| $\theta_{JA}$ Thermal Impedance <sup>1</sup> | 42°C/W  |
| Lead Temperature                             | JEDEC industry standard                                       |
| Soldering                                    | J-STD-020   |
| ESD (Human Body Model)                       | 3 kV  |

<sup>1</sup> Simulated data based on a JEDEC 2S2P board with thermal vias.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ESD CAUTION



#### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

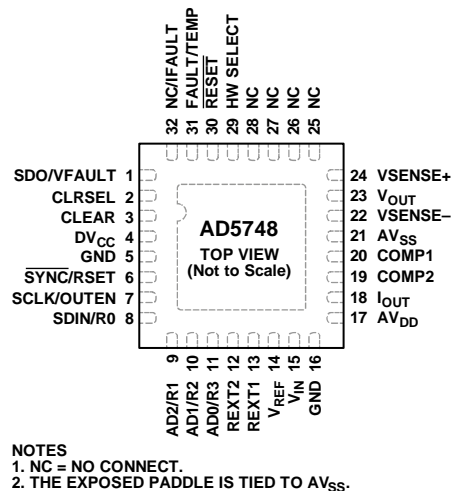


Figure 4. Pin Configuration

Table 4. Pin Function Descriptions

| Pin No. | Mnemonic   | Description  |
|---------|------------|--|
| 1       | SDO/VFAULT | Serial Data Output (SDO). In software mode, this pin is used to clock data from the input shift register in readback mode. Data is clocked out on the rising edge of SCLK and is valid on the falling edge of SCLK. This pin is a CMOS output.<br>Short-Circuit Fault Alert (VFAULT). In hardware mode, this pin acts as a short-circuit fault alert pin and is asserted low when a short-circuit error is detected. This pin is an open-drain output and must be connected to a pull-up resistor. |
| 2       | CLRSEL     | In hardware or software mode, this pin selects the clear value, either zero-scale or midscale code. In software mode, this pin is implemented as a logic OR with the internal CLRSEL bit.  |
| 3       | CLEAR      | Active High Input. Asserting this pin sets the output current/voltage to zero-scale code or midscale code of the range selected (user-selectable). CLEAR is a logic OR with the internal clear bit.<br>In software mode, during power-up, the CLEAR pin level determines the power-on condition of the voltage channel, which can be active 0 V or tristate. See the Asynchronous Clear (CLEAR) section for more details.  |
| 4       | DVCC       | Digital Power Supply.  |
| 5       | GND        | Ground Connection.   |
| 6       | SYNC/RSET  | Positive Edge-Sensitive Latch (SYNC). In software mode, a rising edge parallel loads the input shift register data into the AD5748, also updating the output.<br>Resistor Select (RSET). In hardware mode, this pin chooses whether the internal or the external current sense resistor is used.<br>If RSET = 0, the external sense resistor is chosen.<br>If RSET = 1, the internal sense resistor is chosen.   |
| 7       | SCLK/OUTEN | Serial Clock Input (SCLK). In software mode, data is clocked into the input shift register on the falling edge of SCLK. This pin operates at clock speeds of up to 50 MHz.<br>Output Enable (OUTEN). In hardware mode, this pin acts as an output enable pin.  |
| 8       | SDIN/R0    | Serial Data Input (SDIN). In software mode, data must be valid on the falling edge of SCLK.<br>Range Decode Bit (R0). In hardware mode, this pin, in conjunction with R1, R2, and R3, selects the output current/voltage range setting on the part.  |
| 9       | AD2/R1     | Device Addressing Bit (AD2). In software mode, this pin, in conjunction with AD1 and AD0, allows up to eight devices to be addressed on one bus.<br>Range Decode Bit (R1). In hardware mode, this pin, in conjunction with R0, R2, and R3, selects the output current/voltage range setting on the part.   |
| 10      | AD1/R2     | Device Addressing Bit (AD1). In software mode, this pin, in conjunction with AD2 and AD0 allows up to eight devices to be addressed on one bus.<br>Range Decode Bit (R2). In hardware mode, this pin, in conjunction with R0, R1, and R3, selects the output current/voltage range setting on the part.  |

| Pin No.        | Mnemonic                  | Description   |
|----------------|---------------------------|---|
| 11             | AD0/R3                    | Device Addressing Bit (AD0). In software mode, this pin, in conjunction with AD1 and AD2, allows up to eight devices to be addressed on one bus.<br>Range Decode Bit (R3). In hardware mode, this pin, in conjunction with, R0, R1, and R2, selects the output current/voltage range setting on the part.   |
| 12, 13         | REXT2, REXT1              | A 15 k $\Omega$ external current setting resistor can be connected between the REXT1 and REXT2 pins to improve the IOUT temperature drift performance.  |
| 14             | VREF                      | Buffered Reference Input.   |
| 15             | VIN                       | Buffered Analog Input (0 V to 4.096 V).   |
| 16             | GND                       | Ground Connection.  |
| 17             | AVDD                      | Positive Analog Supply Pin.   |
| 18             | IOUT                      | Current Output Pin.   |
| 19, 20         | COMP2, COMP1              | Optional Compensation Capacitor Connections for the Voltage Output Buffer. These are used to drive higher capacitive loads on the output. These pins also reduce overshoot on the output. Care should be taken when choosing the value of the capacitor connected between the COMP1 and COMP2 pins because it has a direct influence on the settling time of the output. See the Driving Large Capacitive Loads section for further details.  |
| 21             | AVSS                      | Negative Analog Supply Pin.   |
| 22             | VSENSE–                   | Sense Connection for the Negative Voltage Output Load Connection. This pin must stay within $\pm 3.0$ V of ground for correct operation.  |
| 23             | VOUT                      | Buffered Analog Output Voltage.   |
| 24             | VSENSE+                   | Sense Connection for the Positive Voltage Output Load Connection.   |
| 25, 26, 27, 28 | NC                        | No Connect. Can be tied to GND.   |
| 29             | HW SELECT                 | This pin is used to configure the part to hardware or software mode.<br>HW SELECT = 0 selects software control.<br>HW SELECT = 1 selects hardware control.  |
| 30             | $\overline{\text{RESET}}$ | Resets the part to its power-on state.  |
| 31             | FAULT/TEMP                | Fault Alert (FAULT). In software mode, this pin acts as a general fault alert pin. It is asserted low when an open circuit, short circuit, overtemperature error, or PEC interface error is detected. This pin is an open-drain output and must be connected to a pull-up resistor.<br>Overtemperature Fault (TEMP). In hardware mode, this pin acts as an overtemperature fault pin. It is asserted low when an overtemperature error is detected. This pin is an open-drain output and must be connected to a pull-up resistor. |
| 32             | NC/IFault                 | No Connect (NC). In software mode, this pin is a no connect. Instead, tie this pin to GND.<br>Open-Circuit Fault Alert (IFault). In hardware mode, this pin acts as an open-circuit fault alert pin. It is asserted low when an open-circuit error is detected. This pin is an open-drain output and must be connected to a pull-up resistor.   |
| 33 (EPAD)      | Exposed paddle            | The exposed paddle is tied to AVSS.   |

## TYPICAL PERFORMANCE CHARACTERISTICS

## VOLTAGE OUTPUT

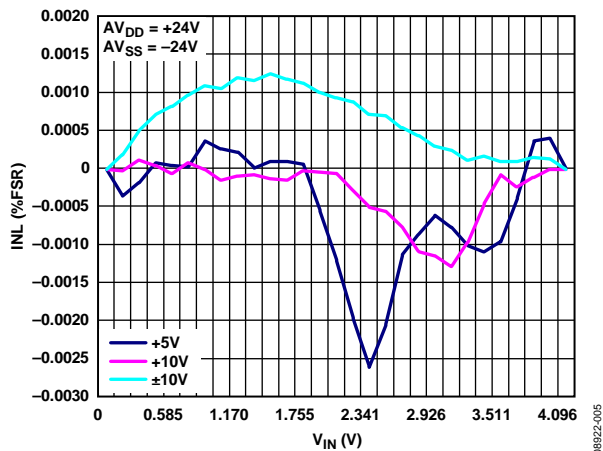
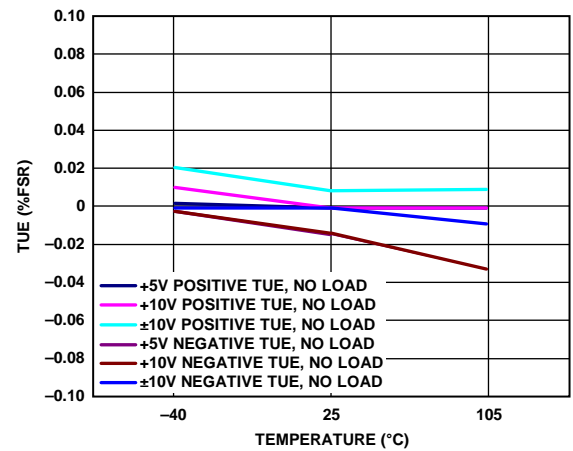
Figure 5. Integral Nonlinearity Error vs.  $V_{IN}$ 

Figure 8. Total Unadjusted Error vs. Temperature

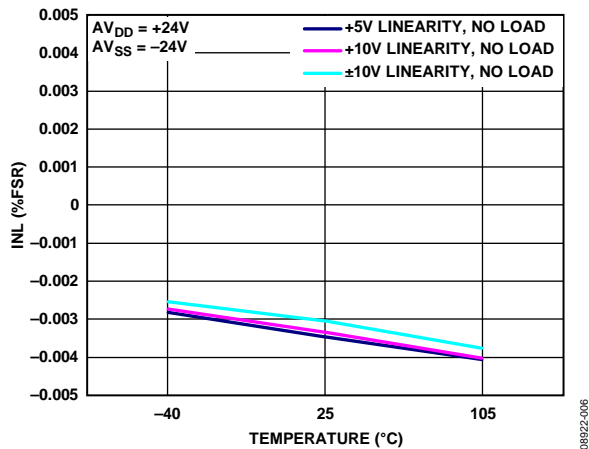


Figure 6. Integral Nonlinearity Error vs. Temperature

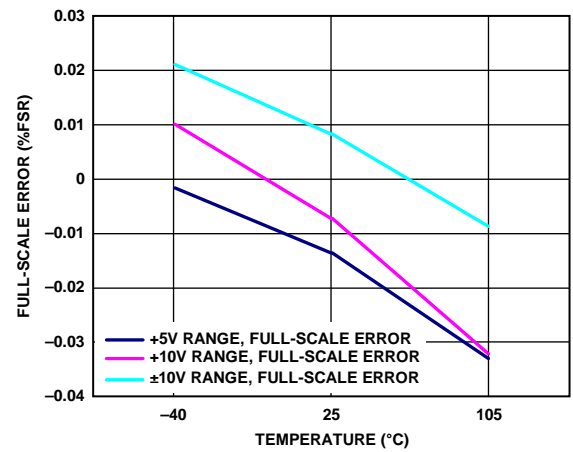


Figure 9. Full-Scale Error vs. Temperature

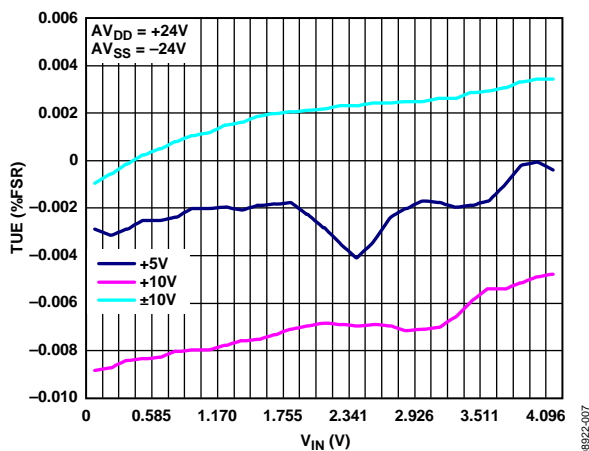
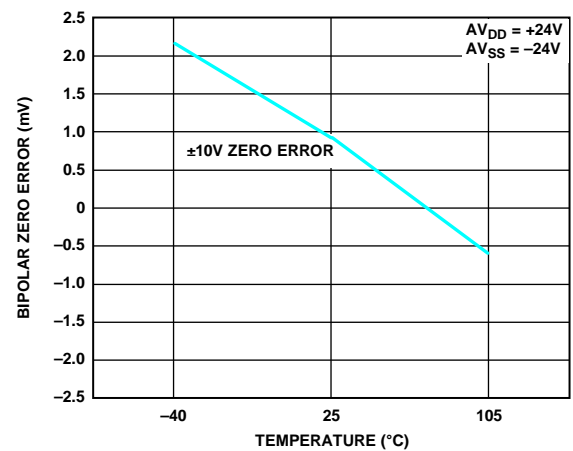
Figure 7. Total Unadjusted Error vs.  $V_{IN}$ 

Figure 10. Bipolar Zero Error vs. Temperature

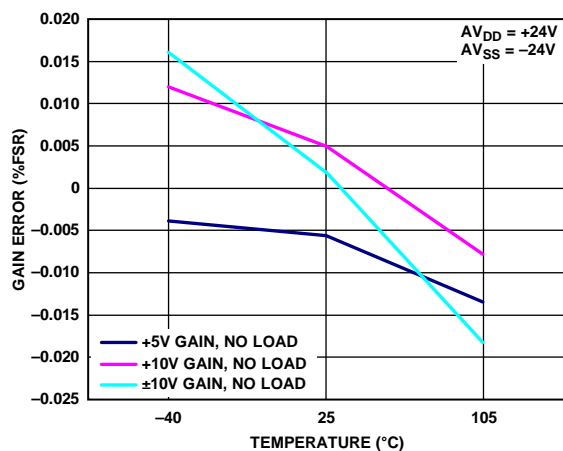


Figure 11. Gain Error vs. Temperature

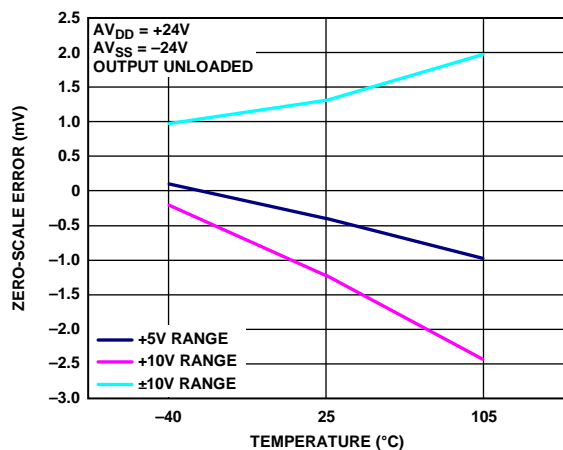


Figure 12. Zero-Scale Error (Offset Error) vs. Temperature

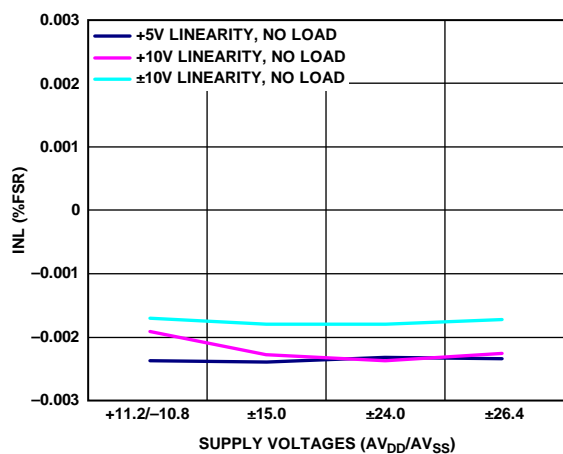


Figure 13. Integral Nonlinearity Error vs. Supply Voltage

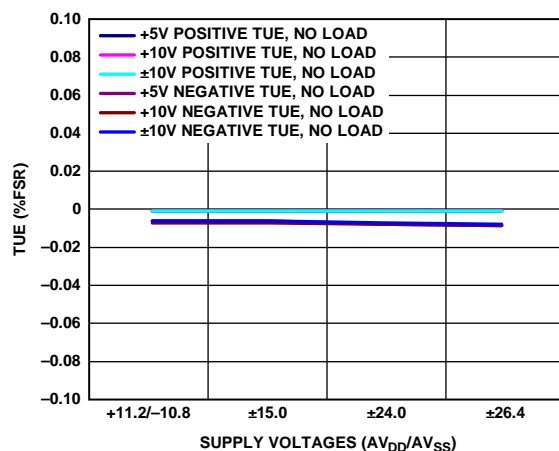


Figure 14. Total Unadjusted Error vs. Supply Voltages

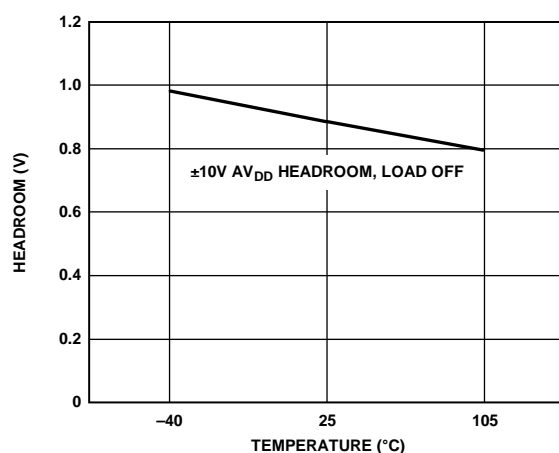
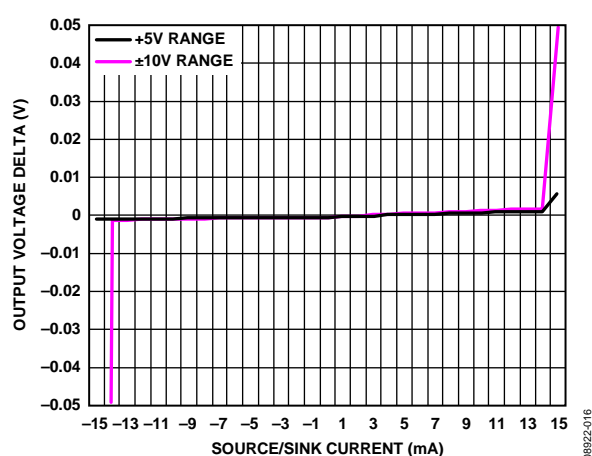
Figure 15.  $AV_{DD}$  Headroom, ±10V Range, Output Set to 10V, Load Off

Figure 16. Source and Sink Capability of Output Amplifier

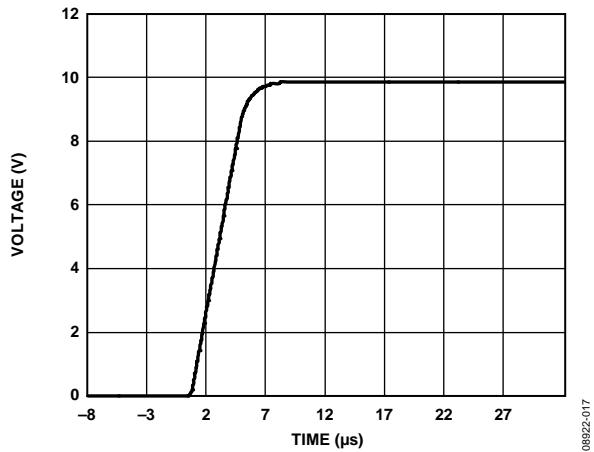


Figure 17. Full-Scale Positive Step

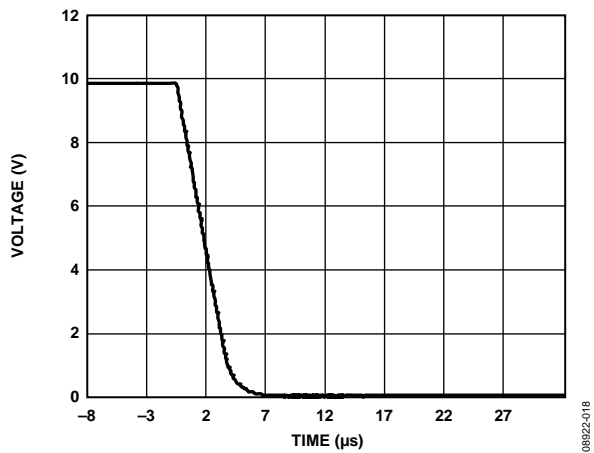


Figure 18. Full-Scale Negative Step

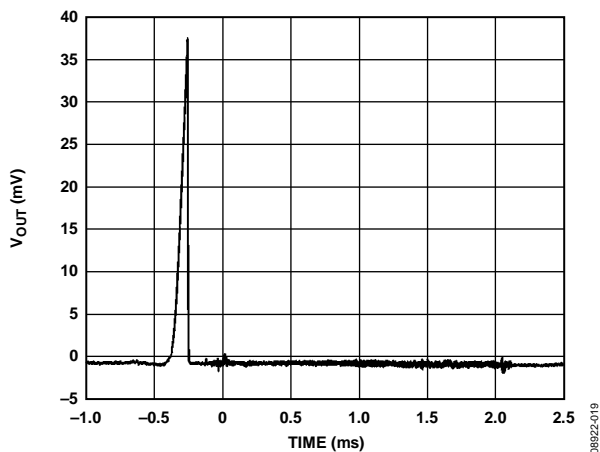
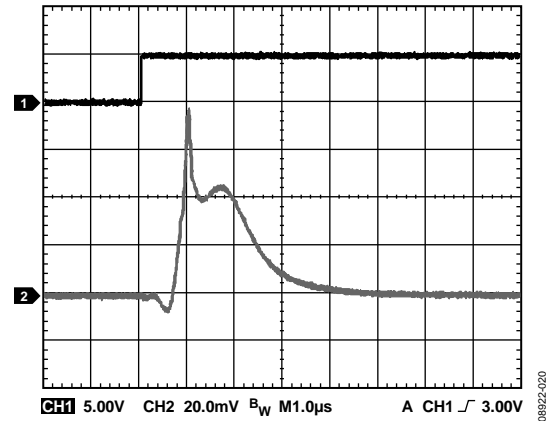
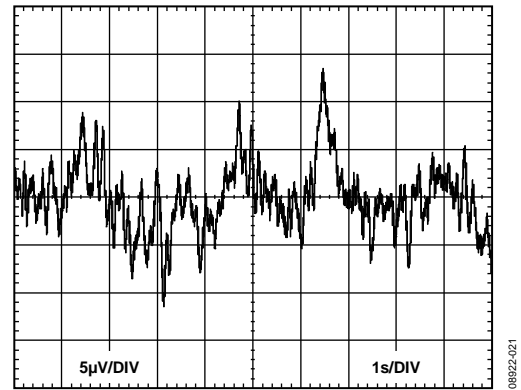
Figure 19.  $V_{OUT}$  vs. Time on Power-Up, Load =  $2\text{ k}\Omega \parallel 200\text{ pF}$ Figure 20.  $V_{OUT}$  Enable Glitch, Load =  $2\text{ k}\Omega \parallel 1\text{ nF}$ 

Figure 21. Peak-to-Peak Noise (0.1 Hz to 10 Hz Bandwidth)

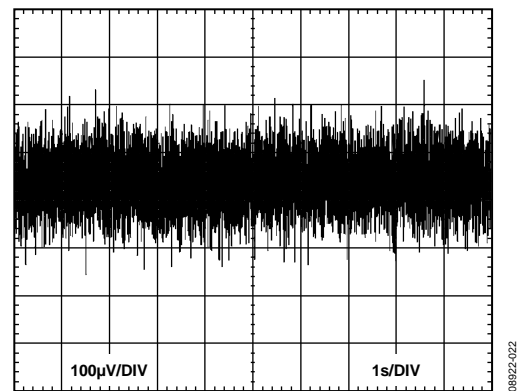


Figure 22. Peak-to-Peak Noise (100 kHz Bandwidth)

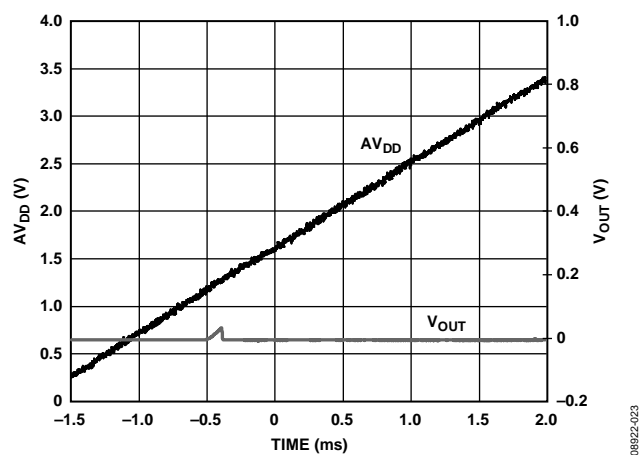
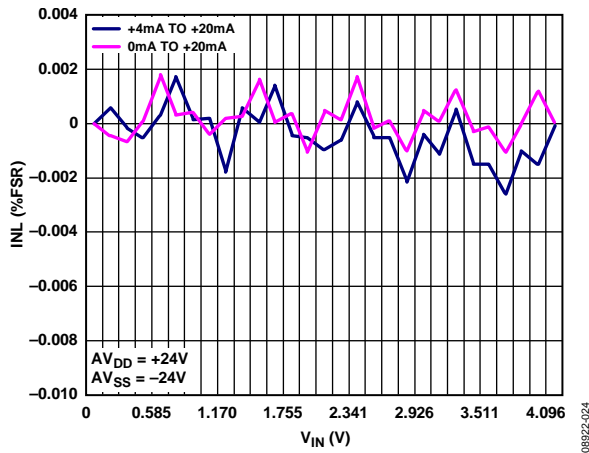
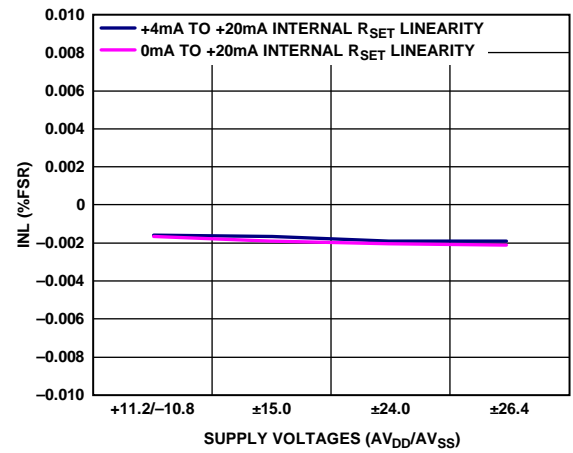
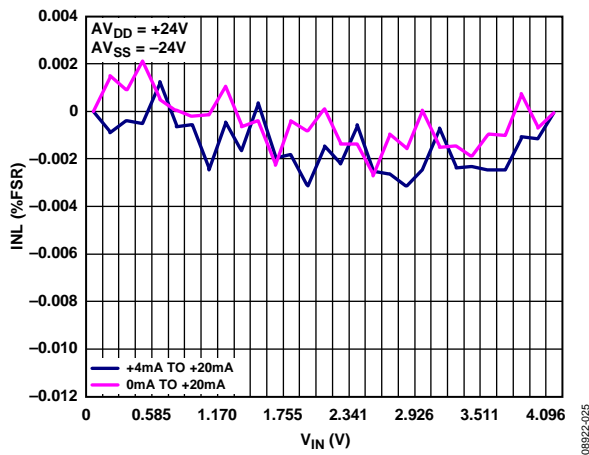
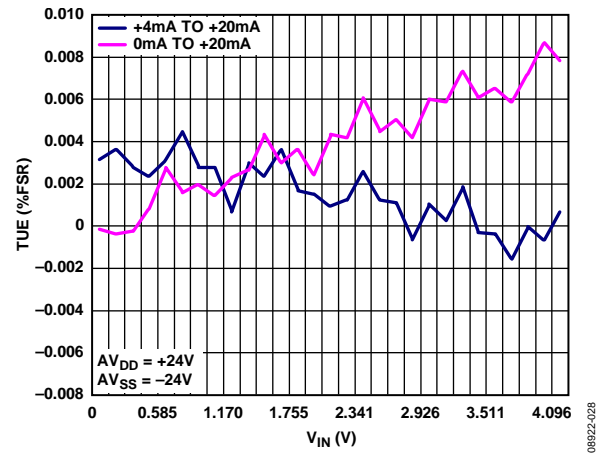
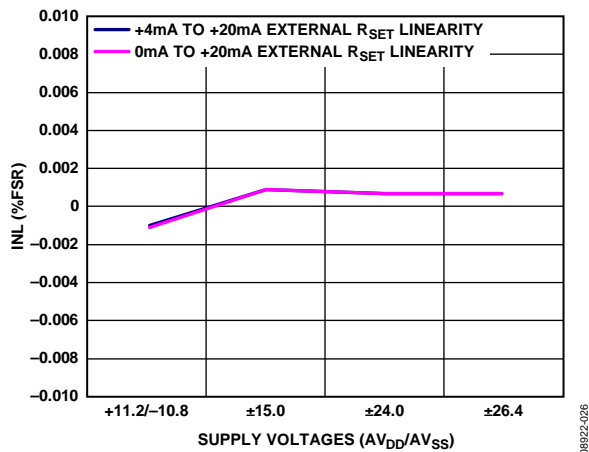
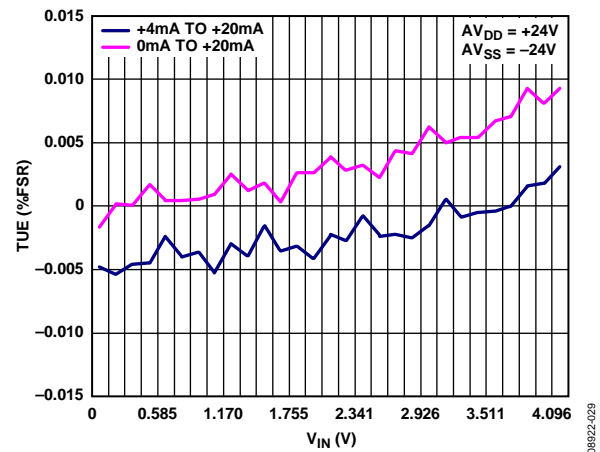








Figure 23.  $AV_{DD}$  and  $V_{OUT}$  vs. Time on Power-Up







08922-023

## CURRENT OUTPUT

Figure 24. Integral Nonlinearity Error vs.  $V_{IN}$ , External  $R_{SET}$  ResistorFigure 27. Integral Nonlinearity Error Current Mode, Internal  $R_{SET}$  Sense ResistorFigure 25. Integral Nonlinearity Error vs.  $V_{IN}$ , Internal  $R_{SET}$  ResistorFigure 28. Total Unadjusted Error vs.  $V_{IN}$ , External  $R_{SET}$  ResistorFigure 26. Integral Nonlinearity Error, Current Mode, External  $R_{SET}$  Sense ResistorFigure 29. Total Unadjusted Error vs.  $V_{IN}$ , Internal  $R_{SET}$  Resistor



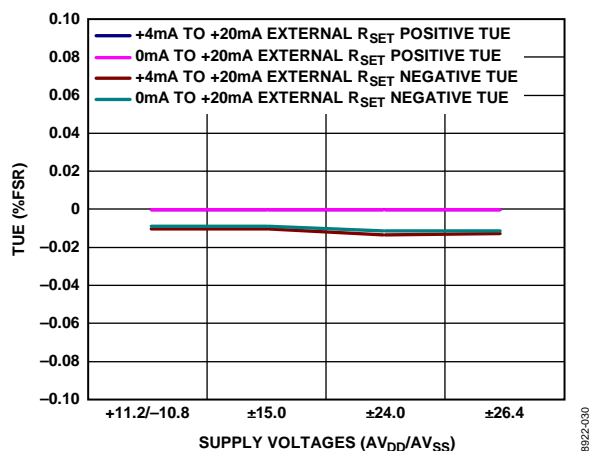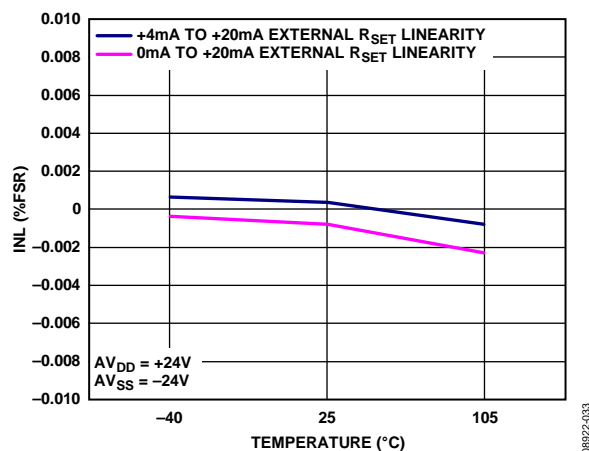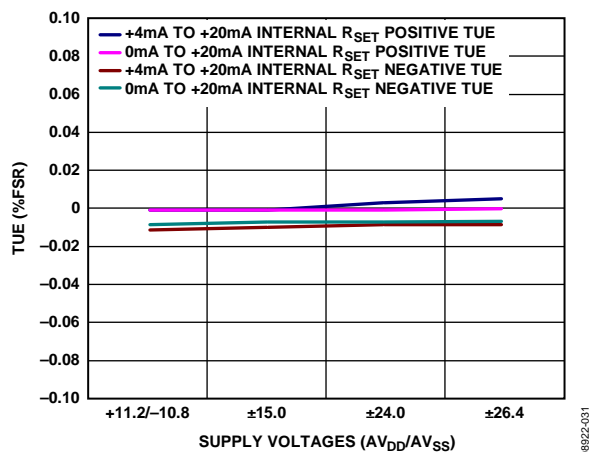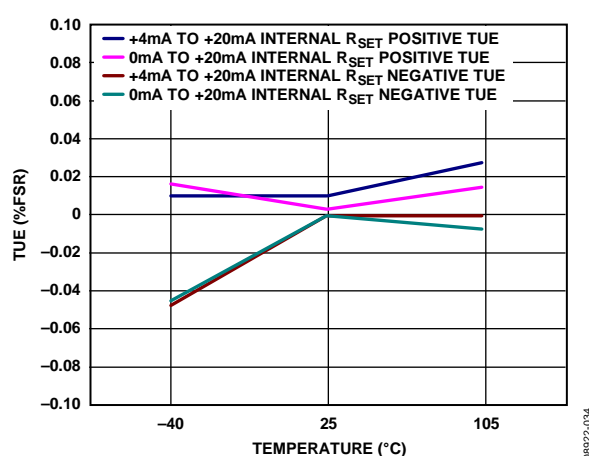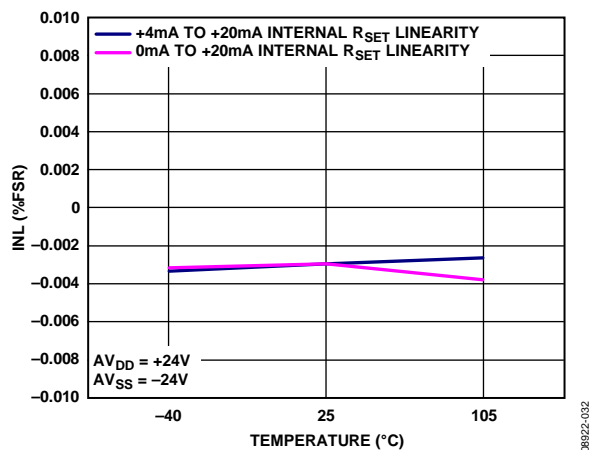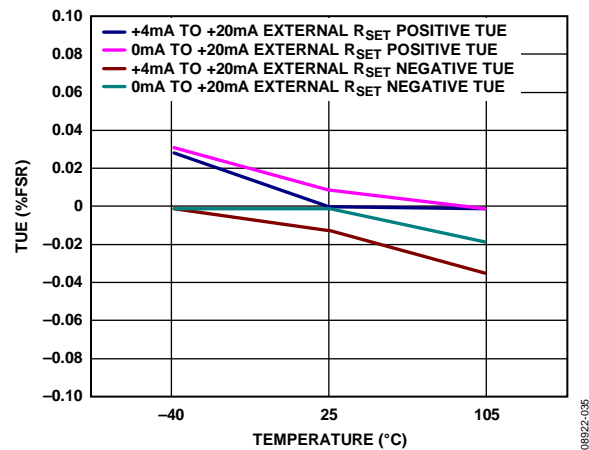Figure 30. Total Unadjusted Error Current Mode, External  $R_{SET}$  Sense ResistorFigure 33. INL vs. Temperature, External  $R_{SET}$  Sense ResistorFigure 31. Total Unadjusted Error Current Mode, Internal  $R_{SET}$  Sense ResistorFigure 34. Total Unadjusted Error vs. Temperature, Internal  $R_{SET}$  Sense ResistorFigure 32. INL vs. Temperature, Internal  $R_{SET}$  Sense ResistorFigure 35. Total Unadjusted Error vs. Temperature, External  $R_{SET}$  Sense Resistor

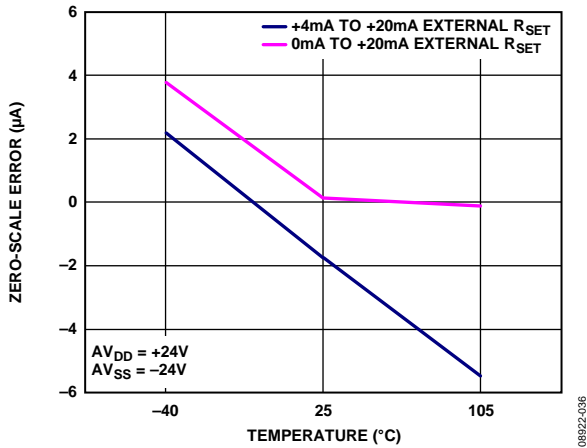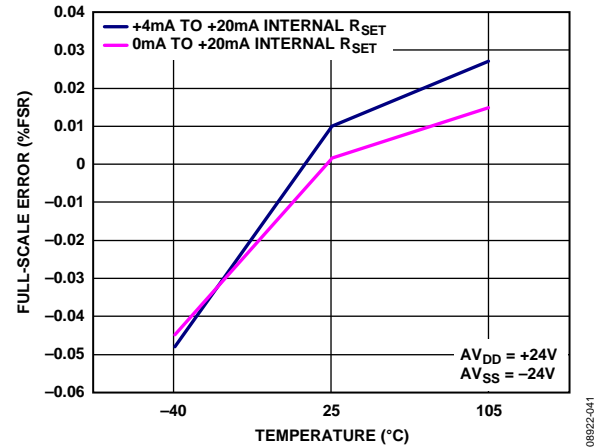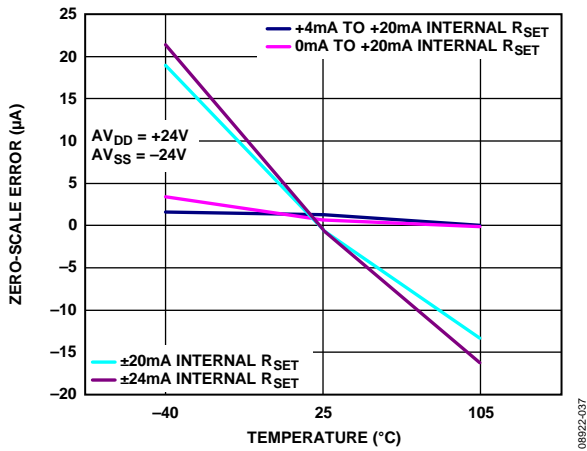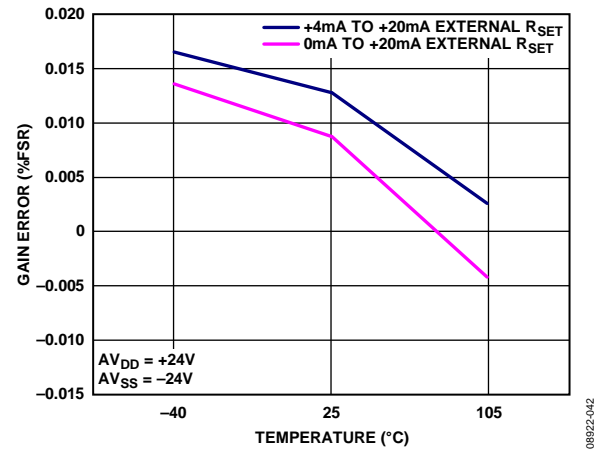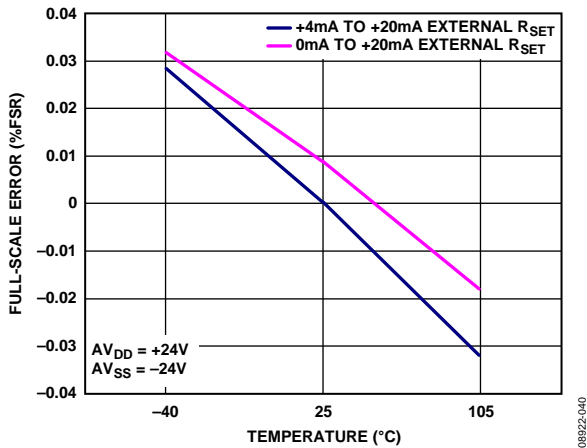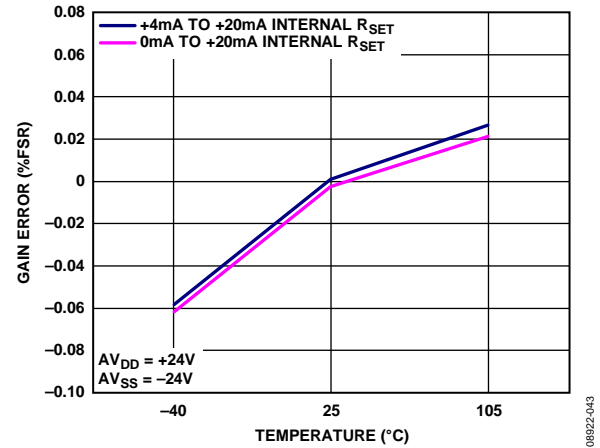Figure 36. Zero-Scale Error vs. Temperature, External  $R_{SET}$  Sense ResistorFigure 39. Full-Scale Error vs. Temperature, Internal  $R_{SET}$  Sense ResistorFigure 37. Zero-Scale Error vs. Temperature, Internal  $R_{SET}$  Sense ResistorFigure 40. Gain Error vs. Temperature, External  $R_{SET}$  Sense ResistorFigure 38. Full-Scale Error vs. Temperature, External  $R_{SET}$  Sense ResistorFigure 41. Gain Error vs. Temperature, Internal  $R_{SET}$  Sense Resistor

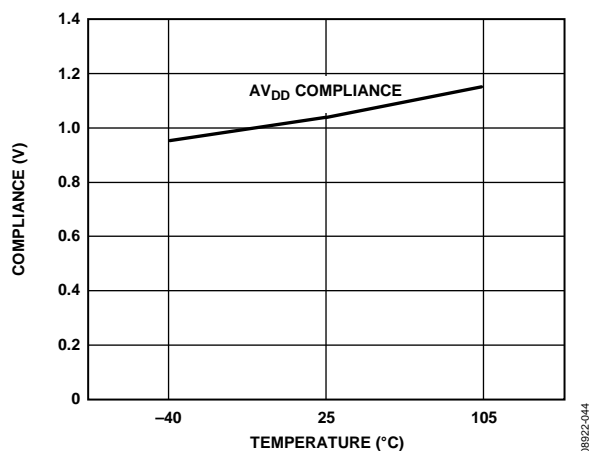


Figure 42. Output Compliance vs. Temperature Tested When  $I_{OUT} = 10.8 \text{ mA}$

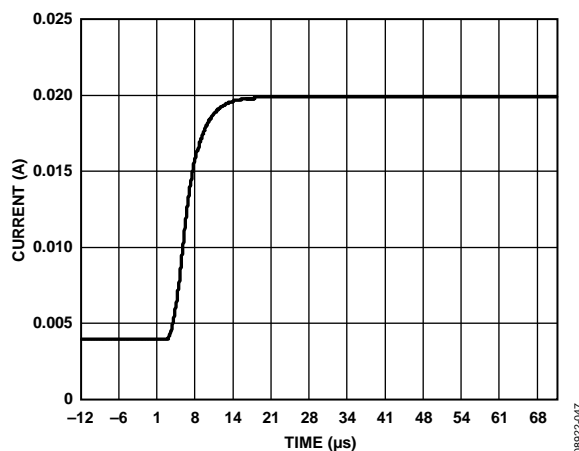


Figure 45. 4 mA to 20 mA Output Current Step

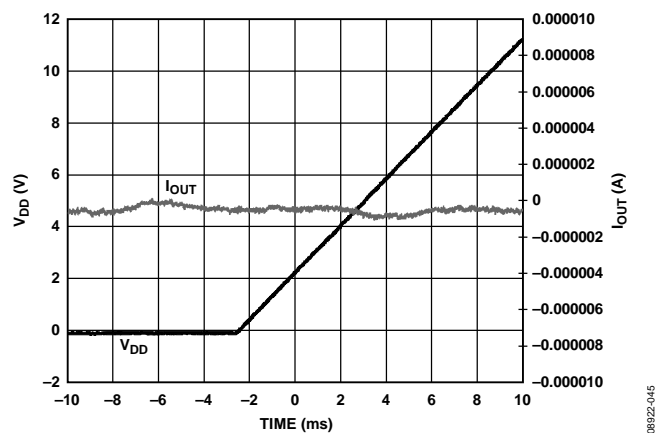


Figure 43. Output Current vs. Time on Power-Up

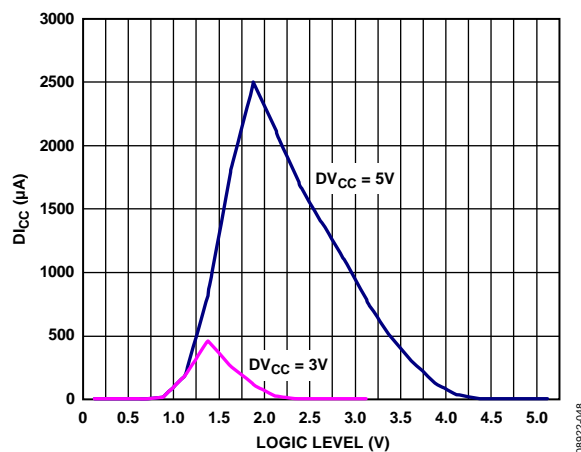


Figure 46.  $D_{ICC}$  vs. Logic Input Voltage

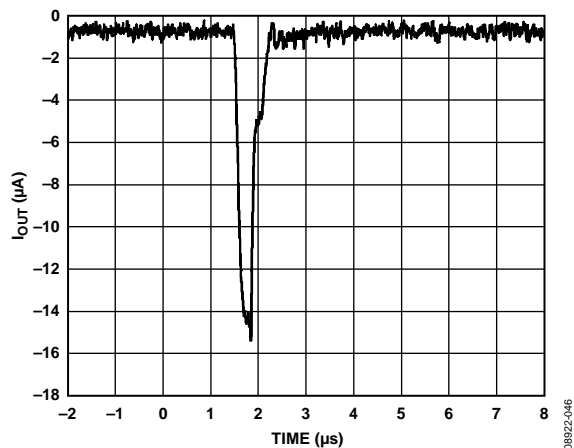


Figure 44. Output Current vs. Time on Output Enable

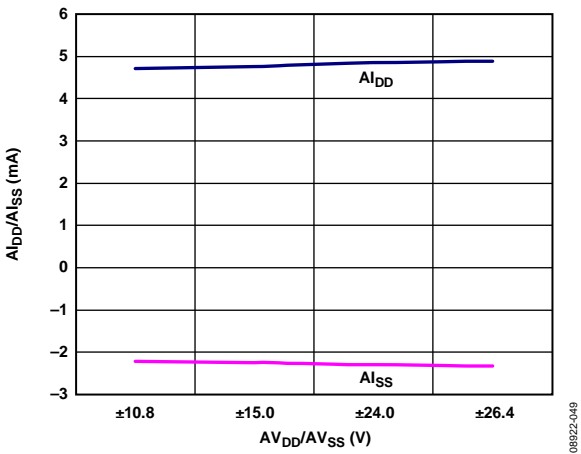


Figure 47.  $A I_{DD}/A I_{SS}$  vs.  $A V_{DD}/A V_{SS}$ ,  $V_{OUT} = 0$  V

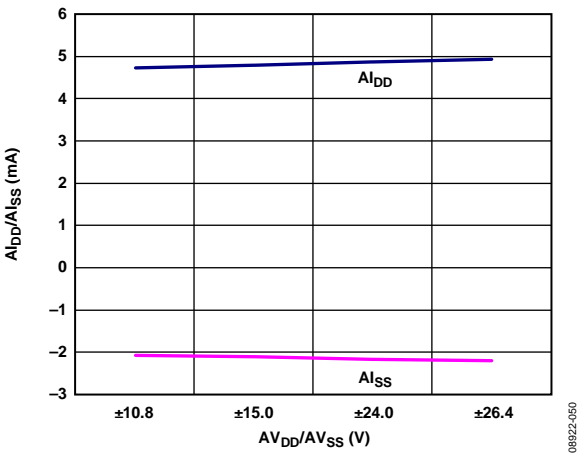


Figure 48.  $A I_{DD}/A I_{SS}$  vs.  $A V_{DD}/A V_{SS}$ ,  $I_{OUT} = 0$  mA

## TERMINOLOGY

### Total Unadjusted Error (TUE)

TUE is a measure of the output error taking all the various errors into account: INL error, offset error, gain error, and output drift over supplies, temperature, and time. TUE is expressed as a percentage of full-scale range (% FSR).

### Relative Accuracy or Integral Nonlinearity (INL)

INL is a measure of the maximum deviation, in % FSR, from a straight line passing through the endpoints of the output driver transfer function. A typical INL vs. input voltage plot can be seen in Figure 5.

### Bipolar Zero Error

Bipolar zero error is the deviation of the actual vs. ideal half-scale output of 0 V/0 mA with a bipolar range selected. A plot of bipolar zero error vs. temperature can be seen in Figure 10.

### Bipolar Zero TC

Bipolar zero TC is a measure of the change in the bipolar zero error with a change in temperature. It is expressed in ppm FSR/°C.

### Full-Scale Error

Full-scale error is the deviation of the actual full-scale analog output from the ideal full-scale output. Full-scale error is expressed as a percentage of full-scale range (% FSR).

### Full-Scale TC

Full-scale TC is a measure of the change in the full-scale error with a change in temperature. It is expressed in ppm FSR/°C.

### Gain Error

Gain error is a measure of the span error of the output. It is the deviation in slope of the output transfer characteristic from the ideal expressed in % FSR. A plot of gain error vs. temperature can be seen in Figure 11.

### Gain Error TC

Gain error TC is a measure of the change in gain error with changes in temperature. Gain error TC is expressed in ppm FSR/°C.

### Zero-Scale Error

Zero-scale error is the deviation of the actual zero-scale analog output from the ideal zero-scale output. Zero-scale error is expressed in millivolts (mV).

### Zero-Scale TC

Zero-scale TC is a measure of the change in zero-scale error with a change in temperature. Zero-scale error TC is expressed in ppm FSR/°C.

### Offset Error

Offset error is a measurement of the difference between VOUT (actual) and VOUT (ideal) expressed in millivolts (mV) in the linear region of the transfer function. It can be negative or positive.

### Output Voltage Settling Time

Output voltage settling time is the amount of time it takes for the output to settle to a specified level for a half-scale input change.

### Slew Rate

The slew rate of a device is a limitation in the rate of change of the output voltage. The output slewing speed is usually limited by the slew rate of the amplifier used at its output. Slew rate is measured from 10% to 90% of the output signal and is expressed in V/μs.

### Current Loop Voltage Compliance

Current loop voltage compliance is the maximum voltage at the IOUT pin for which the output current is equal to the programmed value.

### Power-On Glitch Energy

Power-on glitch energy is the impulse injected into the analog output when the AD5748 is powered on. It is specified as the area of the glitch in nV-sec.

### Power Supply Rejection Ratio (PSRR)

PSRR indicates how the output is affected by changes in the power supply voltage.

## THEORY OF OPERATION

The **AD5748** is a single-channel, precision, voltage/current output driver with hardware or software programmable output ranges. The software ranges are configured via an SPI-/MICROWIRE-compatible serial interface. The analog input to the **AD5748** is provided from a low voltage, single-supply, digital-to-analog converter and is internally conditioned to provide the desired output current/voltage range. The analog input range is 0 V to 4.096 V.

The output current range is programmable across two current ranges: 4 mA to 21 mA and 0 mA to 21 mA.

The voltage output is provided from a separate pin that can be configured to provide 0 V to 5 V, 0 V to 10.5 V, or  $\pm 10.5$  V output ranges. The current and voltage outputs are available on separate pins. Only one output can be enabled at one time. The output range is selected by programming the R3 to R0 bits in the control register (see Table 6 and Table 7).

Figure 49 and Figure 50 show a typical configuration of the **AD5748** in software mode and in hardware mode, respectively, in an output module system. The HW SELECT pin selects whether the part is configured in software or hardware mode. The analog input to the **AD5748** is provided from a low voltage, single-supply, digital-to-analog converter (DAC) such as the **AD506x** or **AD566x**, which provides an output range of 0 V to 4.096 V. The supply and reference for the DAC, as well as the reference for the **AD5748**, can be supplied from a reference such as the **ADR392**. The **AD5748** can operate from supplies up to  $\pm 26.4$  V.

### SOFTWARE MODE

In current mode, software-selectable output ranges include 0 mA to 21 mA, and 4 mA to 21 mA.

In voltage mode, software-selectable output ranges include 0 V to 5 V, 0 V to 10.5 V, and  $\pm 10.5$  V.

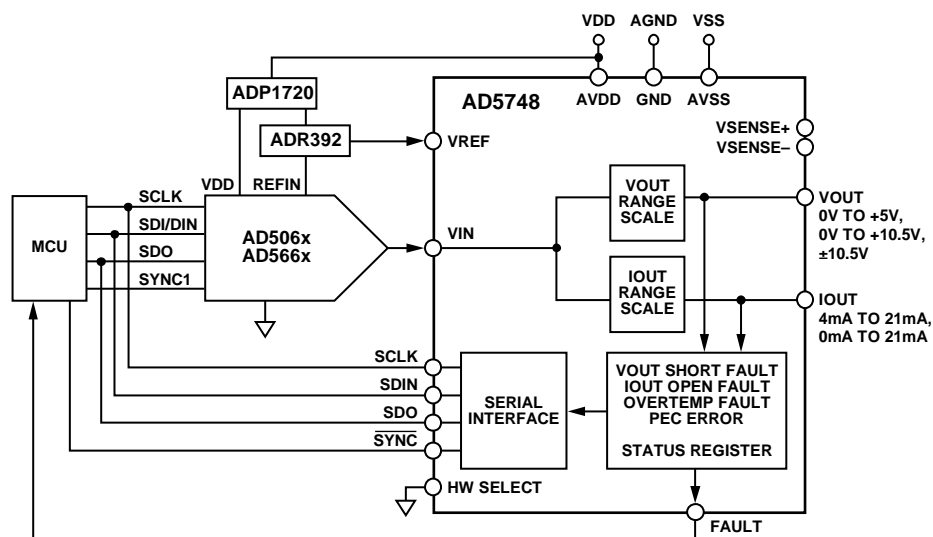


Figure 49. Typical System Configuration in Software Mode (Pull-Up Resistors Not Shown for Open-Drain Outputs)

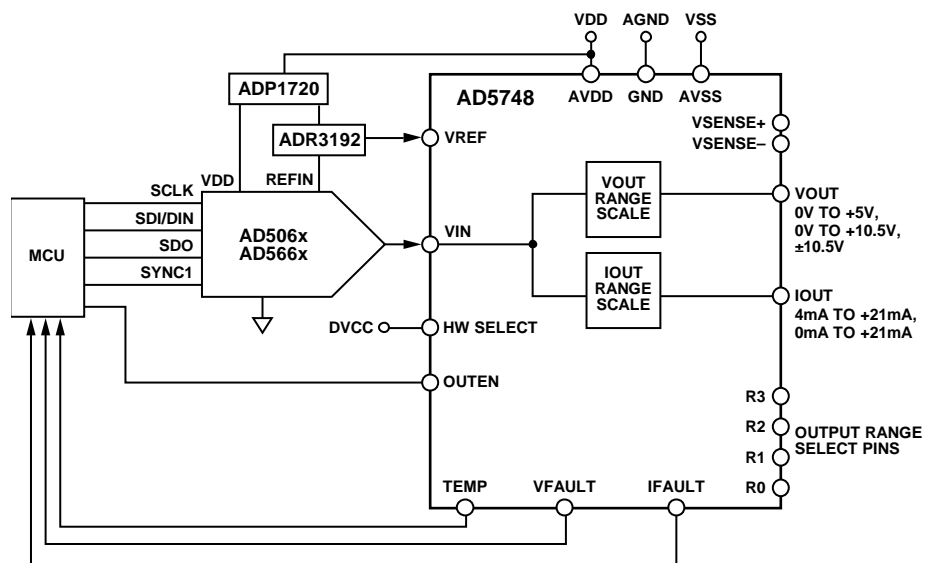


Figure 50. Typical System Configuration in Hardware Mode Using Internal DAC Reference (Pull-Up Resistors Not Shown for Open-Drain Outputs)

Table 5. Suggested Parts for Use with AD5748

| DAC     | Reference           | Power                | Accuracy   | Description   |
|---------|---------------------|----------------------|------------|---|
| AD5660  | Internal            | ADP1720 <sup>1</sup> | 12-bit INL | Mid end system, single channel, internal reference  |
| AD5664R | Internal            | N/A                  | N/A        | Mid end system, quad channel, internal reference    |
| AD5668  | Internal            | N/A                  | N/A        | Mid end system, octal channel, internal reference   |
| AD5060  | ADR434              | ADP1720              | 16-bit INL | High end system, single channel, external reference |
| AD5064  | ADR434              | N/A                  | N/A        | High end system, quad channel, external reference   |
| AD5662  | ADR392 <sup>2</sup> | ADR392 <sup>2</sup>  | 12-bit INL | Mid end system, single channel, external reference  |
| AD5664  | ADR392 <sup>2</sup> | N/A                  | N/A        | Mid end system, quad channel, external reference    |

<sup>1</sup> ADP1720 input range up to 28 V.

<sup>2</sup> ADR392 input range up to 15 V.

## CURRENT OUTPUT ARCHITECTURE

The voltage input from the analog input VIN pin (0 V to 4.096 V) is either converted to a current (see Figure 51), which is then mirrored to the supply rail so that the application simply sees a current source output with respect to an internal reference voltage, or buffered and scaled to output a software-selectable unipolar or bipolar voltage range (see Figure 52). The reference is used to provide internal offsets for range and gain scaling. The selectable output range is programmable through the digital interface.

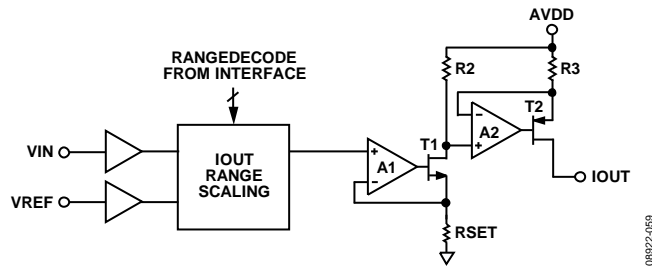


Figure 51. Current Output Configuration

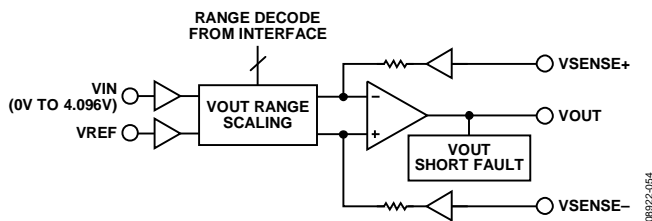


Figure 52. Voltage Output

## DRIVING INDUCTIVE LOADS

When driving inductive or poorly defined loads, connect a 0.01  $\mu\text{F}$  capacitor between IOUT and GND. This ensures stability with loads beyond 50 mH. There is no maximum capacitance limit. The capacitive component of the load may cause slower settling.

### Voltage Output Amplifier

The voltage output amplifier is capable of generating both unipolar and bipolar output voltages. It is capable of driving a load of 1 k $\Omega$  in parallel with 1.2  $\mu\text{F}$  (with an external compensation capacitor on the COMP1 and COMP2 pins). The source and sink capabilities of the output amplifier can be seen in Figure 16. The slew rate is 2 V/ $\mu\text{s}$ .

Internal to the device, there is a 2.5 M $\Omega$  resistor connected between the VOUT and VSENSE+ pins and similarly between the VSENSE- pin and the internal device ground. Should a fault condition occur, these resistors act to protect the AD5748 by ensuring that the amplifier loop is closed so that the part does not enter into an open-loop condition.

The VSENSE- pin can work in a common-mode range of  $\pm 3$  V with respect to the remote load ground point.

The current and voltage are output on separate pins and cannot be output simultaneously. This allows the user to tie both the current and voltage output pins together and configure the end system as a single-channel output.

## Driving Large Capacitive Loads

The voltage output amplifier is capable of driving capacitive loads of up to 1  $\mu\text{F}$  with the addition of a nonpolarized compensation capacitor between the COMP1 and COMP2 pins.

Without the compensation capacitor, up to 20 nF capacitive loads can be driven. Care should be taken to choose an appropriate value for the C<sub>COMP</sub> capacitor. This capacitor, while allowing the AD5748 to drive higher capacitive loads and reduce overshoot, increases the settling time of the part and, therefore, affects the bandwidth of the system. Considered values of this capacitor should be in the range 100 pF to 4 nF depending on the trade-off required between settling time, overshoot, and bandwidth.

## POWER-ON STATE OF THE AD5748

On power-up, the AD5748 senses whether hardware or software mode is loaded and sets the power-up conditions accordingly.

In software SPI mode, the power-up state of the output is dependent on the state of the CLEAR pin. If the CLEAR pin is pulled high, then the part powers up, driving an active 0 V on the output. If the CLEAR pin is pulled low, then the part powers up with the voltage output channel in tristate mode. In both cases, the current output channel powers up in a tristate condition (0 mA). This allows the voltage and current outputs to be connected together if desired.

To put the part into normal operation, the user must set the OUTEN bit in the control register to enable the output and, in the same write, set the output range configuration using the R3 to R0 range bits. If the CLEAR pin is still high (active) during this write, the part automatically clears to its normal clear state as defined by the programmed range and by the CLRSEL pin or CLRSEL bit (see the Asynchronous Clear (CLEAR) section for more details). The CLEAR pin must be taken low to operate the part in normal mode.

The CLEAR pin is typically driven directly from a microcontroller. In cases where the power supply for the AD5748 supply may be independent of the microcontroller power supply, the user can connect a weak pull-up resistor to DVCC or a pull-down resistor to ground to ensure that the correct power-up condition is achieved independent of the microcontroller. A 10 k $\Omega$  pull-up/pull-down resistor on the CLEAR pin should be sufficient for most applications.

If hardware mode is selected, the part powers up to the conditions defined by the R3 to R0 range bits and the status of the OUTEN or CLEAR pin. It is recommended to keep the output disabled when powering up the part in hardware mode.



## DEFAULT REGISTERS AT POWER-ON

The AD5748 power-on reset circuit ensures that all registers are loaded with zero code.

In software SPI mode, the part powers up with all outputs disabled (OUTEN bit = 0). The user must set the OUTEN bit in the control register to enable the output and, in the same write, set the output range configuration using the R3 to R0 bits.

If hardware mode is selected, the part powers up to the conditions defined by the R3 to R0 bits and the status of the OUTEN pin. It is recommended to keep the output disabled when powering up the part in hardware mode.

## RESET FUNCTION

In software mode, the part can be reset using the  $\overline{\text{RESET}}$  pin (active low) or the reset bit (reset = 1). A reset disables both the current and voltage outputs to their power-on condition. The user must write to the OUTEN bit to enable the output and, in the same write, set the output range configuration. The  $\overline{\text{RESET}}$  pin is a level-sensitive input; the part stays in reset mode as long as the  $\overline{\text{RESET}}$  pin is low. The reset bit clears to 0 following a reset command to the control register.

In hardware mode, there is no reset. If using the part in hardware mode, the  $\overline{\text{RESET}}$  pin should be tied high.

## OUTEN

In software mode, the output can be enabled or disabled using the OUTEN bit in the control register. When the output is

disabled, both the current and voltage channels go into tristate. The user must set the OUTEN bit to enable the output and simultaneously set the output range configuration.

In hardware mode, the output can be enabled or disabled using the OUTEN pin. When the output is disabled, both the current and voltage channels both go into tristate. The user must write to the OUTEN pin to enable the output. It is recommended that the output be disabled when changing the ranges.

## SOFTWARE CONTROL

Software control is enabled by connecting the HW SELECT pin to ground. In software mode, the AD5748 is controlled over a versatile 3-wire serial interface that operates at clock rates of up to 50 MHz. It is compatible with SPI, QSPI™, MICROWIRE, and DSP standards.

### Input Shift Register

The input shift register is 16 bits wide. Data is loaded into the device MSB first as a 16-bit word under the control of a serial clock input, SCLK. Data is clocked in on the falling edge of SCLK. The input shift register consists of 16 control bits, as shown in Table 6. The timing diagram for this write operation is shown in Figure 2. The first three bits of the input shift register are used to set the hardware address of the AD5748 device on the printed circuit board (PCB). Up to eight devices can be addressed per board.

Bit D11, Bit D1, and Bit D0 must always be set to 0 during any write sequence.

**Table 6. Input Shift Register Contents for a Write Operation—Control Register**

| MSB |     |     |     |     |     |    |    |    |        |       |       |      |       | LSB |    |
|-----|-----|-----|-----|-----|-----|----|----|----|--------|-------|-------|------|-------|-----|----|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6     | D5    | D4    | D3   | D2    | D1  | D0 |
| A2  | A1  | A0  | R/W | 0   | R3  | R2 | R1 | R0 | CLRSEL | OUTEN | Clear | RSET | Reset | 0   | 0  |

**Table 7. Input Shift Register Descriptions**

| Bit        | Description  |    |    |   |
|------------|--|----|----|---|
| A2, A1, A0 | Used in association with the AD2, AD1, and AD0 external pins to determine which part is being addressed by the system controller |    |    |   |
|            | A2   | A1 | A0 | Function  |
|            | 0  | 0  | 0  | Addresses part with Pin AD2 = 0, Pin AD1 = 0, Pin AD0 = 0 |
|            | 0  | 0  | 1  | Addresses part with Pin AD2 = 0, Pin AD1 = 0, Pin AD0 = 1 |
|            | 0  | 1  | 0  | Addresses part with Pin AD2 = 0, Pin AD1 = 1, Pin AD0 = 0 |
|            | 0  | 1  | 1  | Addresses part with Pin AD2 = 0, Pin AD1 = 1, Pin AD0 = 1 |
|            | 1  | 0  | 0  | Addresses part with Pin AD2 = 1, Pin AD1 = 0, Pin AD0 = 0 |
|            | 1  | 0  | 1  | Addresses part with Pin AD2 = 1, Pin AD1 = 0, Pin AD0 = 1 |
|            | 1  | 1  | 0  | Addresses part with Pin AD2 = 1, Pin AD1 = 1, Pin AD0 = 0 |
|            | 1  | 1  | 1  | Addresses part with Pin AD2 = 1, Pin AD1 = 1, Pin AD0 = 1 |
| R/W        | Indicates a read from or a write to the addressed register   |    |    |   |

| Bit            | Description  |   |   |    |    |   |
|----------------|--|---|---|----|----|---|
| R3, R2, R1, R0 | Selects output configuration in conjunction with RSET              |   |   |    |    |   |
|                | RSET   | R3  | R2  | R1 | R0 | Output Configuration                                  |
|                | 0  | 0   | 0   | 0  | 0  | 4 mA to 21 mA (external 15 kΩ current sense resistor) |
|                | 0  | 0   | 0   | 0  | 1  | 0 mA to 21 mA (external 15 kΩ current sense resistor) |
|                | 0  | 0   | 0   | 1  | 0  | N/A   |
|                | 0  | 0   | 0   | 1  | 1  | N/A   |
|                | 0  | 0   | 1   | 0  | 0  | N/A   |
|                | 0  | 0   | 1   | 0  | 1  | 0 V to 5 V  |
|                | 0  | 0   | 1   | 1  | 0  | N/A   |
|                | 0  | 0   | 1   | 1  | 1  | N/A   |
|                | 0  | 1   | 0   | 0  | 0  | N/A   |
|                | 0  | 1   | 0   | 0  | 1  | N/A   |
|                | 0  | 1   | 0   | 1  | 0  | 0 V to 10.5 V   |
|                | 0  | 1   | 0   | 1  | 1  | N/A   |
|                | 0  | 1   | 1   | 0  | 0  | ±10.5 V   |
|                | 0  | 1   | 1   | 0  | 1  | N/A   |
|                | 0  | 1   | 1   | 1  | 0  | N/A   |
|                | 0  | 1   | 1   | 1  | 1  | N/A   |
|                | 1  | 0   | 0   | 0  | 0  | 4 mA to 21 mA (internal current sense resistor)       |
|                | 1  | 0   | 0   | 0  | 1  | 0 mA to 21 mA (internal current sense resistor)       |
|                | 1  | 0   | 0   | 1  | 0  | N/A   |
|                | 1  | 0   | 0   | 1  | 1  | N/A   |
|                | 1  | 0   | 1   | 0  | 0  | N/A   |
|                | 1  | 0   | 1   | 0  | 1  | 0 V to 5 V  |
|                | 1  | 0   | 1   | 1  | 0  | N/A   |
|                | 1  | 0   | 1   | 1  | 1  | N/A   |
|                | 1  | 1   | 0   | 0  | 0  | N/A   |
|                | 1  | 1   | 0   | 0  | 1  | N/A   |
|                | 1  | 1   | 0   | 1  | 0  | 0 V to 10.5 V   |
|                | 1  | 1   | 0   | 1  | 1  | N/A   |
|                | 1  | 1   | 1   | 0  | 0  | ±10.5 V   |
|                | 1  | 1   | 1   | 0  | 1  | N/A   |
|                | 1  | 1   | 1   | 1  | 0  | N/A   |
|                | 1  | 1   | 1   | 1  | 1  | N/A   |
|                | CLRSEL   | Sets clear mode to zero scale or midscale. See the Asynchronous Clear (CLEAR) section |   |    |    |   |
|                | CLRSEL   |   | Function  |    |    |   |
|                | 0  |   | Clear to 0 V  |    |    |   |
|                | 1  |   | Clear to midscale in unipolar mode; clear to zero scale in bipolar mode             |    |    |   |
| OUTEN          | Output enable bit. This bit must be set to 1 to enable the outputs |   |   |    |    |   |
| Clear          | Software clear bit, active high                                    |   |   |    |    |   |
| RSET           | Select internal/external current sense resistor                    |   |   |    |    |   |
|                | RSET   |   | Function  |    |    |   |
|                | 1  |   | Select internal current sense resistor; used with the R3 to R0 bits to select range |    |    |   |
|                | 0  |   | Select external current sense resistor; used with the R3 to R0 bits to select range |    |    |   |
| Reset          | Resets the part to its power-on state                              |   |   |    |    |   |

### Readback Operation

Readback mode is activated by selecting the correct device address (A2, A1, A0) and then setting the R/W bit to 1. By default, the SDO pin is disabled. After having addressed the [AD5748](#) for a read operation, setting R/W to 1 enables the SDO pin and SDO data is clocked out on the 5<sup>th</sup> rising edge of SCLK. After the data has been clocked out on SDO, a rising edge on  $\overline{\text{SYNC}}$  disables (tristate) the SDO pin again. Status register data (see Table 8) and control register data are both available during the same read cycle.

The status bits comprise four read-only bits. They are used to notify the user of specific fault conditions that occur, such as an open circuit or short circuit on the output, overtemperature error, or an interface error. If any of these fault conditions occurs, a hardware FAULT is also asserted low, which can be used as a hardware interrupt to the controller.

See the Detailed Description of Features section for a full explanation of fault conditions.

### HARDWARE CONTROL

Hardware control is enabled by connecting the HW SELECT pin to DVCC. In this mode, the R3, R2, R1, and R0 pins in conjunction with the RSET pin are used to configure the output range, as per Table 7.

In hardware mode, there is no status register. The fault conditions (open circuit, short circuit, and overtemperature) are available on Pin IFAULT, Pin VFAULT, and Pin TEMP. If any one of these fault conditions is set, then a low is asserted on the specific fault pin. IFAULT, VFAULT, and TEMP are open-drain outputs and, therefore, can be connected together to allow the user to generate one interrupt to the system controller to communicate a fault. If hardwired in this way, it is not possible to isolate which fault occurred in the system.

### TRANSFER FUNCTION

The [AD5748](#) consists of an internal signal conditioning block that maps the analog input voltage to a programmed output range. The available analog input range is 0 V to 4.096 V.

For all ranges, both current and voltage, the [AD5748](#) implements a straight linear mapping function. 0 V maps to the lower end of the selected range; 4.096 V maps to the upper end of the selected range.

**Table 8. Input Shift Register Contents for a Read Operation—Status Register**

| MSB |     |     |     |     |     |    |    |    |        |       |      |           |           | LSB        |            |
|-----|-----|-----|-----|-----|-----|----|----|----|--------|-------|------|-----------|-----------|------------|------------|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6     | D5    | D4   | D3        | D2        | D1         | D0         |
| A2  | A1  | A0  | 1   | 0   | R3  | R2 | R1 | R0 | CLRSEL | OUTEN | RSET | PEC error | OVER TEMP | IOUT fault | VOUT fault |

**Table 9. Status Bit Options**

| Bit        | Description  |
|------------|--|
| PEC Error  | This bit is set if there is an interface error detected by CRC-8 error checking. See the Detailed Description of Features section. |
| VOUT Fault | This bit is set if there is a short circuit on the VOUT pin.   |
| IOUT Fault | This bit is set if there is an open circuit on the IOUT pin.   |
| OVER TEMP  | This bit is set if the <a href="#">AD5748</a> core temperature exceeds approximately 150°C.  |

## DETAILED DESCRIPTION OF FEATURES

### OUTPUT FAULT ALERT—SOFTWARE MODE

In software mode, the AD5748 is equipped with one FAULT pin; this is an open-drain output allowing several AD5748 devices to be connected together to one pull-up resistor for global fault detection. In software mode, the FAULT pin is forced active low by any one of the following fault scenarios:

- The voltage at IOUT attempts to rise above the compliance range, due to an open-loop circuit or insufficient power supply voltage. The internal circuitry that develops the fault output avoids using a comparator with window limits because this requires an actual output error before the fault output becomes active. Instead, the signal is generated when the internal amplifier in the output stage has less than approximately 1 V of remaining drive capability. Thus, the fault output activates slightly before the compliance limit is reached. Because the comparison is made within the feedback loop of the output amplifier, the output accuracy is maintained by its open-loop gain, and an output error does not occur before the fault output becomes active.
- A short is detected on the voltage output pin (VOUT). The short-circuit current is limited to 15 mA.
- An interface error is detected due to a packet error checking (PEC) failure. See the Packet Error Checking section.
- If the core temperature of the AD5748 exceeds approximately 150°C.

### OUTPUT FAULT ALERT—HARDWARE MODE

In hardware mode, the AD5748 is equipped with three fault pins: VFAULT, IFAULT, and TEMP. These are open-drain outputs allowing several AD5748 devices to be connected together to one pull-up resistor for global fault detection. In hardware control mode, these fault pins are forced active by any one of the following fault scenarios:

- Open-circuit detect. The voltage at IOUT attempts to rise above the compliance range, due to an open-loop circuit or insufficient power supply voltage. The internal circuitry that develops the fault output avoids using a comparator with window limits because this requires an actual output error before the fault output becomes active. Instead, the signal is generated when the internal amplifier in the

output stage has less than approximately 1 V of remaining drive capability. Thus, the fault output activates slightly before the compliance limit is reached. Because the comparison is made within the feedback loop of the output amplifier, the output accuracy is maintained by its open-loop gain, and an output error does not occur before the fault output becomes active. If this fault is detected, the IFAULT pin is forced low.

- A short is detected on the voltage output pin (VOUT). The short-circuit current is limited to 15 mA. If this fault is detected, the VFAULT pin is forced low.
- If the core temperature of the AD5748 exceeds approximately 150°C. If this fault is detected, the TEMP pin is forced low.

### VOLTAGE OUTPUT SHORT-CIRCUIT PROTECTION

Under normal operation, the voltage output sinks and sources up to 12 mA and maintains the specified operation. The maximum current that the voltage output delivers is 15 mA; this is the short-circuit current.

### ASYNCHRONOUS CLEAR (CLEAR)

CLEAR is an active high clear that allows the output to be cleared to either zero-scale code or midscale code and is user-selectable via the CLRSEL pin or the CLRSEL bit of the input shift register, as described in Table 7. (The clear select feature is a logical OR function of the CLRSEL pin and the CLRSEL bit.) The current loop output clears to the bottom of its programmed range. When the CLEAR signal is returned low, the output returns to its programmed value or a new value if programmed. A clear operation can also be performed via the clear command in the control register.

Table 10. CLRSEL Options

| CLRSEL | Output Clear Value            |  |
|--------|-------------------------------|--|
|        | Unipolar Output Voltage Range | Unipolar Current Output Range  |
| 0      | 0 V                           | Zero scale; for example:<br>4 mA on the 4 mA to 21 mA range<br>0 mA on the 0 mA to 21 mA range     |
| 1      | Midscale                      | Midscale; for example:<br>12.5 mA on the 4 mA to 21 mA range<br>10.5 mA on the 0 mA to 21 mA range |

## CURRENT SETTING RESISTOR

Referring to Figure 1,  $R_{SET}$  is an internal sense resistor as part of the voltage-to-current conversion circuitry. The nominal value of the internal current sense resistor is 15 k $\Omega$ . To allow for over-range capability in current mode, the user can also select the internal current sense resistor to be 14.7 k $\Omega$ , giving a nominal 2% overrange capability. This feature is available in the 0 mA to 21 mA and 4 mA to 21 mA current ranges.

The stability of the output current value over temperature is dependent on the stability of the value of  $R_{SET}$ . As a method of improving the stability of the output current over temperature, an external low drift resistor can be connected to the REXT1 and REXT2 pins of the AD5748, which can be used instead of the internal resistor. The external resistor is selected via the input shift register. If the external resistor option is not used, the REXT1 and REXT2 pins should be left floating.

## PACKET ERROR CHECKING

To verify that data has been received correctly in noisy environments, the AD5748 offers the option of error checking based on an 8-bit (CRC-8) cyclic redundancy check. The device controlling the AD5748 should generate an 8-bit frame check sequence using the following polynomial:

$$C(x) = x_8 + x_2 + x_1 + 1$$

This is added to the end of the data-word, and 24 data bits are sent to the AD5748 before taking SYNC high. If the AD5748 receives a 24-bit data frame, it performs the error check when SYNC goes high. If the check is valid, then the data is written to the selected register. If the error check fails, the FAULT pin goes low and Bit D3 of the status register is set. After reading this register, this error flag is cleared automatically and the FAULT pin goes high again.

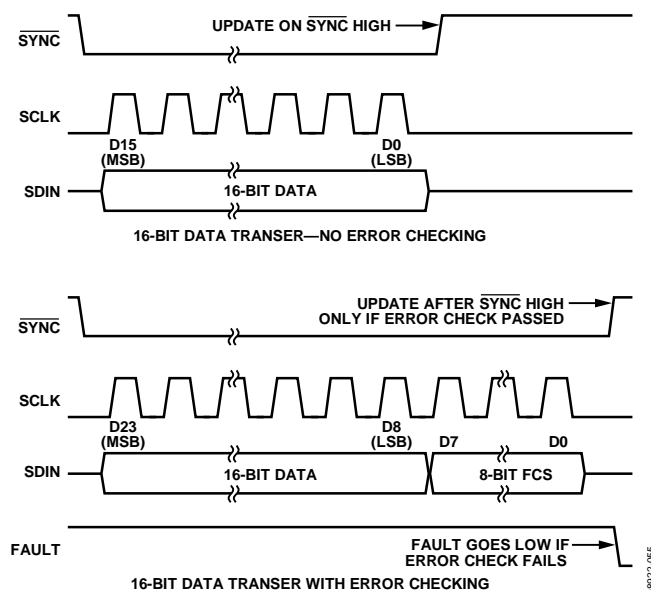


Figure 53. PEC Error Checking Timing

## APPLICATIONS INFORMATION

### TRANSIENT VOLTAGE PROTECTION

The AD5748 contains ESD protection diodes that prevent damage from normal handling. The industrial control environment can, however, subject I/O circuits to much higher transients. To protect the AD5748 from excessively high voltage transients, external power diodes and a surge current limiting resistor may be required, as shown in Figure 54. The constraint on the resistor value is that, during normal operation, the output level at IOOUT must remain within its voltage compliance limit of  $AV_{DD} - 2.75\text{ V}$ , and the two protection diodes and resistor must have appropriate power ratings. Further protection can be added with transient voltage suppressors if needed.




Figure 54. Output Transient Voltage Protection

### THERMAL CONSIDERATIONS

It is important to understand the effects of power dissipation on the package and on junction temperature. The internal junction temperature should not exceed  $125^{\circ}\text{C}$ . The AD5748 is packaged in a 32-lead LFCSP 5, 5 mm  $\times$  5 mm package. The thermal impedance,  $\theta_{JA}$ , is  $42^{\circ}\text{C/W}$ . It is important that the devices are not operated under conditions that cause the junction temperature to exceed its junction temperature.

Worst-case conditions occur when the AD5748 is operated from the maximum  $AV_{DD}$  (26.4 V) while driving the maximum current (24 mA) directly to ground. The quiescent current of the AD5748 should also be taken into account, nominally  $\sim 4\text{ mA}$ .

The following calculations estimate maximum power dissipation under these worst-case conditions, and determine maximum ambient temperature based on the power dissipation:

$$\text{Power Dissipation} = 26.4\text{ V} \times 28\text{ mA} = 0.7392\text{ W}$$

$$\text{Temp Increase} = 42^{\circ}\text{C} \times 0.7392\text{ W} = 31^{\circ}\text{C}$$

$$\text{Maximum Ambient Temp} = 125^{\circ}\text{C} - 31^{\circ}\text{C} = 94^{\circ}\text{C}$$

These figures assume that proper layout and grounding techniques are followed to minimize power dissipation, as outlined in the Layout Guidelines section.

### LAYOUT GUIDELINES

In any circuit where accuracy is important, careful consideration of the power supply and ground return layout helps to ensure the rated performance. The PCB on which the AD5748 is mounted should be designed so that the AD5748 lies on the analog plane.

The AD5748 should have ample supply bypassing of  $10\text{ }\mu\text{F}$  in parallel with  $0.1\text{ }\mu\text{F}$  on each supply located as close to the package as possible, ideally right up against the device. The  $10\text{ }\mu\text{F}$  capacitors are the tantalum bead type. The  $0.1\text{ }\mu\text{F}$  capacitor should have low effective series resistance (ESR) and low effective series inductance (ESI) such as the common ceramic types, which provide a low impedance path to ground at high frequencies to handle transient currents due to internal logic switching.

In systems where there are many devices on one board, it is often useful to provide some heat sinking capability to allow the power to dissipate easily.

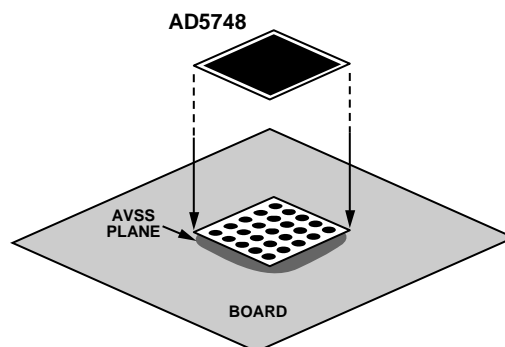



Figure 55. Paddle Connection to Board

The AD5748 has an exposed paddle beneath the device. This paddle is connected to the AVSS supply for the part. For optimum performance, special considerations should be used to design the motherboard and to mount the package. For enhanced thermal, electrical, and board level performance, the exposed paddle on the bottom of the package is soldered to the corresponding thermal land paddle on the PCB. Thermal vias are designed into the PCB land paddle area to further improve heat dissipation.

The AVSS plane on the device can be increased (as shown in Figure 55) to provide a natural heat sinking effect.

## GALVANICALLY ISOLATED INTERFACE

In many process control applications, it is necessary to provide an isolation barrier between the controller and the unit being controlled to protect and isolate the controlling circuitry from any hazardous common-mode voltages that may occur. The *iCoupler*® family of products from Analog Devices, Inc., provides voltage isolation in excess of 5.0 kV. The serial loading structure of the AD5748 makes it ideal for isolated interfaces because the number of interface lines is kept to a minimum. Figure 56 shows a 4-channel isolated interface using an ADuM1400. For further information, visit [www.analog.com/icouplers](http://www.analog.com/icouplers).

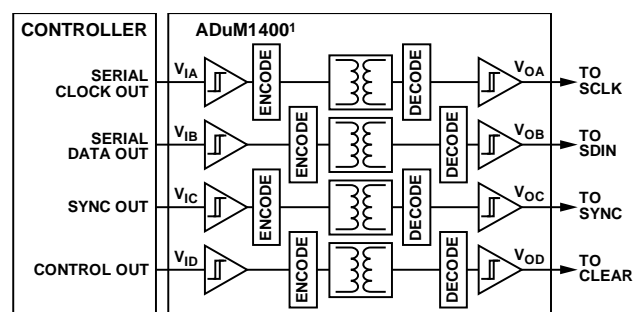


<sup>1</sup>ADDITIONAL PINS OMITTED FOR CLARITY.

Figure 56. Isolated Interface

## MICROPROCESSOR INTERFACING

Microprocessor interfacing to the AD5748 is via a serial bus that uses a protocol compatible with microcontrollers and DSP processors. The communications channel is a 3-wire (minimum) interface consisting of a clock signal, a data signal, and a SYNC signal. The AD5748 requires a 16-bit data-word with data valid on the falling edge of SCLK.

## OUTLINE DIMENSIONS

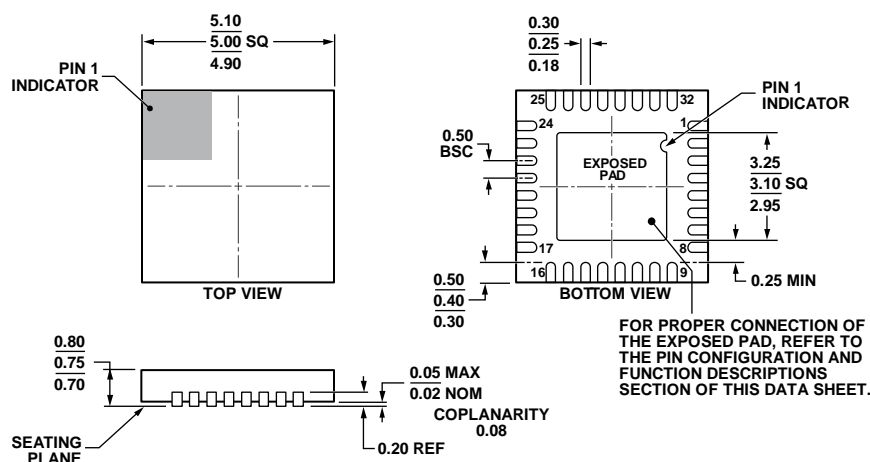

112408-A

## ORDERING GUIDE

| Model <sup>1</sup> | TUE Accuracy                              | Analog Input Range | External Reference | Temperature Range | Package Description | Package Option |
|--------------------|---|--------------------|--------------------|-------------------|---------------------|----------------|
| AD5748ACPZ         | $\pm 0.3\% V_{OUT}$ , $\pm 0.5\% I_{OUT}$ | 0 V to 4.096 V     | 4.096 V            | -40°C to +105°C   | 32-Lead LFCSP_WQ    | CP-32-7        |
| AD5748ACPZ-RL7     | $\pm 0.3\% V_{OUT}$ , $\pm 0.5\% I_{OUT}$ | 0 V to 4.096 V     | 4.096 V            | -40°C to +105°C   | 32-Lead LFCSP_WQ    | CP-32-7        |

<sup>1</sup> Z = RoHS Compliant Part.