


Ultra High Speed Switching Applications

1SS309

■ Features

- Low forward voltage: $V_F(3) = 0.90V$ (typ.)
- Fast reverse recovery time: $t_{rr} = 1.6ns$ (typ.)
- Small total Capacitance: $C_T = 0.9pF$ (typ.)

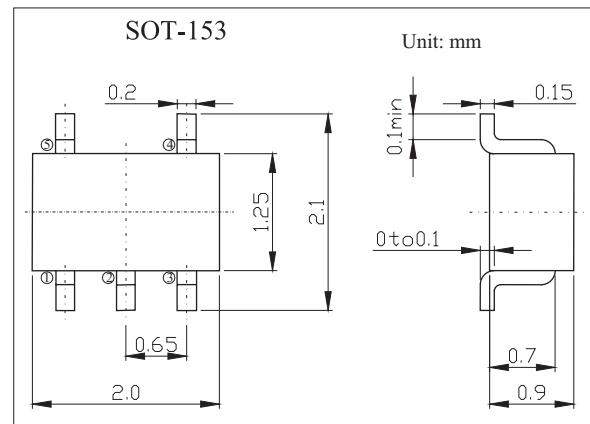

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Maximum (peak) reverse voltage	V_{RM}	85	V
Reverse voltage	V_R	80	V
Maximum (peak) forward current	I_{FM}	300 ⁽¹⁾	mA
Average forward current	I_o	100 ⁽¹⁾	mA
Surge current (10 ms)	I_{FSM}	2 ⁽¹⁾	A
Power dissipation	P	200	mW
Junction temperature	T_j	125	°C
Storage temperature range	T_{stg}	-55 to +125	°C

Note

1. Unit Rating. Total Rating = Unit Rating $\times 1.5$

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	$V_F(1)$	$I_F = 1 \text{ mA}$		0.60		V
	$V_F(2)$	$I_F = 10 \text{ mA}$		0.72		
	$V_F(3)$	$I_F = 100 \text{ mA}$		0.92	1.20	
Reverse current	$I_R(1)$	$V_R = 30 \text{ V}$			0.1	$\mu \text{ A}$
	$I_R(2)$	$V_R = 80 \text{ V}$			0.5	
Total capacitance	C_T	$V_R=0 \text{ V}, f=1 \text{ MHz}$		0.9	3.0	pF
Reverse recovery time	t_{rr}	$I_F = 10 \text{ mA}$		1.6	4.0	ns

■ Marking

Marking	A2
---------	----