

Silicon NPN Power Transistors

2SD2498

DESCRIPTION


- With TO-3P(H)IS package
- High speed
- High voltage
- Low saturation voltage

APPLICATIONS

- Horizontal deflection output for high resolution display, color TV
- High speed switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

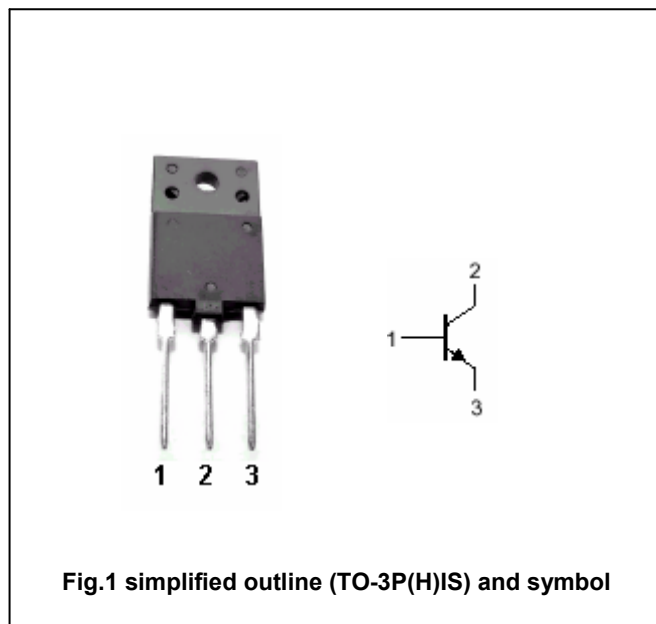Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	1500	V
V_{CEO}	Collector-emitter voltage	Open base	600	V
V_{EBO}	Emitter-base voltage	Open collector	5	V
I_C	Collector current		6	A
I_{CM}	Collector current-peak		12	A
I_B	Base current		3	A
P_C	Total power dissipation	$T_C=25^\circ\text{C}$	50	W
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon NPN Power Transistors

2SD2498

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=10mA$; $I_B=0$	600			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=4A$; $I_B=0.8A$			5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=4A$; $I_B=0.8A$		0.9	1.2	V
I_{CBO}	Collector cut-off current	$V_{CB}=1500V$; $I_E=0$			1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=5V$; $I_C=0$			10	μA
h_{FE-1}	DC current gain	$I_C=1A$; $V_{CE}=5V$	10		30	
h_{FE-2}	DC current gain	$I_C=4A$; $V_{CE}=5V$	5		9	
C_{ob}	Collector output capacitance	$I_E=0$; $V_{CB}=10V$, $f=1MHz$		95		pF
f_T	Transition frequency	$I_C=0.1A$; $V_{CE}=10V$		2		MHz

Switching times :

t_s	Storage time	$I_{CP}=4A$; $I_{B1}=0.8A$ $f_H=15.75kHz$		7	10	μs
t_f	Fall time			0.4	0.7	μs

2SD2498

Silicon NPN Power Transistors

2SD2498

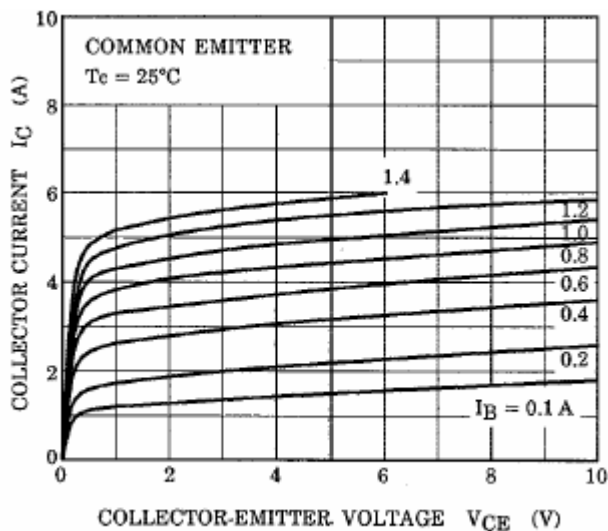


Fig.3 Static Characteristic

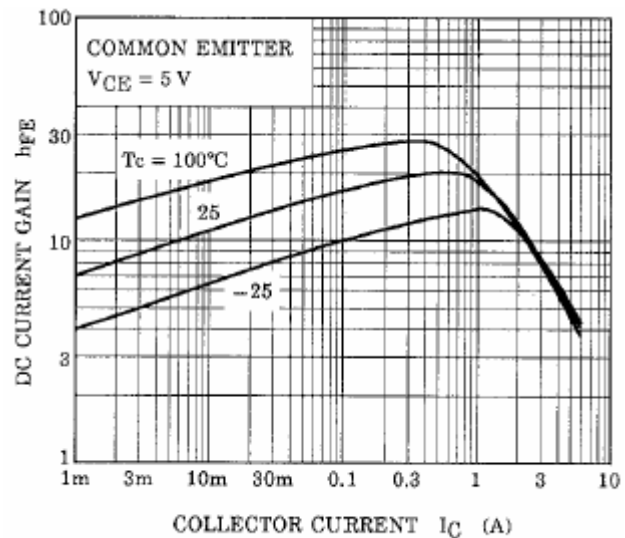


Fig.4 DC current Gain

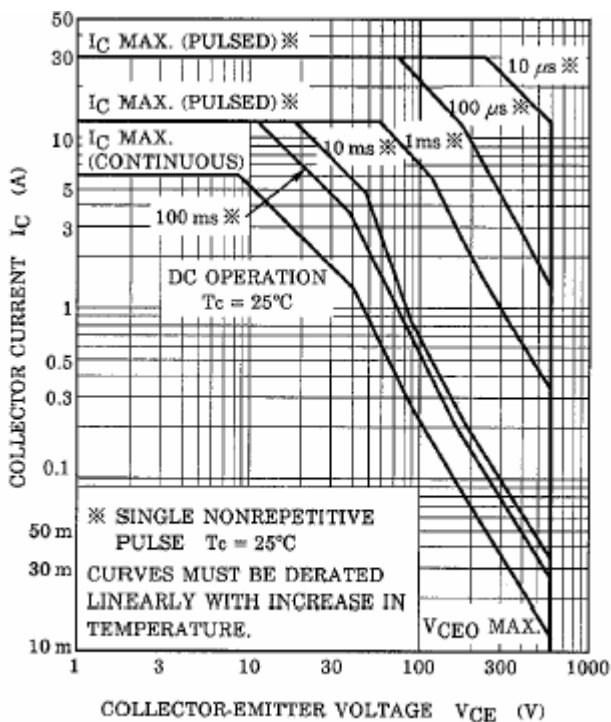


Fig.5 Safe Operating Area