

# ADM7001/X

Single Ethernet 10/100M PHY

Communications



N e v e r   s t o p   t h i n k i n g .

**Edition 2005-11-25**

**Published by Infineon Technologies AG,  
St.-Martin-Strasse 53,  
81669 München, Germany**

**© Infineon Technologies AG 2005.  
All Rights Reserved.**

**Attention please!**

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

**Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

**Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

---

## Single Ethernet 10/100M PHY

**Revision History: 2005-11-25, Rev. 1.07**

---

### Previous Version:

| Page/Date  | Subjects (major changes since last revision)                                                                                                                      |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2003-03-05 | Rev. 1.0: First release of ADM7001                                                                                                                                |
| 2003-04-08 | Rev. 1.01: Register Modifications and Pin updates                                                                                                                 |
| 2003-07-24 | Rev. 1.02: The following sections were updated: 1.2, 1.3, 2.1, 2.2.1, 2.2.5, 2.2.7, 2.2.8, 2.2.8, 4.1, 4.2.3-4, 4.2.11-12, 4.3.4, 4.3.9, 4.3.11, 4.3.12, & 4.3.16 |
| 2003-07-30 | Rev. 1.03: Updated section 6.2                                                                                                                                    |
| 2003-09-15 | Rev. 1.04: Updated Section 2.2.5, 2.2.8, & 4.2.11                                                                                                                 |
| 2004-02-19 | Rev. 1.05: Updated table 5.3                                                                                                                                      |
| 2004-04-16 | Rev. 1.06: Removed TQFP packaging                                                                                                                                 |
| 2005-09-12 | Rev. 1.07 when changed to the new Infineon format                                                                                                                 |
| 2005-11-25 | Minor change. Included Green package information                                                                                                                  |

### Trademarks

ABM®, ACE®, AOP®, ARCOFI®, ASM®, ASP®, DigiTape®, DuSLIC®, EPIC®, ELIC®, FALC®, GEMINAX®, IDEC®, INCA®, IOM®, IPAT®-2, ISAC®, ITAC®, IWE®, IWORX®, MUSAC®, MuSLIC®, OCTAT®, OptiPort®, POTSWIRE®, QUAT®, QuadFALC®, SCOUT®, SICAT®, SICOFI®, SIDEC®, SLICOFI®, SMINT®, SOCRATES®, VINETIC®, 10BaseV®, 10BaseVX® are registered trademarks of Infineon Technologies AG. 10BaseS™, EasyPort™, VDSLite™ are trademarks of Infineon Technologies AG. Microsoft® is a registered trademark of Microsoft Corporation, Linux® of Linus Torvalds, Visio® of Visio Corporation, and FrameMaker® of Adobe Systems Incorporated.

## Table of Contents

|          |                                            |    |
|----------|--------------------------------------------|----|
|          | <b>Table of Contents</b>                   | 4  |
|          | <b>List of Figures</b>                     | 6  |
|          | <b>List of Tables</b>                      | 7  |
| <b>1</b> | <b>Product Overview</b>                    | 8  |
| 1.1      | Overview                                   | 8  |
| 1.1.1    | Package Information                        | 8  |
| 1.2      | Features                                   | 8  |
| 1.3      | Block Diagram                              | 10 |
| <b>2</b> | <b>Interface Description</b>               | 11 |
| 2.1      | Pin Diagram                                | 11 |
| 2.2      | Pin Description                            | 11 |
| 2.2.1    | Twisted Pair Interface, 5 Pins             | 13 |
| 2.2.2    | Digital Ground/Power, 7 Pins               | 14 |
| 2.2.3    | Ground and Power, 5 Pins                   | 15 |
| 2.2.4    | Clock Input, 2 Pins                        | 16 |
| 2.2.5    | MII/RMII/GPSI Interface, 16 pins           | 16 |
| 2.2.6    | Reset Pin                                  | 22 |
| 2.2.7    | Clock Signals, 6 Pins                      | 22 |
| 2.2.8    | LED Interface, 4 Pins                      | 24 |
| 2.2.9    | Regulator Control                          | 25 |
| <b>3</b> | <b>Function Description</b>                | 26 |
| 3.1      | 10/100M PHY Block                          | 26 |
| 3.1.1    | 100Base-X Module                           | 26 |
| 3.1.2    | 100Base-TX Receiver                        | 26 |
| 3.1.3    | 100Base-TX Transmitter                     | 30 |
| 3.1.4    | 100Base-FX Receiver                        | 30 |
| 3.1.5    | 100Base-FX Transmitter                     | 31 |
| 3.1.6    | 10Base-T Module                            | 31 |
| 3.1.7    | Operation Modes                            | 31 |
| 3.1.8    | Manchester Encoder/Decoder                 | 31 |
| 3.1.9    | Transmit Driver and Receiver               | 31 |
| 3.1.10   | Smart Squelch                              | 31 |
| 3.1.11   | Carrier Sense                              | 32 |
| 3.1.12   | Collision Detection                        | 32 |
| 3.1.13   | Jabber Function                            | 33 |
| 3.1.14   | Link Test Function                         | 33 |
| 3.1.15   | Automatic Link Polarity Detection          | 33 |
| 3.1.16   | Clock Synthesizer                          | 33 |
| 3.1.17   | Auto Negotiation                           | 33 |
| 3.1.18   | Auto Negotiation and Speed Configuration   | 34 |
| 3.2      | MAC Interface                              | 34 |
| 3.2.1    | Reduced Media Independent Interface (RMII) | 34 |
| 3.2.2    | Receive Path for 100M                      | 35 |
| 3.2.3    | Receive Path for 10M                       | 36 |
| 3.2.4    | Transmit Path for 100M                     | 36 |
| 3.2.5    | Transmit Path for 10M                      | 38 |
| 3.2.6    | Media Independent Interface (MII)          | 38 |

**Table of Contents**

|          |                                                   |           |
|----------|---------------------------------------------------|-----------|
| 3.2.7    | Receive Path for MII                              | 39        |
| 3.2.8    | Transmit Path for MII                             | 41        |
| 3.2.9    | General Purpose Serial Interface (GPSI)           | 41        |
| 3.2.10   | Receive Path for GPSI                             | 42        |
| 3.2.11   | Transmit Path for GPSI                            | 42        |
| 3.3      | LED Display                                       | 43        |
| 3.4      | Management Register Access                        | 44        |
| 3.4.1    | Preamble Suppression                              | 44        |
| 3.4.2    | Reset Operation                                   | 44        |
| 3.5      | Power Management                                  | 45        |
| 3.6      | Voltage Regulator                                 | 46        |
| <b>4</b> | <b>Registers Description</b>                      | <b>48</b> |
| 4.1      | Register Description                              | 49        |
| <b>5</b> | <b>Electrical Characteristics</b>                 | <b>74</b> |
| 5.1      | DC Characterization                               | 74        |
| 5.1.1    | Absolute Maximum Rating                           | 74        |
| 5.1.2    | Recommended Operating Conditions                  | 74        |
| 5.1.2.1  | DC Characteristics for 2.5 V Operation            | 74        |
| 5.2      | AC Characteristics                                | 75        |
| 5.2.1    | XI/OSCI (Crystal/Oscillator) Timing (In MII Mode) | 75        |
| 5.3      | RMII Timing                                       | 76        |
| 5.3.1    | REFCLK Input Timing (XI in RMII Mode)             | 76        |
| 5.3.2    | REFCLK Output Timing (CLKO50 in RMII Mode)        | 77        |
| 5.3.3    | RMII Transmit Timing                              | 77        |
| 5.3.4    | RMII Receive Timing                               | 78        |
| 5.4      | MII Timing                                        | 79        |
| 5.4.1    | RXCLK Clock Timing                                | 79        |
| 5.4.2    | MII Receive Timing                                | 81        |
| 5.4.3    | TXCLK Output Timing                               | 82        |
| 5.4.4    | MII Transmit Timing                               | 82        |
| 5.5      | GPSI Timing                                       | 83        |
| 5.5.1    | GPSI Receive Timing                               | 83        |
| 5.5.2    | GPSI Transmit Timing                              | 84        |
| 5.6      | Serial Management Interface (MDC/MDIO) Timing     | 85        |
| 5.7      | Power On Configuration Timing                     | 86        |
| <b>6</b> | <b>Packaging</b>                                  | <b>87</b> |

## List of Figures

|           |                                                 |    |
|-----------|-------------------------------------------------|----|
| Figure 1  | ADM7001/X Block Diagram                         | 10 |
| Figure 2  | Pin Diagram                                     | 11 |
| Figure 3  | 100Base-X Block Diagram and Data Path           | 27 |
| Figure 4  | 10Base-T Block Diagram and Data Path            | 32 |
| Figure 5  | RMII Signal Diagram                             | 35 |
| Figure 6  | RMII Reception Without Error                    | 35 |
| Figure 7  | RMII Reception with False Carrier (100M Only)   | 36 |
| Figure 8  | RMII Reception with Symbol Error                | 36 |
| Figure 9  | 10M RMII Receive Diagram                        | 36 |
| Figure 10 | 100M RMII Transmit Diagram                      | 37 |
| Figure 11 | 10M RMII Transmit Diagram                       | 38 |
| Figure 12 | MII Signal Diagram                              | 39 |
| Figure 13 | MII Receive Without Error                       | 39 |
| Figure 14 | MII Receive With False Carrier                  | 40 |
| Figure 15 | MII Receive With Symbol Error(100M Only)        | 40 |
| Figure 16 | MII Transmission                                | 41 |
| Figure 17 | MII Transmit with Collision (Half Duplex Only)  | 41 |
| Figure 18 | GPSSI Signal Diagram                            | 42 |
| Figure 19 | GPSSI Receive Diagram                           | 42 |
| Figure 20 | GPSSI Transmit Diagram                          | 43 |
| Figure 21 | SMII Read Operation                             | 44 |
| Figure 22 | SMII Write Operation                            | 45 |
| Figure 23 | Medium Detect Power Management Flow Chart       | 46 |
| Figure 24 | Power and Ground Filtering                      | 47 |
| Figure 25 | Crystal/Oscillator Timing                       | 75 |
| Figure 26 | REFCLK Input Timing                             | 76 |
| Figure 27 | REFCLK Output Timing                            | 77 |
| Figure 28 | RMII Transmit Timing                            | 78 |
| Figure 29 | RMII Receive Timing                             | 78 |
| Figure 30 | RXCLK Output Timing                             | 79 |
| Figure 31 | MII Receive Timing                              | 81 |
| Figure 32 | TXCLK Output Timing                             | 82 |
| Figure 33 | MII Transmit Timing                             | 83 |
| Figure 34 | GPSSI Receive Timing                            | 84 |
| Figure 35 | GPSSI Transmit Timing                           | 84 |
| Figure 36 | Serial Management Interface (MDC/MDIO) Timing   | 85 |
| Figure 37 | Power On Configuration Timing                   | 86 |
| Figure 38 | ADM7001/X, Low Profile Quad Flat Package (LQFP) | 87 |

## List of Tables

|          |                                                          |    |
|----------|----------------------------------------------------------|----|
| Table 1  | Abbreviations for Pin Type                               | 12 |
| Table 2  | Abbreviations for Buffer Type                            | 12 |
| Table 3  | Twisted Pair Interface, 5 Pins                           | 13 |
| Table 4  | Digital Ground/Power, 7 Pins                             | 14 |
| Table 5  | Ground and Power, 5 Pins                                 | 15 |
| Table 6  | Clock Input, 2 Pins                                      | 16 |
| Table 7  | MII/RMII/GPSI Interface, 16 pins                         | 16 |
| Table 8  | Reset Pin                                                | 22 |
| Table 9  | Clock Signals, 6 pins                                    | 22 |
| Table 10 | LED Interface, 4 Pins                                    | 24 |
| Table 11 | Regulator Control                                        | 25 |
| Table 12 | Look-up Table for Translating 5B Symbols into 4B Nibbles | 28 |
| Table 13 | Channel Configuration                                    | 38 |
| Table 14 | Speed LED Display                                        | 43 |
| Table 15 | Duplex LED Display                                       | 43 |
| Table 16 | Activity/Link LED Display                                | 43 |
| Table 17 | Cable Distance LED Display                               | 44 |
| Table 18 | Registers Address Space                                  | 48 |
| Table 19 | Registers Overview                                       | 48 |
| Table 20 | Registers Access Types                                   | 48 |
| Table 21 | Registers Clock Domains                                  | 49 |
| Table 22 | Reserved Registers                                       | 59 |
| Table 23 | Absolute Maximum Rating                                  | 74 |
| Table 24 | Recommended Operating Conditions                         | 74 |
| Table 25 | DC Characteristics for 2.5 V Operation                   | 74 |
| Table 26 | Crystal/Oscillator Timing                                | 75 |
| Table 27 | REFCLK Input Timing                                      | 76 |
| Table 28 | REFCLK Output Timing                                     | 77 |
| Table 29 | RMII Transmit Timing                                     | 78 |
| Table 30 | RMII Receive Timing                                      | 79 |
| Table 31 | REFCLK Input Timing                                      | 80 |
| Table 32 | MII Receive Timing                                       | 81 |
| Table 33 | TXCLK Output Timing                                      | 82 |
| Table 34 | MII Transmit Timing                                      | 83 |
| Table 35 | GPSI Receive Timing                                      | 84 |
| Table 36 | GPSI Transmit Timing                                     | 85 |
| Table 37 | Serial Management Interface (MDC/MDIO) Timing            | 85 |
| Table 38 | Power On Configuration Timing                            | 86 |
| Table 39 | Dimensions for 100 Pin LQFP Package                      | 88 |

# 1 Product Overview

Features and Block Diagram.

## 1.1 Overview

The ADM7001/X is a single chip one port 10/100M PHY, which is designed for today's low cost and low power dual speed application. The ADM7001X is the environmentally friendly "green" package version.

It supports auto sensing 10/100 Mbps ports with on-chip clock recovery and base line wander correction including integrated MLT-3 functionality for 100 Mbps operation, and also supports Manchester Code Converter with on chip clock recovery circuitry for 10 Mbps functionality. Meanwhile, it provides Medium Independent Interface (MII), Reduced Medium Independent Interface (RMII) and General Purpose Serial Interface (GPSI), three different interfaces in different applications.

For today's IA (Information Application), ADM7001/X supports "Auto Cross Over Detection" function to eliminate the technical barrier between networking and end user. With the aid of this auto cross over detection function, Plug-n-Play feature can be easily applied to IA relative products.

The major design target for ADM7001/X is to reduce the power consumption and system radiation for the whole system. With the aid of this low power consumption and low radiation chip, the fan and on-system power supply can be removed to save the total manufacture cost and make SOHO application achievable.

### 1.1.1 Package Information

| Product Name | Product Type | Package   | Ordering Number          |
|--------------|--------------|-----------|--------------------------|
| ADM7001/X    | ADM7001/X    | LQFP-48-1 | Q67801H 2A <sup>1)</sup> |

1) contact Infineon for the updated ordering information

## 1.2 Features

Main features:

- IEEE 802.3 compatible 10Base-T and 100Base-T physical layer interface and ANSI X3.263 TP-PMD compatible transceiver.
- Single chip, integrated physical layer and transceivers for 10Base-T and 100BASE-TX function.
- Medium Independent Interface (MII), Reduced MII (RMII) and General Purpose Serial Interface (GPSI) for high port count switch.
- Built-in 10 Mbit transmit filter.
- 10 Mbit PLL, exceeding tolerances for both preamble and data jitter.
- 100 Mbit PLL, combined with the digital adaptive equalizer and performance up to 120 meters for UTP 5.
- 125 MHz Clock Generator and Timing Recovery.
- Integrated Base Line Wander Correction.
- Carrier Integrity Monitor function supported.
- Supports FEFI when Auto Negotiation disabled.
- Supports Auto MDIX function for Plug-and-Play
- IEEE 802.3u Clause 28 compliant auto negotiation for full 10 Mbit/s and 100 Mbit/s control.
- Supports programmable LED for different Switch Application and Power On LED Self Test.
- Supports Cable Length Indication both in MII Register and LED (Programmable)
- Supports PECL interface for fiber connection.
- Supports TP vs. FX Medium Converter function.
- Supports Fault Propagation function for medium converter.
- Supports 10K Bytes Jumbo Packet with Clock Skew 150 ppm.

- Built-in Clock Generator and Power On Reset Signal to save system cost.
- 48 LQFP without regulator.
- Supports Power saving function.
- Supports Parallel LED output.

### 1.3 Block Diagram


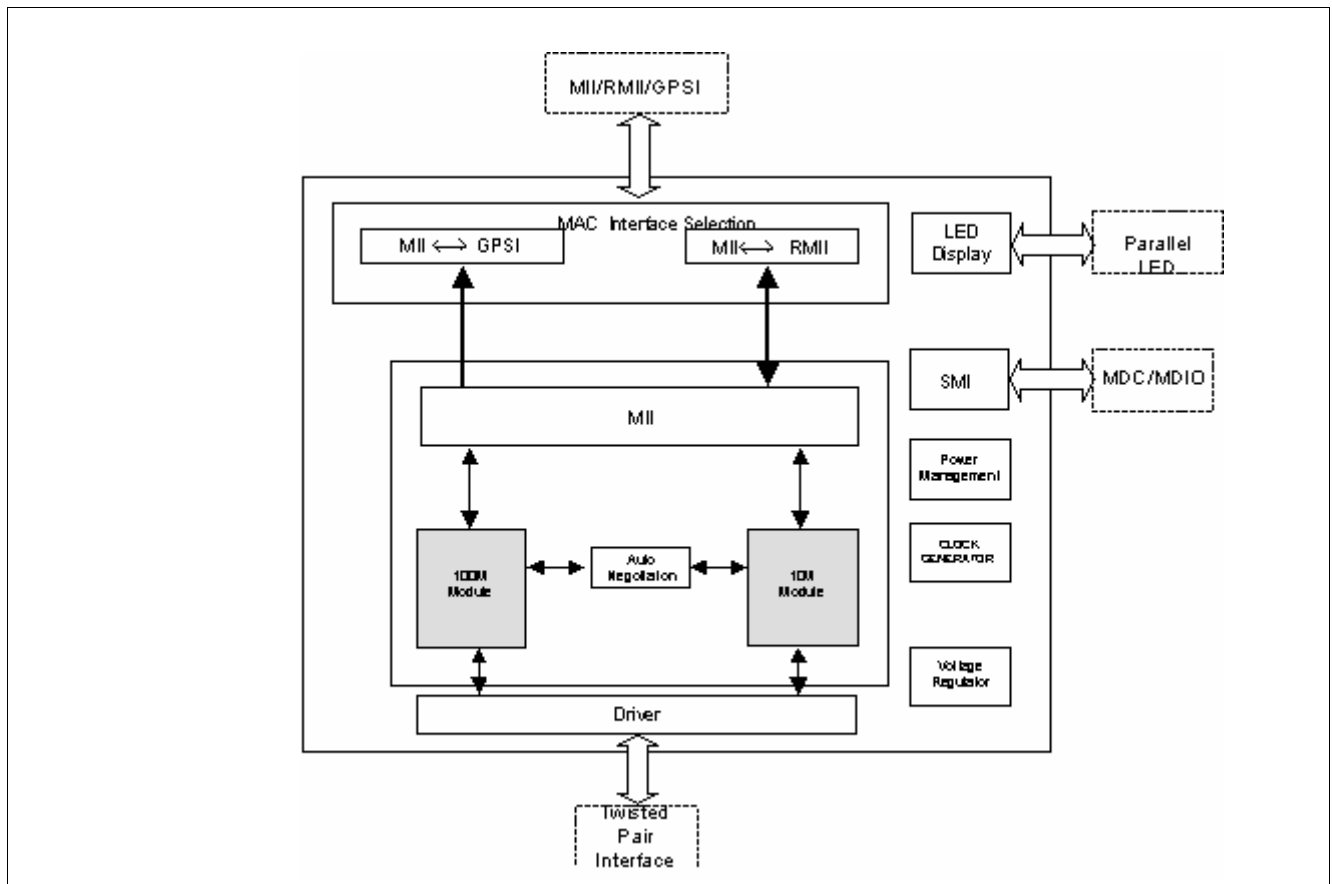


Figure 1 ADM7001/X Block Diagram

## 2 Interface Description

### 2.1 Pin Diagram

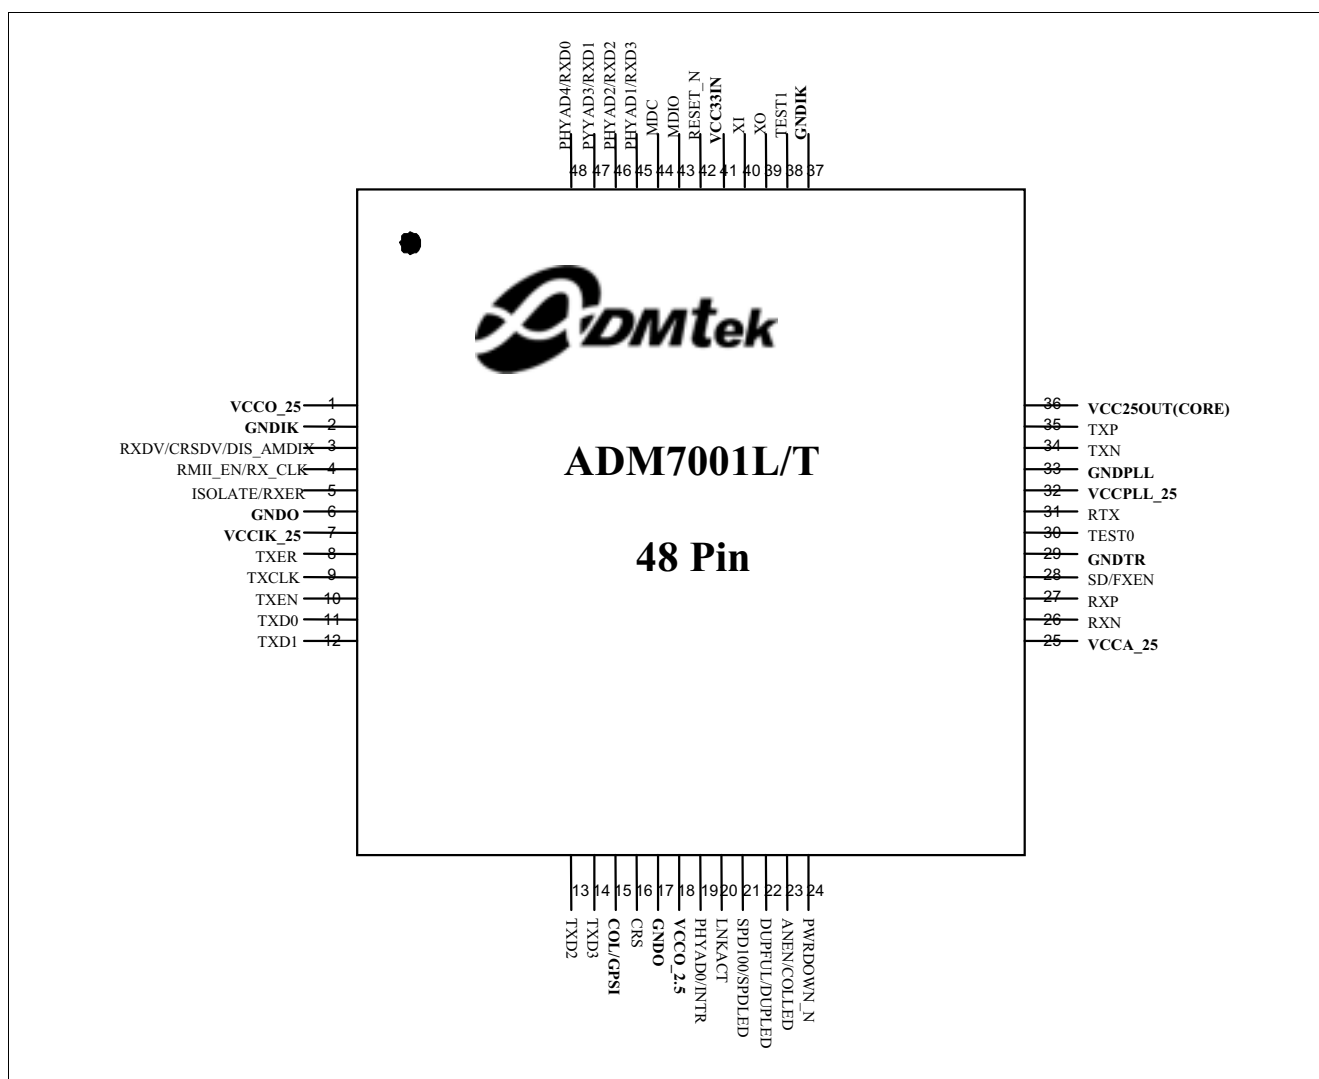

**Figure 2 Pin Diagram**

### 2.2 Pin Description

*Note: For those pins, which have multiple functions, pin name is separated by slash ("/"). If not specified, all signals are default to digital signals. Please refer to [Table 1](#) Pin Type Descriptions' for an explanation of pin abbreviations.*

**Table 1 Abbreviations for Pin Type**

| Abbreviations | Description                                 |
|---------------|---------------------------------------------|
| I             | Standard input-only pin. Digital levels.    |
| O             | Output. Digital levels.                     |
| I/O           | I/O is a bidirectional input/output signal. |
| AI            | Input. Analog levels.                       |
| AO            | Output. Analog levels.                      |
| AI/O          | Input or Output. Analog levels.             |
| PWR           | Power                                       |
| GND           | Ground                                      |
| MCL           | Must be connected to Low (JEDEC Standard)   |
| MCH           | Must be connected to High (JEDEC Standard)  |
| NU            | Not Usable (JEDEC Standard)                 |
| NC            | Not Connected (JEDEC Standard)              |

**Table 2 Abbreviations for Buffer Type**

| Abbreviations | Description                                                                                                                                                                                                                                                                        |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Z             | High impedance                                                                                                                                                                                                                                                                     |
| PU1           | Pull up, 10 k $\Omega$                                                                                                                                                                                                                                                             |
| PD1           | Pull down, 10 k $\Omega$                                                                                                                                                                                                                                                           |
| PD2           | Pull down, 20 k $\Omega$                                                                                                                                                                                                                                                           |
| TS            | Tristate capability: The corresponding pin has 3 operational states: Low, high and high-impedance.                                                                                                                                                                                 |
| OD            | Open Drain. The corresponding pin has 2 operational states, active low and tristate, and allows multiple devices to share as a wire-OR. An external pull-up is required to sustain the inactive state until another agent drives it, and must be provided by the central resource. |
| OC            | Open Collector                                                                                                                                                                                                                                                                     |
| PP            | Push-Pull. The corresponding pin has 2 operational states: Active-low and active-high (identical to output with no type attribute).                                                                                                                                                |
| OD/PP         | Open-Drain or Push-Pull. The corresponding pin can be configured either as an output with the OD attribute or as an output with the PP attribute.                                                                                                                                  |
| ST            | Schmitt-Trigger characteristics                                                                                                                                                                                                                                                    |
| TTL           | TTL characteristics                                                                                                                                                                                                                                                                |

## 2.2.1 Twisted Pair Interface, 5 Pins

**Table 3 Twisted Pair Interface, 5 Pins**

| Pin or Ball No. | Name                     | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                              |
|-----------------|--------------------------|----------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 35              | TXP                      | AI/O     |             | <b>Twisted Pair Transmit Output Positive</b>                                                                                                                                                                                                                          |
| 34              | TXN                      | AI/O     |             | <b>Twisted Pair Transmit Output Negative</b>                                                                                                                                                                                                                          |
| 27              | RXP                      | AI/O     |             | <b>Twisted Pair Receive Input Positive</b>                                                                                                                                                                                                                            |
| 26              | RXN                      | AI/O     |             | <b>Twisted Pair Receive Input Negative</b>                                                                                                                                                                                                                            |
| 28              | Power On Setting<br>FXEN | AI       |             | <b>Fiber Enable</b><br>Value on this pin will be latched by ADM7001/X/X during power on reset as fiber select signal.<br>0 <sub>B</sub> , Twisted Pair Mode<br>1 <sub>B</sub> , Fiber Optic Mode                                                                      |
|                 | Fiber Mode<br>SDP        |          |             | <b>100BASE-FX Signal Detect.</b><br>After power on reset stage, this pin acts as signal detect signal from external fiber optic transceiver in case FXEN is detected as high during power on reset.<br>0 <sub>B</sub> , No signal detected<br>1 <sub>B</sub> , Signal |

## 2.2.2 Digital Ground/Power, 7 Pins

**Table 4 Digital Ground/Power, 7 Pins**

| Pin or Ball No. | Name     | Pin Type | Buffer Type | Function                            |
|-----------------|----------|----------|-------------|-------------------------------------|
| 6, 17           | GNDO     | D,GND    |             | Ground used by 3.3 V I/O.           |
| 2, 37           | GNDIK    | D,GND    |             | Ground used by Core.                |
| 1, 18           | VCCO_25  | D,PWR    |             | 2.5V Power used by Digital I/O Pad. |
| 7               | VCCIK_25 | D,PWR    |             | 2.5 V Power used by Core            |

### 2.2.3 Ground and Power, 5 Pins

**Table 5 Ground and Power, 5 Pins**

| Pin or Ball No. | Name      | Pin Type | Buffer Type | Function                                                                       |
|-----------------|-----------|----------|-------------|--------------------------------------------------------------------------------|
| 41              | VCC3IN    | A,PWR    |             | 3.3V Power input to ADM7001/X and used by built-in 3.3 V to 2.5 V regulator.   |
| 36              | VCC25OUT  | A,PWR    |             | 2.5V Power output by ADM7001/X. Maximum Supply current from this pin is 200 mA |
| 29              | GNDTR     | A,GND    |             | Analog Ground Pad                                                              |
| 25              | VCCA_25   | A,PWR    |             | Analog 2.5 V Power                                                             |
| 32              | VCCPLL_25 | A,PWR    |             | Analog 2.5 V Power used by Clock Generator module.                             |

## 2.2.4 Clock Input, 2 Pins

**Table 6 Clock Input, 2 Pins**

| Pin or Ball No. | Name    | Pin Type | Buffer Type | Function                                                                                                                                                                             |
|-----------------|---------|----------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 40              | XI/OSCI | I        | CTL         | <b>Crystal/Oscillator input.</b><br>25M Crystal/Oscillator Input in MII mode and 50M Clock input in RMII mode (Also called REFCLK in RMII Mode).<br><i>Note: CTL: Crystal</i>        |
| 39              | XO      | O        | CTL         | <b>Crystal output.</b><br>When 25M Oscillator is used, this pin should left unconnected. Capable of driving one XI input for multiple port application.<br><i>Note: CTL: Crystal</i> |

## 2.2.5 MII/RMII/GPSI Interface, 16 pins

**Table 7 MII/RMII/GPSI Interface, 16 pins**

| Pin or Ball No. | Name            | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                      |
|-----------------|-----------------|----------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9               | II Mode TXCLK   | O        | 16mA        | <b>II Transmit Clock.</b><br>25M Clock output in 100BASE-X mode and 2.5M Clock output for 10BASE-T mode. This clock is continuously driven output and generated from XI. Before Speed is recognized, this pin drives out continuous 25M clock |
|                 | RMII Mode TXCLK |          |             | <b>N/A</b>                                                                                                                                                                                                                                    |
|                 | GPSI Mode TXCLK |          |             | <b>GPSI Transmit Clock.</b><br>10M Clock output in 10BASE-T mode.                                                                                                                                                                             |

**Interface Description**
**Table 7 MII/RMII/GPSI Interface, 16 pins (cont'd)**

| Pin or Ball No. | Name               | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------|--------------------|----------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 14, 13, 12, 11  | MII Mode TXD[3:0]  | I        | TTL PD      | <b>Transmit Data.</b><br>Nibble-wide transmit data stream in MII mode. These four bits are synchronous to the rising edge of TXCLK and TXD[3] is the most significant bit                                                                                                                                                                                                                                     |
|                 | RMII Mode TXD[3:0] |          |             | <b>Di-bits Transmit Data.</b><br>TXD0 and TXD1 for the di-bits that are transmitted and are driven synchronously to REFCLK. TXD[1] is the MSB. Note that in 100Mb/s mode, TXD can change once per REFCLK cycle, whereas in 10Mb/s mode, TXD must be held steady for 10 consecutive REFCLK cycles. TXD[3] and TXD[2] are not used in RMII Mode, left unconnected or pull down externally for normal operation. |
|                 | GPSI Mode TXD[3:0] |          |             | <b>Serial Transmit Data.</b><br>TXD0 for the designated port inputs the data that is transmitted and is driven synchronously to TXCLK in 10Mb/s mode. When ADM7001/X is programmed into GPSI mode, TXD[3:1] should be left unconnected or pull down externally for normal operation.                                                                                                                          |
| 10              | MII Mode TXEN      | I        | TTL PD      | <b>Transmit Enable.</b><br>Transmit Enable to indicate that the data on TXD[3:0] is valid.                                                                                                                                                                                                                                                                                                                    |
|                 | RMII Mode TXEN     |          |             | <b>Transmit Enable.</b><br>TXEN indicates that the di-bit on TXD is valid and it is driven synchronously to REFCLK.                                                                                                                                                                                                                                                                                           |
|                 | GPSI Mode TXEN     |          |             | <b>Transmit Enable.</b><br>Transmit Enable to indicate that the data on TXD0 is valid.                                                                                                                                                                                                                                                                                                                        |
| 8               | MII Mode TXER      | I        | TTL PD      | <b>Transmit Error.</b><br>Active high signal to indicate that there is error condition requested by MAC.                                                                                                                                                                                                                                                                                                      |
|                 | RMII Mode TXER     |          |             | <b>Transmit Error.</b><br>Active high signal to indicate that there is error condition requested by MAC.                                                                                                                                                                                                                                                                                                      |
|                 | GPSI Mode LOW      |          |             | Keep Low in GPSI Mode.                                                                                                                                                                                                                                                                                                                                                                                        |

**Interface Description**
**Table 7 MII/RMII/GPSI Interface, 16 pins (cont'd)**

| Pin or Ball No. | Name                     | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------|--------------------------|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4               | Power On Setting RMII_EN | I        | LVTTL PD    | <b>RMII Enable.</b><br>Used to select MII or RMII operation. The default value during power on reset is 0 (Before RMII_EN and GPSI value is determined)<br><i>Note: LVTTL: Low Voltage TTL Level</i><br>0 <sub>B</sub> , MII Mode<br>1 <sub>B</sub> , RMII Mode                                                                                                                                                                          |
|                 | MI Mode RX_CLK           | O        | 16mA        | <b>MI Receive Clock.</b><br>25M Clock output in 100BASE-X mode, 2.5M Clock output for 10BASE-T MI mode. This clock is recovered from the received data on the cable input. Due to recovered from incoming receive data, it is possible that RXCLK starts running yet RXDV keeps low for a while. During power on reset, there is no receiving clock driven by ADM7001/X                                                                  |
|                 | RMII Mode CLKO50         |          |             | <b>RMII 50M Clock Output.</b><br>This pin outputs continuous 50M clock in RMII mode. To reduce the BOM cost for system application, user can connect this pin directly to REFCLK to proper RMII operation.                                                                                                                                                                                                                               |
|                 | GPSI Mode RX_CLK         |          |             | <b>GPSI Receive Clock.</b><br>10M clock for 10BASE-T GPSI mode. This clock is recovered from the received data on the cable input. Due to recovered from incoming receive data, it is possible that RXCLK starts running yet CRS keeps low for a while. During power on reset, there is no receiving clock driven by ADM7001/X.<br><i>Note: That clock on this pin will not be active during power on reset due to power on setting.</i> |

**Interface Description**
**Table 7 MII/RMII/GPSI Interface, 16 pins (cont'd)**

| Pin or Ball No. | Name                             | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------|----------------------------------|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3               | Power On Setting<br>DIS_AMDIX_EN | I        | LVTTL<br>PD | <b>Disable Auto Crossover Function</b><br>Value on this pin will be latched by ADM7001/X to select Auto Cross-Over Function.<br><i>Note: LVTTL: Low Voltage TTL Level</i><br>0 <sub>B</sub> , Enable Auto Crossover<br>1 <sub>B</sub> , Disable Auto Crossover                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                 | MII Mode<br>RXDV                 | O        | 8mA         | <b>MII Receive Data Valid.</b><br>Active high signal to indicate that the data on RXD[3:0] is valid. Synchronous to the rising edge of RXCLK in MII mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                 | RMII Mode<br>CRSDV               |          |             | <b>RMII Carrier Sense/Receive Data Valid.</b><br>Represents Receive Carrier Sense and Data Valid in RMII mode. CRSDV asserts when the receive medium is non-idle. The assertion of CRSDV is asynchronous to REFCLK. At the de-assertion of carrier, CRSDV de-asserts synchronously to REFCLK only on the first di-bit of RXD. If there is still data in the FIFO not yet presented onto RXD, then on the second di-bit of RXD, CRSDV is asserted synchronously to REFCLK. The toggling of CRSDV_P on the first and second di-bit continues until all the data in the FIFO is presented onto RXD. CRSDV is asserted for the duration of carrier activity for a false carrier event. |
|                 | GPSI Mode<br>LOW                 |          |             | <b>Keep Low in GPSI Mode.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 45, 46, 47, 48  | Power On Setting<br>PHYAD[1:4]   | I        | TTL<br>PD   | <b>PHY Address Select</b><br>Value on these 4 pins combined with PHYAD0 will be stored into ADM7001/X as PHY physical address during power on reset. After power on reset, these 4 pins are output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                 | MII Mode<br>RXD[3:0]             | O        | 8mA         | <b>MII Receive Data.</b><br>Nibble-wide receive data stream in MII mode. These four bits are synchronous to the rising edge of RX_CLK and RXD[3] is the most significant bit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                 | RMII Mode<br>RXD[1:0]            |          |             | <b>RMII Receive Data.</b><br>RXD0 and RXD1 for the di-bits that are received and are driven synchronously to REFCLK. RXD[1] is the MSB. Note that in 100Mb/s mode, RXD can change once per REFCLK cycle, whereas in 10Mb/s mode, RXD must be held steady for 10 consecutive REFCLK cycles. RXD[3:2] have not used in this mode.                                                                                                                                                                                                                                                                                                                                                    |
|                 | GPSI Mode<br>RXD                 |          |             | <b>GPSI Receive Data.</b><br>RXD0 for the designated port inputs the data that is transmitted and is driven synchronously to RX_CLK in 10Mb/s mode. RXD[3:1] have not used in this mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Interface Description**
**Table 7 MII/RMII/GPSI Interface, 16 pins (cont'd)**

| Pin or Ball No. | Name                     | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------|--------------------------|----------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5               | Power On Setting ISOLATE | I        | TTL PD      | <b>ISOLATE</b><br>Value on this pin will be latched by ADM7001/X during power on reset.<br>0 <sub>B</sub> , Normal Operation<br>1 <sub>B</sub> , All MII outputs are tri-stated. All MII Inputs(TXD, TXEN, TXER) are ignored                                                                                                                                              |
|                 | MII Mode RXER            | O        | 4mA         | <b>MII Receive Error.</b><br>Active high signal to indicate that there is error condition detected by ADM7001/X. When error is detected, RXER will be high and maintains high until RXDV is de-asserted.                                                                                                                                                                  |
|                 | RMII Mode RXER           |          |             | <b>RMII Receive Error.</b><br>Active high signal to indicate that there is error condition detected by ADM7001/X. When error is detected, RXER will be high and maintains high until CRS DV is de-asserted.                                                                                                                                                               |
|                 | GPSI Mode N/A            |          |             | <b>No Operation in GPSI Mode.</b>                                                                                                                                                                                                                                                                                                                                         |
| 15              | Power On Setting GPSI    | I        | PD          | <b>GPSI Mode Select</b><br>Value on this pin will be sampled by ADM7001/X during power on reset to form GPSI internal control signal. Together with RMII_EN, these two pins form three possible internal supported by ADM7001/X.<br>RMII_EN GPSI Interface<br>0 <sub>B</sub> , 0 <sub>B</sub> MII<br>0 <sub>B</sub> , 1 <sub>B</sub> GPSI(1M8)<br>1 <sub>B</sub> , x RMII |
|                 | GPSI/MII Mode COL        | O        | 8mA         | <b>GPSI/MII Collision</b><br>In half duplex mode, active high to indicate that there is collision on the medium. In full duplex mode, this pin will keep low all the time.                                                                                                                                                                                                |
|                 | RMII Mode N/A            |          |             | <b>Not Available</b>                                                                                                                                                                                                                                                                                                                                                      |

**Table 7 MII/RMII/GPSI Interface, 16 pins (cont'd)**

| Pin or Ball No. | Name                      | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                                                                      |
|-----------------|---------------------------|----------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 16              | Power On Setting REPEATER | I        | LVTTL PD    | <b>Repeater Mode.</b><br>Value on this pin will be latched by ADM7001/X during power on reset as repeater mode<br><i>Note: LVTTL: Low Voltage TTL Level</i><br><br>$0_B$ , SW/NIC mode, CRS will be asserted according to RX/TX in half duplex mode.<br>$1_B$ , REPEATER mode. CRS will be asserted only in RX mode in half duplex operation. |
|                 | MII Mode CRS              | O        | 8mA         | <b>MII Carrier Sense.</b><br>This bit indicates that there is carrier sense presented on the medium. Note that in half duplex mode, this pin will also be asserted high by ADM7001/X under transmit condition. This pin is asynchronous to RX_CLK.                                                                                            |
|                 | RMII Mode N/A             |          |             | <b>Not Available.</b>                                                                                                                                                                                                                                                                                                                         |
|                 | GPSI Mode CRS             |          |             | <b>GPSI Carrier Sense.</b><br>This bit indicates that there is carrier sense presented on the medium. Note that in half duplex mode, this pin will also be asserted high by ADM7001/X under transmit condition. This pin is asynchronous to RX_CLK.                                                                                           |

*Note: LVTTL: Low Voltage TTL Level*

## 2.2.6 Reset Pin

**Table 8 Reset Pin**

| Pin or Ball No. | Name   | Pin Type | Buffer Type | Function                                                                                                                                                                            |
|-----------------|--------|----------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 42              | RESET# | I        | ST          | <b>Reset Signal</b><br>Active low to bring ADM7001/X into reset condition.<br>Recommend keeping low for at least 200 ms to ensure the stability of the system after power on reset. |

## 2.2.7 Clock Signals, 6 Pins

**Table 9 Clock Signals, 6 pins**

| Pin or Ball No. | Name                           | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                   |
|-----------------|--------------------------------|----------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 43              | MDIO                           | I/O      | LVTTL<br>PU | <b>Management Data.</b><br>MDIO transfers management data in and out of the device synchronous to MDC.<br><i>Note: LVTTL: Low Voltage TTL Level</i>                                                                                                                        |
| 44              | MDC                            | I        | LVTTL       | <b>Management Data Reference Clock.</b><br>A non-continuous clock input for management usage.<br>ADM7001/X will use this clock to sample data input on MDIO and drive data onto MDIO according to rising edge of this clock.<br><i>Note: LVTTL: Low Voltage TTL Level</i>  |
| 19              | Power On Setting<br>PHYAD0     | I        | LVTTL<br>PU | <b>PHY Address bit 0.</b><br>See RXD[3:0] description.<br><i>Note: LVTTL: Low Voltage TTL Level</i>                                                                                                                                                                        |
|                 | MII/RMII/GPSI<br>Mode<br>INTR# |          |             | <b>Interrupt</b><br>Default active low signal to indicate that there is interrupt event in SMI register. Active value of interrupt signal can be configured by register 18.1. Only available when interrupt mode is selected.<br><i>Note: LVTTL: Low Voltage TTL Level</i> |

**Table 9**      **Clock Signals, 6 pins (cont'd)**

| Pin or Ball No. | Name      | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------|-----------|----------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 24              | PWRDOWN#  | I        | LVTTL<br>PU | <b>Low Power Operation.</b><br><i>Note: When RESET# is reset to 0 and PWRDOWN# is set to 0, whole ADM7001/X blocks will be disabled.</i><br><br>$0_B$ , ADM7001/X in low power mode operation. All blocks except the energy detection and crystal oscillator are deactivated.<br>$1_B$ , ADM7001/X in normal mode operation.<br><i>Note: LVTTL: Low Voltage TTL Level</i> |
| 38, 30          | TEST[1:0] | I        | LVTTL<br>PD | <b>Industrial Test Pin.</b><br>Keeps low for normal operation.<br><i>Note: LVTTL: Low Voltage TTL Level</i>                                                                                                                                                                                                                                                               |

## 2.2.8 LED Interface, 4 Pins

**Table 10 LED Interface, 4 Pins**

| Pin or Ball No. | Name                    | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------|-------------------------|----------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 20              | Reserved                | I        | TTL<br>PU   | <b>Reserved.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                 | LNKACT                  | O        | 8mA         | <b>Link/Activity LED.</b><br>Active low (Note) 100ms (blink 100ms) to indicate that there is transmit or receive activity after Link Up. Keeps high all the time when link is failed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 21              | Power On Setting SPD100 | I        | TTL<br>PU   | <b>Recommend 100M Operation.</b><br>This bit is only available in TP mode. Together with ANEN to form speed mode select for ADM7001/X:<br>ANEN SPD100 Mode<br>$0_B, 0_B$ Force 10BASE-T Mode<br>$0_B, 1_B$ Force 100BASE-TX Mode<br>$1_B, 0_B$ 10M Capability<br>$1_B, 1_B$ 10/100M Capability                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                 | Normal Mode SPDLED      | O        | 8mA         | <b>Speed LED.(Note)</b><br>$0_B, 100M$<br>$1_B, 10M$<br><b>Cable Length LED.</b><br>When FXEN is low and MII register 18.2<br>DIS_CABLEN_LED is set to 0, this pin together with COLLED and LNKACTLED form cable length information on twisted pair<br><i>Note: That the following indication assume recommend value on SPDLED, COLLED and LNKACTLED is high, when corresponding bit's power on setting bit is 0, polarity of corresponding bit will be inverted.</i><br><b>SPDLED COLLED LNKACTLED Cable Length</b><br><i>Note: When recommend value during power on is high, then this signal is active low; if the recommend value is low, then this signal is active high.</i><br>$110_B, >140 \text{ meters or Link Failed}$<br>$110_B, 0 - 40 \text{ meters}$<br>$100_B, 40 - 80 \text{ meters}$<br>$000_B, 80 - 120 \text{ meters}$<br>$xxx_B, \text{ Flashed} \quad \text{Reserved}$ |

**Interface Description**
**Table 10 LED Interface, 4 Pins (cont'd)**

| Pin or Ball No. | Name                   | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                                                                                     |
|-----------------|------------------------|----------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 22              | Power On Setting DUFUL | I        | TTL PU      | <b>Duplex Control</b><br>This pin is only available when auto negotiation is disabled.<br>ANEN DUFUL Mode<br>0 <sub>B</sub> , 0 <sub>B</sub> Force to Half Duplex Mode<br>0 <sub>B</sub> , 1 <sub>B</sub> Force to Full Duplex Mode<br>1 <sub>B</sub> , 0 <sub>B</sub> Half Duplex Capability<br>1 <sub>B</sub> , 1 <sub>B</sub> Full/Half Duplex Capability |
|                 | Normal Mode DUPLED     | O        | 8 mA        | <b>Duplex LED.(Note)</b><br><i>Note: When recommend value during power on is high, then this signal is active low; if the recommend value is low, then this signal is active high. This rule also applies to Cable Length indication</i><br>0 <sub>B</sub> , Full Duplex<br>1 <sub>B</sub> , Half Duplex                                                     |
| 23              | Power On Setting ANEN  | I        | TTL PU      | <b>Auto Negotiation Enable.</b><br>This bit is only available in TP mode.<br>0 <sub>B</sub> , Disable Auto Negotiation<br>1 <sub>B</sub> , Enable Auto Negotiation                                                                                                                                                                                           |
|                 | Normal Mode COLLED     | O        | 8mA         | <b>Collision LED.</b><br>Keep high (Note) when ADM7001/X is in full duplex mode and will blink 100 ms when collision condition is detected in half duplex mode.<br><i>Note: When recommend value during power on is high, then this signal is active low; if the recommend value is low, then this signal is active high.</i>                                |

**2.2.9 Regulator Control**
**Table 11 Regulator Control**

| Pin or Ball No. | Name | Pin Type | Buffer Type | Function                                                                                   |
|-----------------|------|----------|-------------|--------------------------------------------------------------------------------------------|
| 31              | RTX  | AI       |             | <b>Constant Voltage Reference.</b><br>External 1.1kΩ +/- 1% resistor connection to ground. |

### **3 Function Description**

ADM7001/X integrates 100Base-X physical sub layer (PHY), 100Base-TX physical medium dependent (PMD) transceivers, and complete 10Base-T modules into a single chip for both 10 Mbps and 100 Mbps Ethernet operations. It also supports 100Base-FX operation through external fiber-optic transceivers. The device is capable of operating in either full-duplex mode or half-duplex mode in either 10 Mbps or 100 Mbps operation. Operational modes can be selected by hardware configuration pins, software settings of management registers, or determined by the on-chip auto negotiation logic.

The 10Base-T section of the device consists of the 10 Mbps transceiver module with filters and a Manchester ENDEC module.

ADM7001/X consists of seven kinds of major blocks:

- 10/100M PHY Block
- MAC Interface
- LED Display
- SMI
- Power Management
- Clock Generator
- Voltage Regulator

Each 10/100M PHY block contains:

- 10M PHY block
- 100M PHY block
- Auto-negotiation
- Other Digital Control Blocks

#### **3.1 10/100M PHY Block**

The 100Base-X section of the device implements the following functional blocks:

- 100Base-X physical coding sub-layer (PCS)
- 100Base-X physical medium attachment (PMA)
- Twisted-pair PMD (TP-PMD) transceiver

The 100Base-X and 10Base-T sections share the following functional blocks:

- Clock synthesizer module
- MII Registers
- IEEE 802.3u auto negotiation

The interface used for communication between PHY block and switch core is MII interface.

##### **3.1.1 100Base-X Module**

ADM7001/X implements 100Base-X compliant PCS and PMA, and 100Base-TX compliant TP-PMD as illustrated in [Figure 3](#). Bypass options for each of the major functional blocks within the 100Base-X PCS provide flexibility for various applications. 100 Mbit/s PHY loop back is included for diagnostic purpose.

##### **3.1.2 100Base-TX Receiver**

For 100Base-TX operation, the on-chip twisted pair receiver that consists of a differential line receiver, an adaptive equalizer and a base-line wander compensation circuits detects the incoming signal.

ADM7001/X uses an adaptive equalizer that changes filter frequency response in accordance with cable length. The cable length is estimated based on the incoming signal strength. The equalizer tunes itself automatically for any cable length to compensate for the amplitude and phase distortions incurred from the cable.

## Function Description


The 100Base-X receiver consists of functional blocks required to recover and condition the 125 Mbps receive data stream. The ADM7001/X implements the 100Base-X receiving state machine diagram as given in ANSI/IEEE Standard 802.3u, Clause 24. The 125 Mbps receive data stream may originate from the on-chip twisted-pair transceiver in a 100Base-TX application. Alternatively, the receive data stream may be generated by an external optical receiver as in a 100Base-FX application.

The receiver block consists of the following functional sub-blocks:

- A/D Converter
- Adaptive Equalizer and Timing Recovery Module
- NRZI/NRZ and Serial/Parallel Decoder
- De-scrambler
- Symbol Alignment Block
- Symbol Decoder
- Collision Detect Block
- Carrier Sense Block
- Stream Decoder Block

### A/D Converter

High performance A/D converter with 125M sampling rate converts signals received on RXP/RXN pins to 6-bits data streams; besides it possess auto-gain-control capability that will further improve receive performance especially under long cable or harsh detrimental signal integrity. Due to high pass characteristic on transformer, built in base-line-wander correcting circuit will cancel it out and restore its DC level.

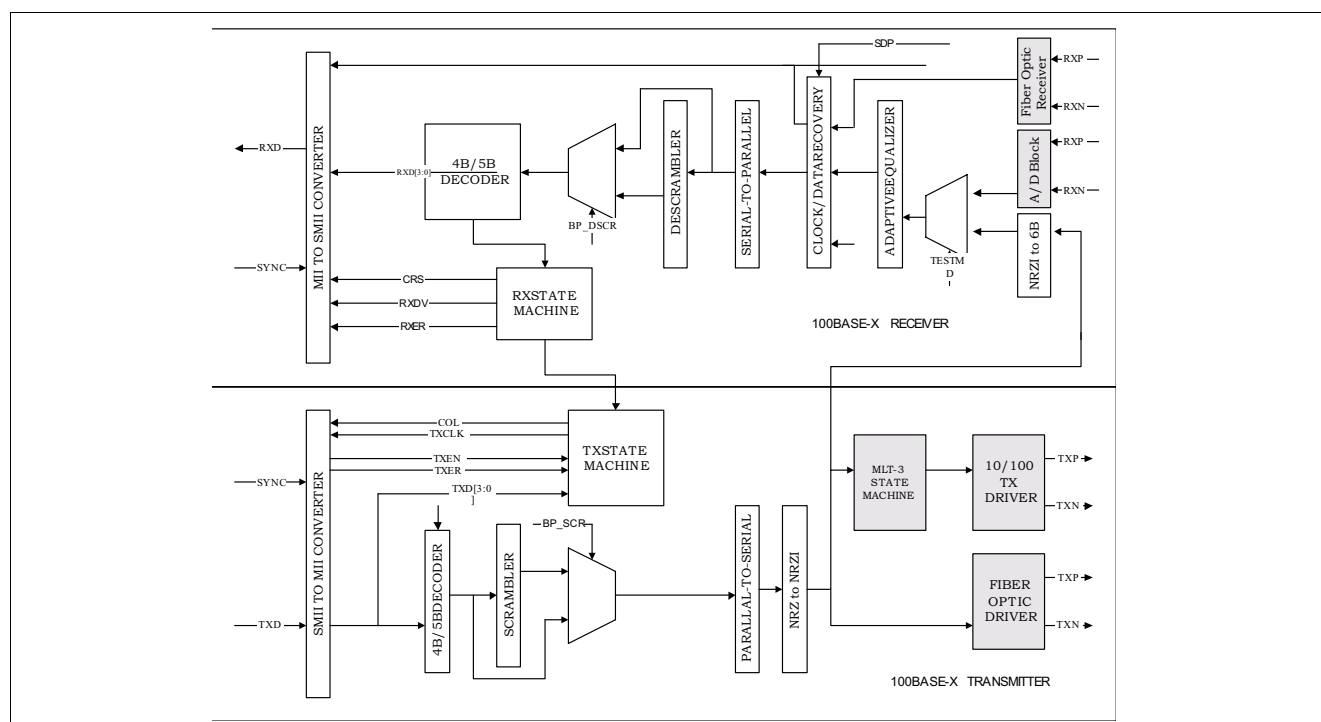

**Figure 3 100Base-X Block Diagram and Data Path**

### Adaptive Equalizer and Timing Recovery Module

All digital design is especially immune from noise environments, and achieves better correlations between production and system testing. Baud rate Adaptive Equalizer/Timing Recovery compensates line loss induced from twisted pair and tracks far end clock at 125M samples per second. Adaptive Equalizer implemented with Feed

**Function Description**

forward and Decision Feedback techniques meets the requirement of BER less than 10<sup>-12</sup> for transmission on CAT5 twisted pair cable ranging from 0 to 140 meters.

**NRZI/NRZ and Serial/Parallel Decoder**

The recovered data is converted from NRZI to NRZ. The data is not necessarily aligned to 4B/5B code group's boundary.

**Data Descrambling**

The descrambler acquires synchronization with the data stream by recognizing idle bursts of 40 or more bits and locking its deciphering Linear Feedback Shift Register (LFSR) to the state of the scrambling LFSR. Upon achieving synchronization, the incoming data is XORed by the deciphering LFSR and descrambled.

In order to maintain synchronization, the descrambler continuously monitors the validity of the unscrambled data that it generates. To ensure this, a link state monitor and a hold timer are used to constantly monitor the synchronization status. Upon synchronization of the descrambler the hold timer starts a 722  $\mu$ s countdown. Upon detection of at least 6 idle symbols (30 consecutive 1) within the 722  $\mu$ s period, the hold timer will reset and begin a new countdown. This monitoring operation will continue indefinitely to give a properly operating network connection with good signal integrity. If the link state monitor does not recognize at least 6 unscrambled idle symbols within 722  $\mu$ s period, the descrambler will be forced out of the current state of synchronization and reset in order to re-acquire synchronization.

**Symbol Alignment**

The symbol alignment circuit in the ADM7001/X determines code word alignment by recognizing the /J/K delimiter pair. This circuit operates on unaligned data from the descrambler. Once the /J/K symbol pair (11000 10001) is detected, subsequent data is aligned on a fixed boundary.

**Symbol Decoding**

The symbol decoder functions as a look-up table that translates incoming 5B symbols into 4B nibbles as shown in [Table 12](#). The symbol decoder first detects the /J/K symbol pair preceded by idle symbols and replaces the symbol with MAC preamble. All subsequent 5B symbols are converted to the corresponding 4B nibbles for the duration of the entire packet. This conversion ceases upon the detection of the /T/R symbol pair denoting the end of stream delimiter (ESD). The translated data is presented on the internal RXD[3:0] signal lines with RXD[0] represents the least significant bit of the translated nibble.

**Table 12 Look-up Table for Translating 5B Symbols into 4B Nibbles**

| PCS Code-Group[4:0] | Name | MII (TXD/RXD)<3:0> | Interpretation |
|---------------------|------|--------------------|----------------|
| 11110               | 0    | 0000               | Data 0         |
| 01001               | 1    | 0001               | Data 1         |
| 10100               | 2    | 0010               | Data 2         |
| 10101               | 3    | 0011               | Data 3         |
| 01010               | 4    | 0100               | Data 4         |
| 01011               | 5    | 0101               | Data 5         |
| 01110               | 6    | 0110               | Data 6         |
| 01111               | 7    | 0111               | Data 7         |
| 10010               | 8    | 1000               | Data 8         |
| 10011               | 9    | 1001               | Data 9         |
| 10110               | A    | 1010               | Data A         |
| 10111               | B    | 1011               | Data B         |

**Table 12 Look-up Table for Translating 5B Symbols into 4B Nibbles (cont'd)**

| PCS Code-Group[4:0] | Name | MII (TXD/RXD)<3:0> | Interpretation                                                      |
|---------------------|------|--------------------|---------------------------------------------------------------------|
| 11010               | C    | 1100               | Data C                                                              |
| 11011               | D    | 1101               | Data D                                                              |
| 11100               | E    | 1110               | Data E                                                              |
| 11101               | F    | 1111               | Data F                                                              |
| 11111               | I    | Undefined          | IDLEUsed as inter-stream fill code                                  |
| 11000               | J    | 0101               | Start-of-Stream Delimiter, Part 1 of 2; always used in pairs with K |
| 10001               | K    | 0101               | Start-of-Stream Delimiter, Part 2 of 2; always used in pairs with J |
| 01101               | T    | Undefined          | Start-of-Stream Delimiter, Part 1 of 2; always used in pairs with R |
| 0111                | R    | Undefined          | Start-of-Stream Delimiter, Part 2 of 2; always used in pairs with T |
| 00100               | H    | Undefined          | Transmit Error; used to force signaling errors                      |
| 00000               | V    | Undefined          | Invalid code                                                        |
| 00001               | V    | Undefined          | Invalid code                                                        |
| 00010               | V    | Undefined          | Invalid code                                                        |
| 00011               | V    | Undefined          | Invalid code                                                        |
| 00101               | V    | Undefined          | Invalid code                                                        |
| 00110               | V    | Undefined          | Invalid code                                                        |
| 01000               | V    | Undefined          | Invalid code                                                        |
| 01100               | V    | Undefined          | Invalid code                                                        |
| 10000               | V    | Undefined          | Invalid code                                                        |
| 11001               | V    | Undefined          | Invalid code                                                        |

### Valid Data Signal

The valid data signal (RXDV) indicates that recovered and decoded nibbles are presented on the internal RXD[3:0] synchronous to receive clock, RXCLK. RXDV is asserted when the first nibble of translated /J/K is ready for transfer over the internal MII. It remains active until either the /T/R delimiter is recognized, link test indicates failure, or no signal is detected. On any of these conditions, RXDV is deasserted.

### Receive Errors

The RXER signal is used to communicate with receiver error conditions. While the receiver is in a state of holding RXDV asserted, the RXER will be asserted for each code word which does not map to a valid code-group.

### 100Base-X Link Monitor

The 100Base-X link monitor function allows the receiver to ensure that reliable data is received. Without reliable data reception, the link monitor will halt both transmit and receive operations until a valid link is detected.

The ADM7001/X performs the link integrity test as outlined in IEEE 100Base-X (Clause 24) link monitor state diagram. The link status is multiplexed with 10 Mbits/s link status to form the reportable link status bit in serial management register 1h, and driven to the LNKACT pin.

When persistent signal energy is detected on the network, the logic moves into a Link-Ready state after approximately 500  $\mu$ s, and waits for an enable from the auto negotiation module. When receiving, the link-up state

**Function Description**

is entered, and the transmission and reception logic blocks become active. Should auto negotiation be disabled, the link integrity logic moves immediately to the link-up state after entering the link-ready state.

**Carrier Sense**

Carrier sense (CRS) for 100 Mbits/s operation is asserted upon the detection of two non contiguous zeros occurring within any 10-bit boundary of the received data stream.

The carrier sense function is independent of symbol alignment. In switch mode, CRS is asserted during either packet transmission or reception. For repeater mode, CRS is asserted only during packet reception. When the idle symbol pair is detected in the received data stream, CRS is deasserted. In repeater mode, CRS is only asserted due to receive activity. CRS is intended to encapsulate RXDV.

**Bad SSD Detection**

A bad start of stream delimiter (Bad SSD) is an error condition that occurs in the 100Base-X receiver if carrier is detected (CRS asserted) and a valid /J/K set of code-group (SSD) is not received.

If this condition is detected, the ADM7001/X will assert RXER and present RXD[3:0] = 1110 to the internal MII for the cycles that correspond to receive 5B code-groups until at least two idle code-groups are detected. Once at least two idle code groups are detected, RXER and CRS become deasserted.

**Far-End Fault**

Auto negotiation provides a mechanism for transferring information from the Local Station to the link Partner that a remote fault has occurred for 100Base-TX. As auto negotiation is not currently specified for operation over fiber, the far end fault indication function (FEFI) provides this capability for 100Base-FX applications.

A remote fault is an error in the link that one station can detect while the other cannot. An example of this is a disconnected wire at a station's transmitter. This station will receive valid data and detect that the link is good via the link integrity monitor, but will not be able to detect that its transmission is not propagating to the other station.

A 100Base-FX station that detects such a remote fault may modify its transmitted idle stream from all ones to a group of 84 ones followed by a single 0. This is referred to as the FEFI idle pattern.

The FEFI function is controlled by bit 3 of register 11<sub>H</sub>. It is initialized to 1 (encoded) if the SELFX pin is at logic high level during power on reset. If the FEFI function is enabled the ADM7001/X will halt all current operations and transmit the FEFI idle pattern when FOSD signal is de-asserted following a good link indication from the link integrity monitor. FOSD signal is generated internally from the internal signal detect circuit. Transmission of the FEFI idle pattern will continue until link up signal is asserted. If three or more FEFI idle patterns are detected by the ADM7001/X, bit 4 of the Basic mode status register (address 1h) is set to one until read by management. Additionally, upon detection of far end fault, all receive and transmit MII activities are disabled/ignored.

**3.1.3 100Base-TX Transmitter**

ADM7001/X implements a TP-PMD compliant transceiver for 100Base-TX operation. The differential transmit driver is shared by the 10Base-T and 100Base-TX subsystems. This arrangement results in one device that uses the same external magnetics for both the 10Base-T and the 100Base-TX transmission with simple RC component connections. The individually wave-shaped 10Base-T and 100Base-TX transmit signals are multiplexed in the transmission output driver selection.

ADM7001/X 100Base-TX transmission driver implements MLT-3 translation and wave-shaping functions. The rise/fall time of the output signal is closely controlled to conform to the target range specified in the ANSI TP-PMD standard.

**3.1.4 100Base-FX Receiver**

Signal is received through PECL receiver inputs from fiber transceiver, and directly passed to clock recovery circuit for data/clock recovery. Scrambler/de-scrambler is bypassed in 100Base-FX.

### **Automatic “Signal\_Detect” Function Block**

When DIS\_ANASDEN\_N in register 18 is set to 0, ADM7001/X doesn't support SDP detection in fiber mode, which is used to connect to fiber transceiver to indicate there is signal on the fiber. Instead, ADM7001/X uses the data on RXP/RXN to detect consecutive 65 “1” on the receive data (Recovered from RXP/RXN) to determine whether “Signal” is detected or not. When the detect condition is true (Consecutive 65 bits “1”), internal signal detect signal will be asserted to inform receive relative blocks to be ready for coming receive activities.

### **3.1.5 100Base-FX Transmitter**

In 100Base FX transmit, the serial data stream is driven out as NRZI PECL signals, which enter fiber transceiver in differential-pairs form. Fiber transceiver should be available working at 3.3 V environment.

### **3.1.6 10Base-T Module**

The 10Base-T Transceiver Module is IEEE 802.3 compliant. It includes the receiver, transmitter, collision, heartbeat, loopback, jabber, waveshaper, and link integrity functions, as defined in the standard. [Figure 4](#) provides an overview for the 10Base-T module.

The ADM7001/X 10Base-T module is comprised of the following functional blocks:

- Manchester encoder and decoder
- Collision detector
- Link test function
- Transmit driver and receiver
- Serial and parallel interface
- Jabber and SQE test functions
- Polarity detection and correction

### **3.1.7 Operation Modes**

The ADM7001/X 10Base-T module is capable of operating in either half-duplex mode or full-duplex mode. In half-duplex mode, the ADM7001/X functions as an IEEE 802.3 compliant transceiver with fully integrated filtering. The COL signal is asserted during collisions or jabber events, and the CRS signal is asserted during transmitting and receiving. In full duplex mode the ADM7001/X can simultaneously transmit and receive data.

### **3.1.8 Manchester Encoder/Decoder**

Data encoding and transmission begin when the transmission enable input (TXEN) goes high and continues as long as the transceiver is in good link state. Transmission ends when the transmission enable input goes low. The last transition occurs at the center of the bit cell if the last bit is 1, or at the boundary of the bit cell if the last bit is 0. A differential input receiver circuit accomplishes decoding and a phase-locked loop that separates the Manchester-encoded data stream into clock signals and NRZ data. The decoder detects the end of a frame when no more mid bit transitions are detected. Within one and half bit times after the last bit, carrier sense is deasserted.

### **3.1.9 Transmit Driver and Receiver**

The ADM7001/X integrates all the required signal conditioning functions in its 10Base-T block such that external filters are not required. Only one isolation transformer and impedance matching resistors are needed for the 10Base-T transmit and receive interface. The internal transmit filtering ensures that all the harmonics in the transmission signal are attenuated properly.

### **3.1.10 Smart Squelch**


The smart squelch circuit is responsible for determining when valid data is present on the differential receives. The ADM7001/X implements an intelligent receive squelch on the RXP/RXN differential inputs to ensure that impulse

**Function Description**

noise on the receive inputs will not be mistaken for a valid signal. The squelch circuitry employs a combination of amplitude and timing measurements (as specified in the IEEE 802.3 10Base-T standard) to determine the validity of data on the twisted-pair inputs.

The "analog squelch circuit" checks the signal at the start of the packet and any pulses not exceeding the squelch level (either positive or negative, depending upon polarity) will be rejected. Once this first squelch level is overcome correctly, the opposite squelch level must then be exceeded within 150ns. Finally, the signal must exceed the original squelch level within an additional 150ns to ensure that the input waveform will not be rejected.

Only after all these conditions have been satisfied will a control signal be generated to indicate to the remainder of the circuitry that valid data is present.

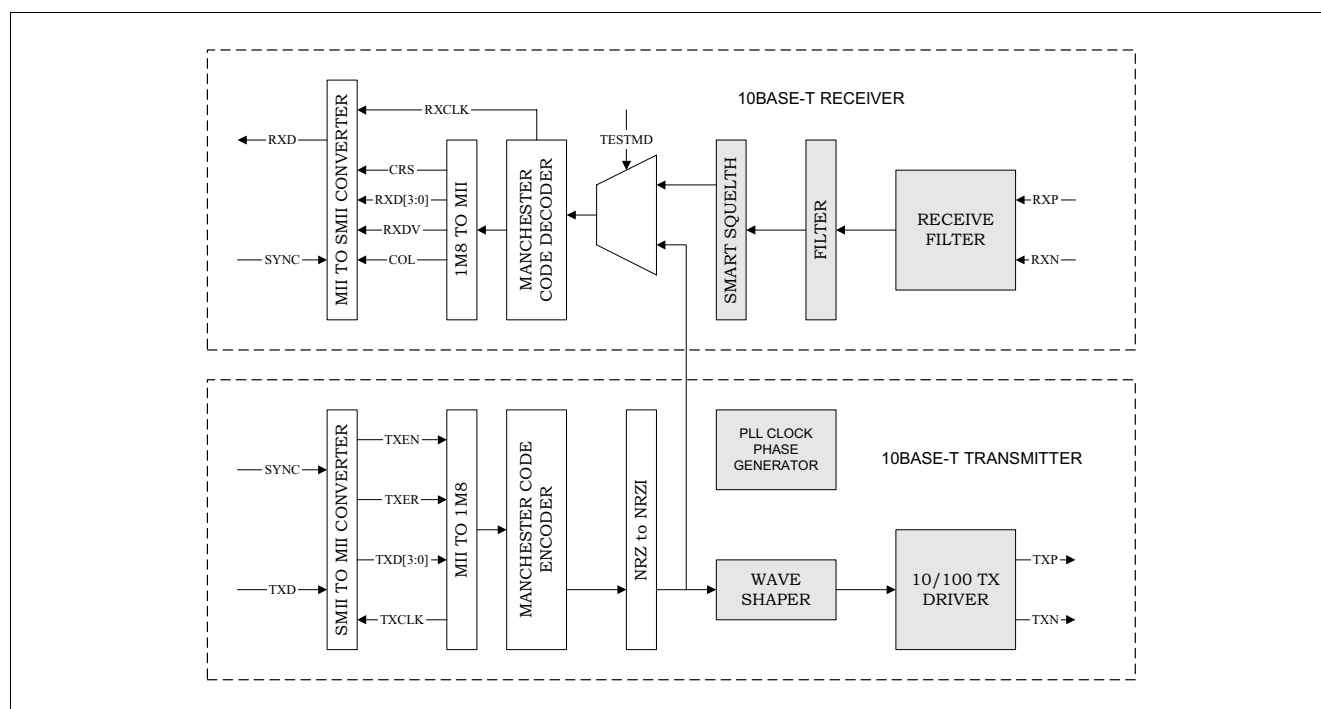

**Figure 4 10Base-T Block Diagram and Data Path**

Valid data is considered to be present until the squelch level has not been generated for a time longer than 200 ns, indicating end of packet. Once good data has been detected, the squelch levels are reduced to minimize the effect of noise, causing premature end-of-packet detection. The receive squelch threshold level can be lowered for use in longer cable applications. This is achieved by setting bit 7 of register address 10<sub>H</sub>.

### 3.1.11 Carrier Sense

Carrier Sense (CRS) is asserted due to receive activity once valid data is detected via the smart squelch function. For 10 Mbit/s half duplex operation, CRS is asserted during either packet transmission or reception. For 10 Mbit/s full duplex and repeater mode operations, the CRS is asserted only due to receive activity.

### 3.1.12 Collision Detection

Collision is detected internal to the MAC, which is generated by an AND function of TXEN and RXDV derived from internal timing recovery circuitry. Note should be taken that due to TXEN and RXDV are asynchronous to each other, COL signal outputted by ADM7001/X is irrelevant to either TXCLK or RXCLK.

### **3.1.13 Jabber Function**

The jabber function monitors the ADM7001/X output and disables the transmitter if it attempts to transmit a longer than legal sized packet. If TXEN is high for greater than 24ms, the 10Base-T transmitter will be disabled. Once disabled by the jabber function, the transmitter stays disable for the entire time that the TXEN signal is asserted. This signal has to be de-asserted for approximately 408 ms (The un-jab time) before the jabber function re-enables the transmit outputs. The jabber function can be disabled by programming bit 0 of register address 10<sub>H</sub> to high.

### **3.1.14 Link Test Function**

A link pulse is used to check the integrity of the connection with the remote end. If valid link pulses are not received, the link detector disables the 10Base-T twisted-pair transmitter, receiver, and collision detection functions.

The link pulse generator produces pulses as defined in IEEE 802.3 10Base-T standard. Each link pulse is nominally 100 ns in duration and is transmitted every 16 ms, in the absence of transmit data. Setting bit 10 of register 10<sub>H</sub> to high can disable link pulse check function.

### **3.1.15 Automatic Link Polarity Detection**

ADM7001/X's 10Base-T transceiver module incorporates an "automatic link polarity detection circuit". The inverted polarity is determined when seven consecutive link pulses of inverted polarity or three consecutive packets are received with inverted end-of-packet pulses. If the input polarity is reversed, the error condition will be automatically corrected and reported in bit 13 of register 11<sub>H</sub>.

### **3.1.16 Clock Synthesizer**

The ADM7001/X implements a clock synthesizer that generates all the reference clocks needed from a single external frequency source. The clock source must be a TTL level signal at 25 MHz  $\pm$  50ppm.

### **3.1.17 Auto Negotiation**

The Auto Negotiation function provides a mechanism for exchanging configuration information between two ends of a link segment and automatically selecting the highest performance mode of operation supported by both devices. Fast Link Pulse (FLP) Bursts provides the signaling used to communicate auto negotiation abilities between two devices at each end of a link segment. For further detail regarding auto negotiation, refer to Clause 28 of the IEEE 802.3u specification. The ADM7001/X supports four different Ethernet protocols, so the inclusion of auto negotiation ensures that the highest performance protocol will be selected based on the ability of the link partner.

The auto negotiation function within the ADM7001/X can be controlled either by internal register access or by the use of configuration pins are sampled. If disabled, auto negotiation will not occur until software enables bit 12 in register 0. If auto negotiation is enabled, the negotiation process will commence immediately.

When auto negotiation is enabled, the ADM7001/X transmits the abilities programmed into the auto negotiation advertisement register at address 04<sub>H</sub> via FLP bursts. Any combination of 10 Mbps, 100 Mbps, half duplex and full duplex modes may be selected. Auto negotiation controls the exchange of configuration information. Upon successfully auto negotiation, the abilities reported by the link partner are stored in the auto negotiation link partner ability register at address 05<sub>H</sub>.

The contents of the "auto negotiation link partner ability register" are used to automatically configure to the highest performance protocol between the local and far-end nodes. Software can determine which mode has been configured by auto negotiation by comparing the contents of register 04<sub>H</sub> and 05<sub>H</sub> and then selecting the technology whose bit is set in both registers of highest priority relative to the following list.

- 100Base-TX full duplex (highest priority)
- 100Base-TX half duplex
- 10Base-T full duplex

- 10Base-T half duplex (lowest priority)

The basic mode control register at address 0<sub>H</sub> provides control of enabling, disabling, and restarting of the auto negotiation function. When auto negotiation is disabled, the speed selection bit (bit 13) controls switching between 10 Mbps or 100 Mbps operation, while the duplex mode bit (bit 8) controls switching between full duplex operation and half duplex operation. The speed selection and duplex mode bits have no effect on the mode of operation when the auto negotiation enable bit (bit 12) is set.

The basic mode status register (BMSR) at address 1<sub>H</sub> indicates the set of available abilities for technology types (bit 15 to bit 11), auto negotiation ability (bit 3), and extended register capability (bit 0). These bits are hardwired to indicate the full functionality of the ADM7001/X. The BMSR also provides status on:

- Whether auto negotiation is complete (bit 5)
- Whether the Link Partner is advertising that a remote fault has occurred (bit 4)
- Whether a valid link has been established (bit 2)

The auto negotiation advertisement register at address 4<sub>H</sub> indicates the auto negotiation abilities to be advertised by the ADM7001/X. All available abilities are transmitted by default, but writing to this register or configuring external pins can suppress any ability.

The auto negotiation link partner ability register at address 05<sub>H</sub> indicates the abilities of the Link Partner as indicated by auto negotiation communication. The contents of this register are considered valid when the auto negotiation complete bits (bit 5, register address 1<sub>H</sub> and bit 4, register 17<sub>H</sub>) are set.

### 3.1.18 Auto Negotiation and Speed Configuration

The twelve sets of four pins listed in [Table 13](#) configure the speed capability of each channel of ADM7001/X. The logic state of these pins is latched into the advertisement register (register address 4<sub>H</sub>) for auto negotiation purpose. These pins are also used for evaluating the default value in the base mode control register (register 0<sub>H</sub>) according to [Table 13](#) Channel Configuration.

## 3.2 MAC Interface


The ADM7001/X interfaces to 10/100 Media Access Controllers (MAC) via the RMII, MII, or GPSI Interface.

### 3.2.1 Reduced Media Independent Interface (RMII)

The reduced media Independent interface (RMII) is compliant to the RMII consortium's RMII Rev. 1.2 specification. The REFCLK pin that supplies the 50 MHz reference clock to the ADM7001/X is used as the RMII REFCLK signal. All RMII signals with the exception of CRS<sub>DV\_P</sub> are synchronous to REFCLK. See [Figure 5](#)





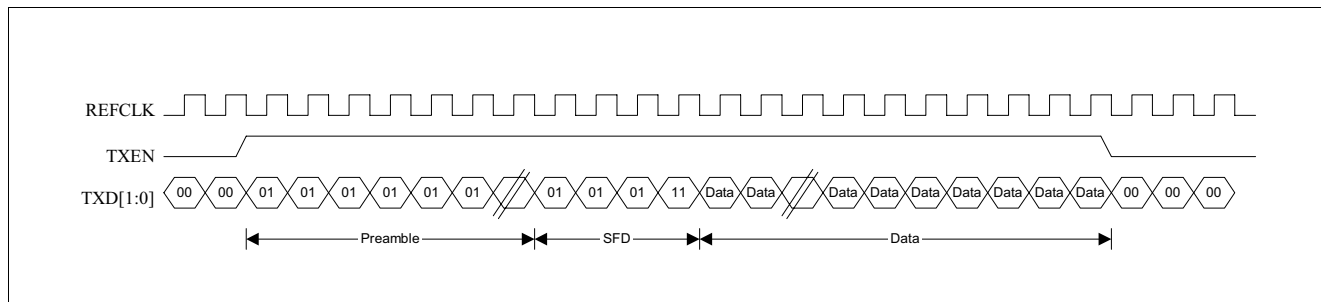


**Figure 10 100M RMII Transmit Diagram**

### 3.2.5 Transmit Path for 10M

In 10MBSE-T mode, each di-bit must be repeated 10 times by the MAC, TXEN and TXD[1:0] should be synchronous to REFCLK. When TXEN is asserted, it indicates that data on TXD[1:0] is valid for transmission.

In 10Base-T mode, it is possible that the number of preamble bits and the number of frame bits received are not integer nibbles. The preamble is always padded up such that the SFD appears on the RMII aligned to the nibble boundary. Extra bits at the end of the frame that do not complete a nibble are truncated by AD7001. **Figure 11** shows the timing diagram for 10M Transmission.

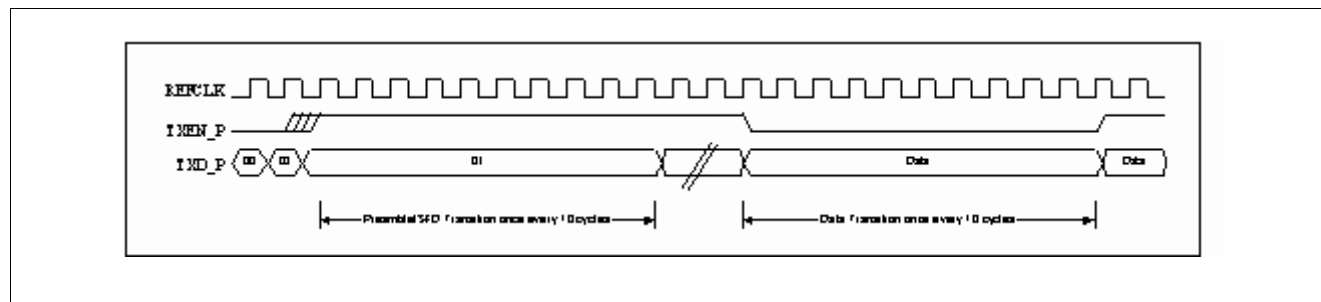

**Figure 11 10M RMII Transmit Diagram**

**Table 13 Channel Configuration**

| Recommend Value |         |                | Auto Negotiation |         | Capability |          |         |         |
|-----------------|---------|----------------|------------------|---------|------------|----------|---------|---------|
| ANENDIS         | REC_10M | TP_FULL DUPLEX | Enable           | Disable | 100 Full   | 100 Half | 10 Full | 10 Half |
| 1               | 1       | 1              | √                |         | √          | √        | √       | √       |
| 1               | 1       | 0              | √                |         |            | √        |         | √       |
| 1               | 0       | 1              | √                |         |            |          | √       | √       |
| 1               | 0       | 0              | √                |         |            |          |         | √       |
| 0               | 1       | 1              |                  | √       | √          |          |         |         |
| 0               | 1       | 0              |                  | √       |            | √        |         |         |
| 0               | 0       | 1              |                  | √       |            |          | √       |         |
| 0               | 0       | 0              |                  | √       |            |          |         | √       |

### 3.2.6 Media Independent Interface (MII)

Signal Diagram for MII interface is shown in **Figure 12**.

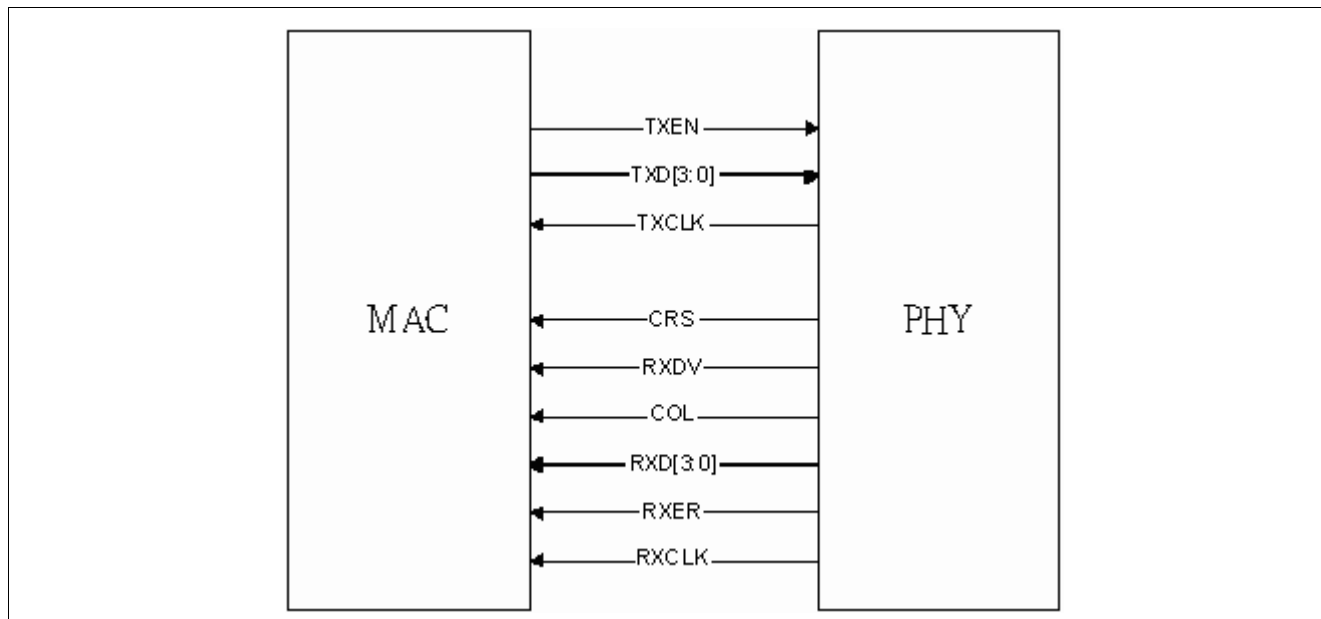


Figure 12 MII Signal Diagram

### 3.2.7 Receive Path for MII

**Figure 13** shows the relationship among RXCLK, RXDV, RXD and CRS during a reception of valid packet. Carrier sense is detected and asserted asynchronously to RXCLK by ADM7001/X. When ADM7001/X detects there is valid data, RXDV and the received data are presented onto RXD[3:0] synchronously to RX\_CLK. Whenever received data is not valid anymore, RXDV will be de-asserted by ADM7001/X and "0" will be put on RXD[3:0].

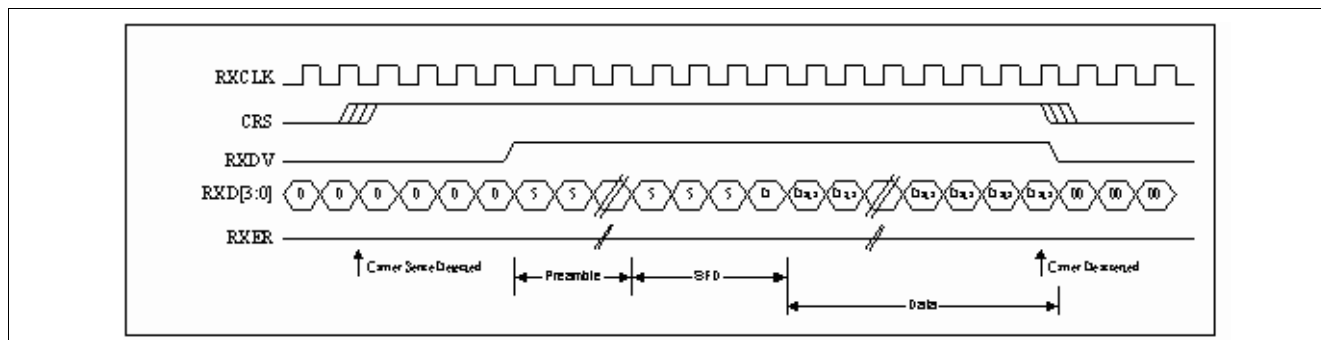



Figure 13 MII Receive Without Error

**Figure 14** shows the relationship among RXCLK, RXDV and RXD[3:0] during a received false carrier event. CRS is asserted asynchronously to RXCLK as in the valid receive case shown in **Figure 15**. However, once false carrier is detected, RXD[3:0] is changed to (1110) and RXER is asserted. Both RXD[3:0] and RXER transit synchronously to RXCLK.




### 3.2.8 Transmit Path for MII

**Figure 16** shows the relationship among TXCLK, TXEN and TXD[3:0] during a transmit event. TXEN and TXD[3:0] are synchronous to TXCLK, which is generated by MAC. TXCLK is running at 25M in 100M mode and 2.5M in 10M mode. When TXEN is asserted, it indicates that TXD[3:0] contains valid data to be transmitted. When TXEN is de-asserted, value on TXD[1:0] should be ignored.

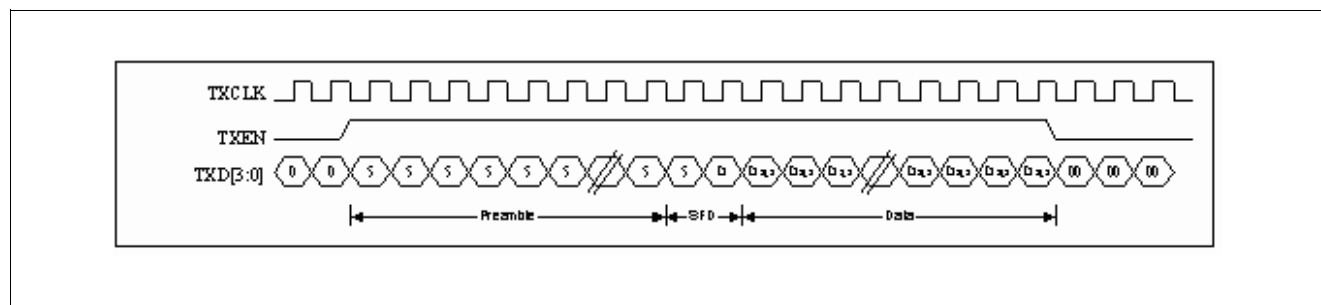

**Figure 16 MII Transmission**

When ADM7001/X operates in half duplex mode, either 10M or 100M, it will assert COL signal whenever it detects there is collision on the medium. **Figure 17** shows the timing diagram for MII Collision.

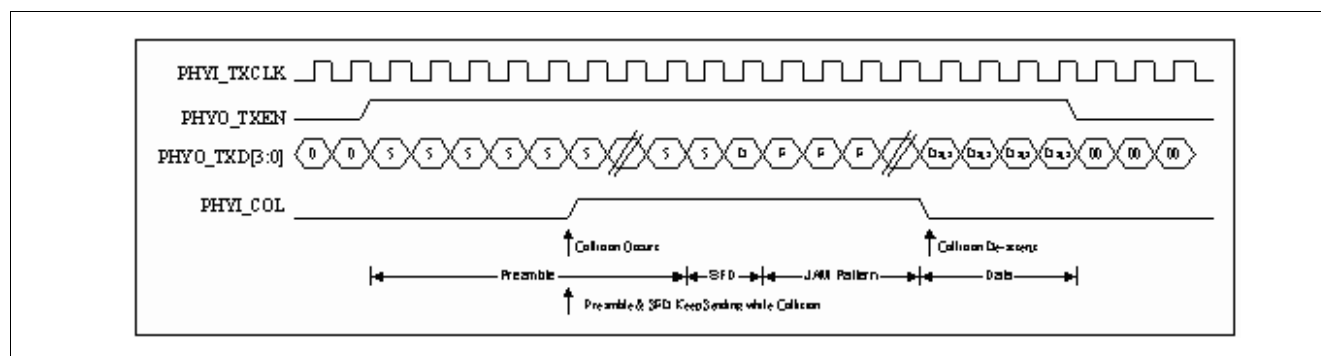

**Figure 17 MII Transmit with Collision (Half Duplex Only)**

### 3.2.9 General Purpose Serial Interface (GPSI)

Signal Diagram for MII interface is shown in **Figure 18**.

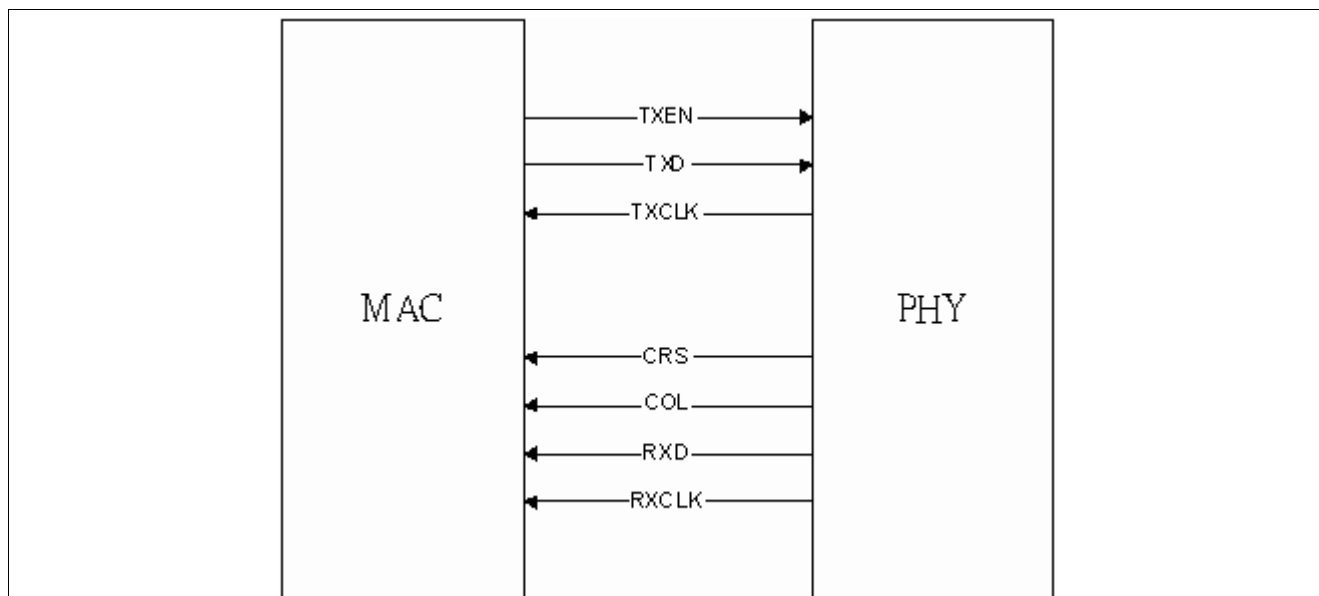


Figure 18 GPSI Signal Diagram

### 3.2.10 Receive Path for GPSI

**Figure 19** shows the relationship among RXCLK, RXD and CRS during a receive of valid packet. Carrier sense is detected and asserted asynchronously to RXCLK by ADM7001/X. When ADM7001/X detects there is valid data, received data is presented onto RXD synchronously to RXCLK. Whenever received data is not valid anymore, CRS will be de-asserted by ADM7001/X and "0" will be put on RXD.

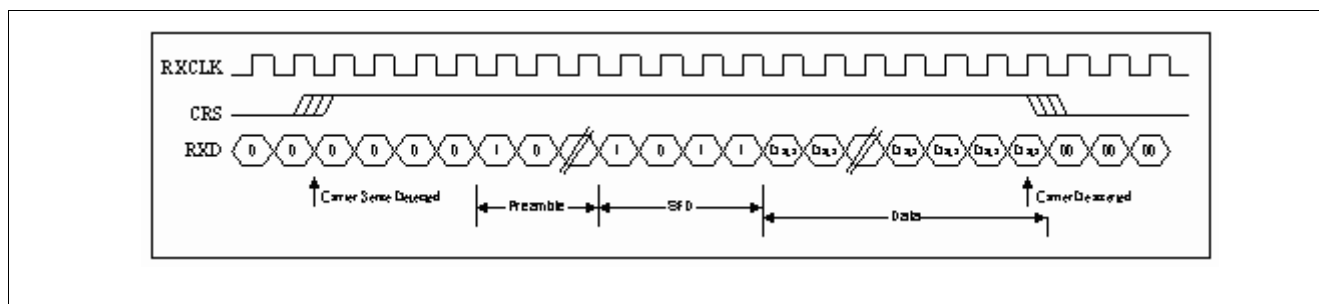
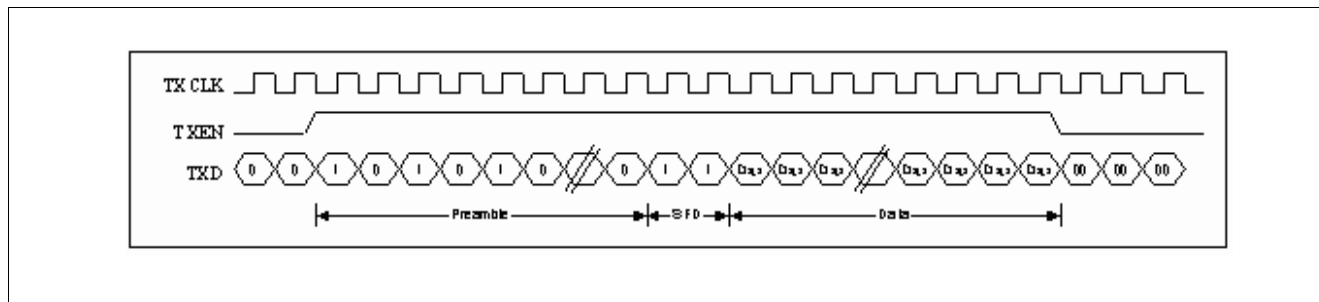


Figure 19 GPSI Receive Diagram

### 3.2.11 Transmit Path for GPSI

**Figure 20** shows the relationship among TXCLK, TXEN and TXD during a transmit event. TXEN and TXD are synchronous to TXCLK, which is generated by MAC. TXCLK is running at 10M in 10M mode. When TXEN is asserted, it indicates that TXD contains valid data to be transmitted. When TXEN is de-asserted, value on TXD should be ignored.


**Figure 20** GPSI Transmit Diagram

### 3.3 LED Display

Register 19 is used for different mode led display. ADM7001/X provides power on LED self test to minimize and ease the system test cost.

All LEDs will be Off during power on reset (Output value same as recommend value on LED pins). After power on reset, all internal parallel LEDs will be On for 2 seconds to ease manufacture overhead

There are three types of LED supported by ADM7001/X internally. The first is LNKACT, which represents the status of Link and Transmit/Receive Activity, the second is LDSPD, which indicates the speed status, and the last is DUPCOL, which shows pure duplex status in full duplex and duplex/collision combined status in half duplex. All these three LED can be controlled by Register 19 to change display contents.

After LED self test, [Table 14](#), [Table 15](#), [Table 16](#) show the On/Off polarity according to different recommended value setting for LDSPD, DUPCOL and LNKACT. When the recommend value is high, ADM7001/X will drive LED LOW; ADM7001/X will drive the LED HIGH when the recommend value is low, instead.

**Table 14** Speed LED Display

| SPEED     | SPDLED |
|-----------|--------|
| 10M       | 0      |
| 100M      | 1      |
| LINK FAIL | 1      |

**Table 15** Duplex LED Display

| DUPLEX    | DUPCOL                      |                   |
|-----------|-----------------------------|-------------------|
|           | HALF                        | FULL              |
| LINK UP   | Blink (HIGH) When Collision | LOW All the Time  |
| LINK FAIL | HIGH All the Time           | HIGH All the Time |

**Table 16** Activity/Link LED Display

| SPEED     | Link/Activity     |                         |
|-----------|-------------------|-------------------------|
|           | Link              | Activity                |
| LINK UP   | LOW               | Blink (HIGH) When RX/TX |
| LINK FAIL | HIGH All the Time | HIGH All the Time       |

Besides duplex, speed, link and activity status, ADM7001/X also provides cable information that can be shown on LEDs when register 19 is programmed to distance LED display (see [Table 17](#))

**Table 17 Cable Distance LED Display**

| LNKACT | DUPCOL | LEDSPD | Cable Distance   |
|--------|--------|--------|------------------|
| 1      | 1      | 0      | 0 to 40 meters   |
| 1      | 0      | 0      | 40 to 80 meters  |
| 0      | 0      | 0      | 80 to 120 meters |
| 1      | 1      | 1      | Reserved         |

### 3.4 Management Register Access

The SMI consists of two pins, management data clock (MDC) and management data input/output (MDIO). The ADM7001/X is designed to support an MDC frequency specified in the IEEE specification of up to 2.5 MHz. The MDIO line is bi-directional and may be shared by up to 32 devices.


The MDIO pin requires a 1.5 K $\Omega$  pull-up which, during idle and turnaround periods, will pull MDIO to a logic one state. Each MII management data frame is 64 bits long. The first 32 bits are preamble consisting of 32 contiguous logic one bits on MDIO and 32 corresponding cycles on MDC. Following preamble is the start-of-frame field indicated by a <01> pattern. The next field signals the operation code (OP): <10> indicates read from MII management register operation, and <01> indicates write to MII management register operation. The next two fields are PHY device address and MII management register address. Both of them are 5 bits wide and the most significant bit is transferred first.

During Read operation, a 2-bit turn around (TA) time spacing between the register address field and data field is provided for the MDIO to avoid contention. Following the turnaround time, a 16-bit data stream is read from or written into the MII management registers of the ADM7001/X

#### 3.4.1 Preamble Suppression

The ADM7001/X supports a preamble suppression mode as indicated by an 1 in bit 6 of the basic mode status register (Register 1h). If the station management entity (i.e. MAC or other management controller) determines that all PHYs in the system support preamble suppression by reading a 1 in this bit, then the station management entity needs not to generate preamble for each management transaction. The ADM7001/X requires a single initialization sequence of 32 bits of preamble following powerup/hardware reset. This requirement is generally met by pulling-up the resistor of MDIO. While the ADM7001/X will respond to management accesses without preamble, a minimum of one idle bit between management transactions is required as specified in IEEE 802.3u.

When ADM7001/X detects that there is physical address match, then it will enable Read/Write capability for external access. When neither physical address nor register address is matched, then ADM7001/X will tristate the MDIO pin.

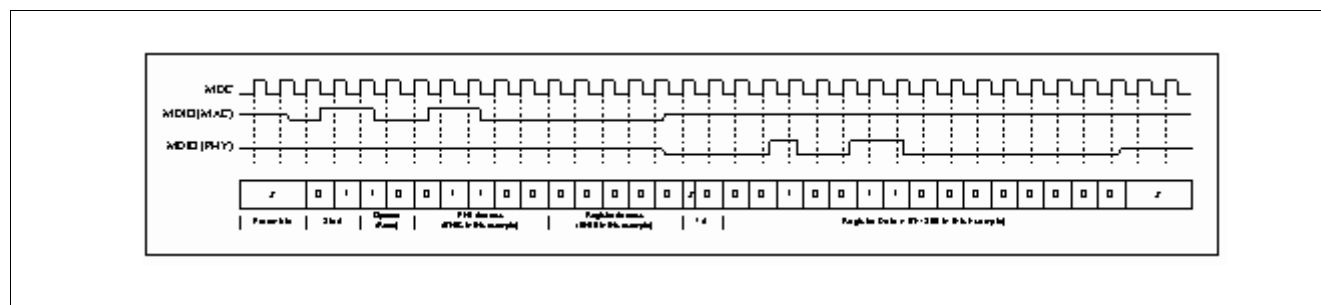
**Figure 21 SMI Read Operation**


#### 3.4.2 Reset Operation

The ADM7001/X can be reset either by hardware or software. A hardware reset is accomplished by applying a negative pulse, with duration of at least 200 ms to the RC pin of the ADM7001/X during normal operation to

**Function Description**

guarantee internal Power On Reset Circuit is reset well. Setting the reset bit in the Basic Mode Control activates software reset

Register (bit 15, register 0<sub>H</sub>). This bit is self-clearing and, when set, will return a value of 1 until the software reset operation has completed, please note that internal SRAM will not be reset during software reset.

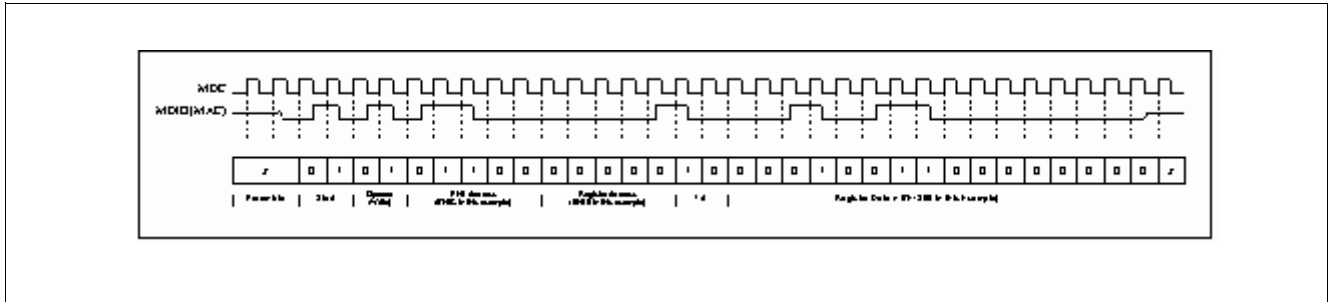

**Figure 22 SMI Write Operation**

Hardware reset operation samples the pins and initializes all registers to their default values. This process includes re-evaluation of all hardware configurable registers.

A software reset will reset an individual PHY and it does not latch the external pins nor reset the registers to their respective default value.

Logic levels on several I/O pins are detected during a hardware reset to determine the initial functionality of ADM7001/X. Some of these pins are used as output ports after reset operation.


Care must be taken to ensure that the configuration setup will not interfere with normal operation. Dedicated configuration pins can be tied to VCC or Ground directly. Configuration pins multiplexed with logic level output functions should be either weakly pulled up or weakly pulled down through resistors.

### 3.5 Power Management

An analog block is designed for carrier sense detecting. When there is no carrier sense presented on medium (cable not attached), then "SIGNAL DETECT" will not be ON. Whenever cable is attached to ADM7001/X and the voltage threshold is above +/- 50mV, then SD will be asserted HIGH to indicate that there is cable attached to ADM7001/X. All internal blocks except Management block will be disabled (reset) before SD is asserted.

When SD is asserted, internal Auto Negotiation block will be turned on and the 10M transmit driver will also be turned on for auto negotiation process. Auto negotiation will issue control signals to control 10M receive and 100M A/D block according to different state in arbitration block diagram. During auto negotiation, all digital blocks except management and link monitor blocks will be disabled to reduce power consumption.

Whenever operating speed is determined (Either auto negotiation is On or Off), the non-active speed relative circuit will be disabled all the time to save more power. For example, when corresponding port is operating on 10M, then 100M relative blocks will be disabled and 10M relative blocks will be disabled whenever corresponding port is in 100M mode. Auto negotiation block will be reset when SD signal goes from high to low. See [Figure 23](#) for the state diagram for this algorithm.

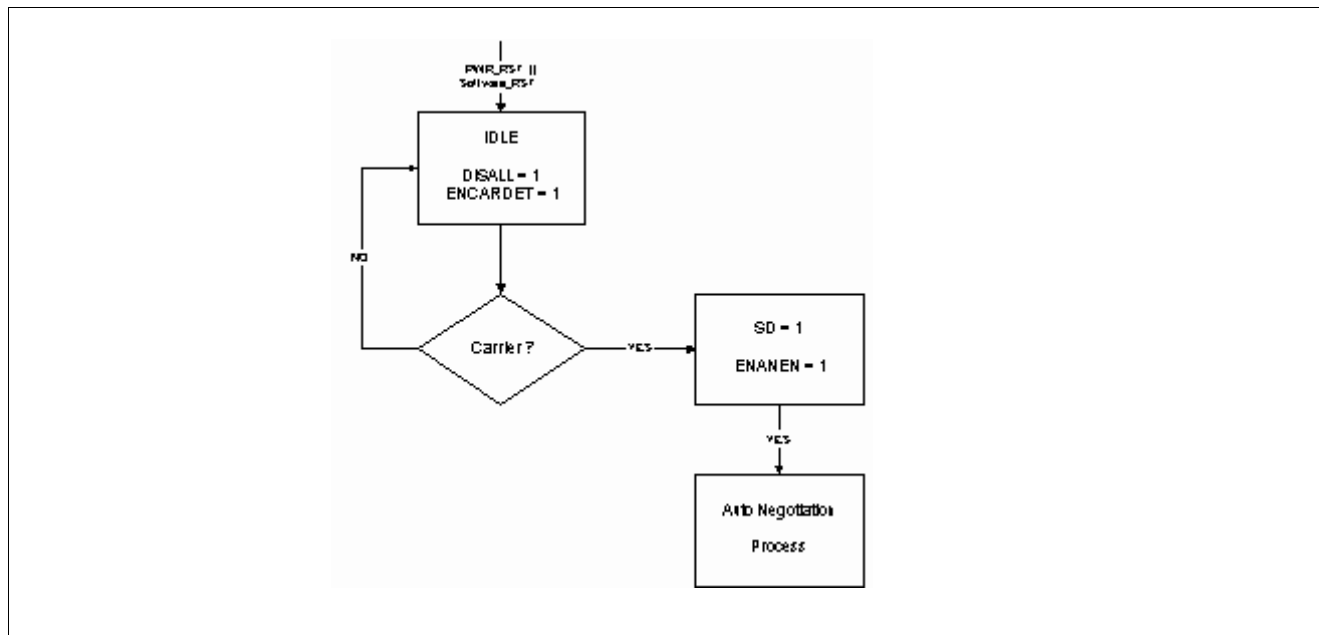


**Figure 23 Medium Detect Power Management Flow Chart**

Another way to reduce instant power is to separate the LED display period. All 4 LEDs will be divided into 4 time frame and each time frame occupies 1  $\mu$ s. One and only one LED will be driven at each time frame to reduce instant current consumed from LED.

### 3.6 Voltage Regulator

ADM7001/X requires two different levels, 3.3 V and 2.5 V, of voltage supply to provide the power to different parts of circuitry inside the chip. ADM7001/X has a build-in voltage regulator circuitry to generate the 2.5 V voltage (VCC25OUT) from 3.3 V power source (VCC3IN). External Application Circuitry is shown in [Figure 24](#).

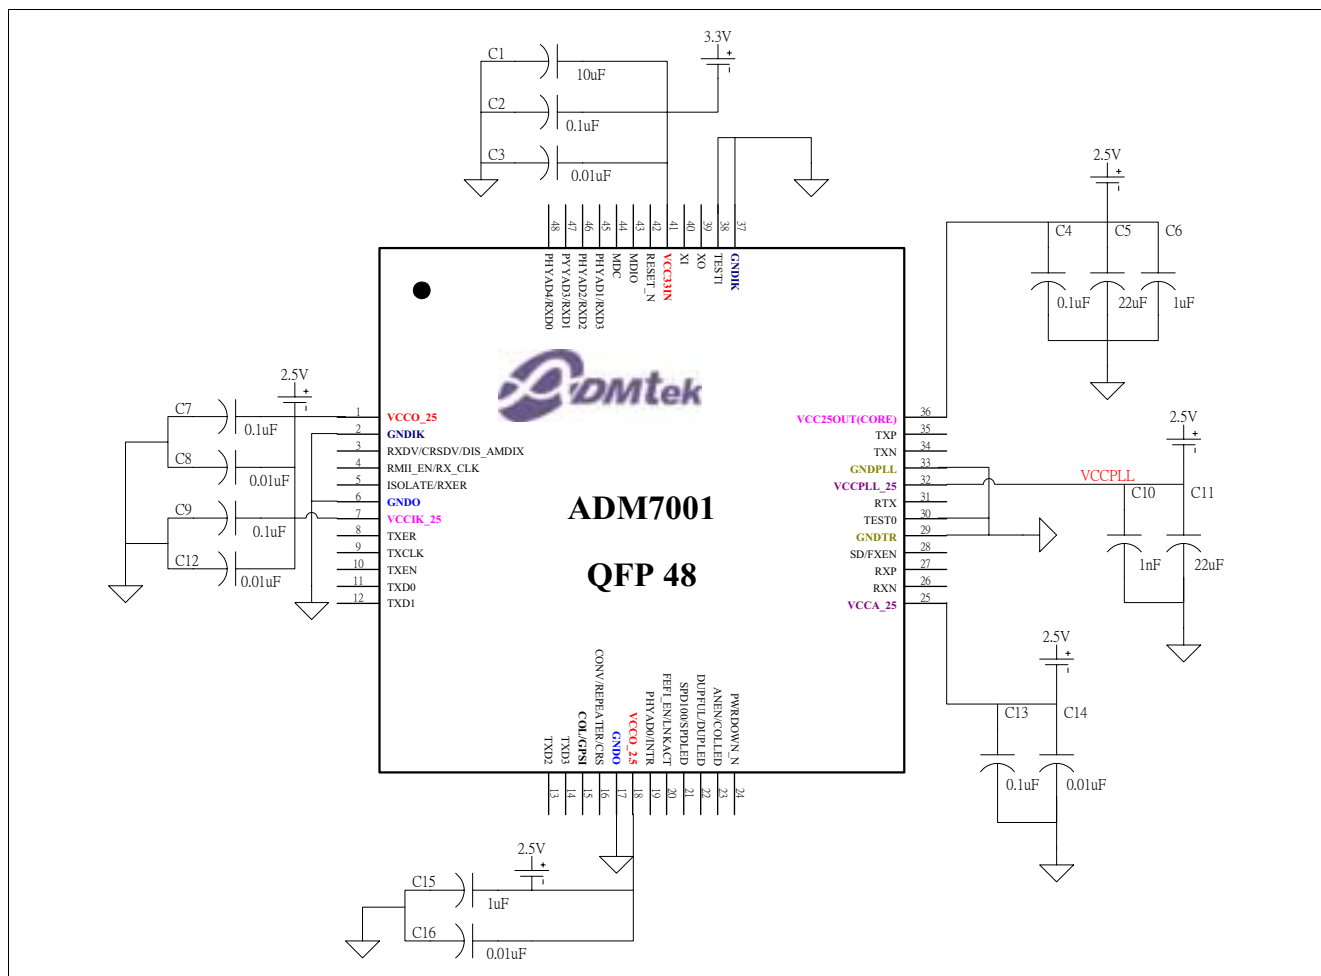**Function Description**

**Figure 24 Power and Ground Filtering**

## 4 Registers Description

**Table 18 Registers Address Space**

| Module | Base Address    | End Address     | Note |
|--------|-----------------|-----------------|------|
| PHY    | 00 <sub>H</sub> | 1F <sub>H</sub> |      |

**Table 19 Registers Overview**

| Register Short Name  | Register Long Name                         | Offset Address  | Page Number |
|----------------------|--------------------------------------------|-----------------|-------------|
| <b>CR</b>            | Control Register                           | 00 <sub>H</sub> | <b>50</b>   |
| <b>SR</b>            | Status Register                            | 01 <sub>H</sub> | <b>52</b>   |
| <b>PHY_IR0</b>       | PHY Identifier Register 0                  | 02 <sub>H</sub> | <b>55</b>   |
| <b>PHY_IR1</b>       | PHY Identifier Register 1                  | 03 <sub>H</sub> | <b>55</b>   |
| <b>Advertisement</b> | Auto Negotiation Advertisement Register    | 04 <sub>H</sub> | <b>56</b>   |
| <b>ANLPA</b>         | Auto Negotiation Link Partner Ability      | 05 <sub>H</sub> | <b>57</b>   |
| <b>ANER</b>          | Auto Negotiation Expansion Register        | 06 <sub>H</sub> | <b>58</b>   |
| <b>Res0</b>          | Reserved 0                                 | 07 <sub>H</sub> | <b>59</b>   |
| <b>GPCR</b>          | Generic PHY Control/Configuration Register | 10 <sub>H</sub> | <b>60</b>   |
| <b>P10_MCR</b>       | PHY 10M Module Configuration Register      | 11 <sub>H</sub> | <b>62</b>   |
| <b>P100_MCR</b>      | PHY 100M Module Control Register           | 12 <sub>H</sub> | <b>64</b>   |
| <b>LCR</b>           | LED Configuration Register                 | 13 <sub>H</sub> | <b>65</b>   |
| <b>IER</b>           | Interrupt Enable Register                  | 14 <sub>H</sub> | <b>67</b>   |
| <b>PGSR</b>          | PHY Generic Status Register                | 16 <sub>H</sub> | <b>68</b>   |
| <b>PSSR</b>          | PHY Specific Status Register               | 17 <sub>H</sub> | <b>69</b>   |
| <b>PRVSR</b>         | PHY Recommend Value Status Register        | 18 <sub>H</sub> | <b>70</b>   |
| <b>ISR</b>           | Interrupt Status Register                  | 19 <sub>H</sub> | <b>71</b>   |
| <b>RECR</b>          | Receive Error Counter Register             | 1D <sub>H</sub> | <b>72</b>   |
| <b>CIR</b>           | Chip ID Register                           | 1F <sub>H</sub> | <b>73</b>   |

The register is addressed wordwise.

**Table 20 Registers Access Types**

| Mode                         | Symbol | Description Hardware (HW)                                                        | Description Software (SW)                                                                                                                                             |
|------------------------------|--------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| read/write                   | rw     | Register is used as input for the HW                                             | Register is read and writable by SW                                                                                                                                   |
| read                         | r      | Register is written by HW (register between input and output -> one cycle delay) | Value written by software is ignored by hardware; that is, software may write any value to this field without affecting hardware behavior (= Target for development.) |
| write                        | w      |                                                                                  | Register is writable by SW                                                                                                                                            |
| read/write hardware affected | rwh    | Register can be modified by HW                                                   | Register can be modified by HW, but the priority SW versus HW has to be specified                                                                                     |
|                              | rwv    |                                                                                  |                                                                                                                                                                       |

**Registers Description**
**Table 20 Registers Access Types (cont'd)**

| Mode                          | Symbol | Description Hardware (HW)                                                                                       | Description Software (SW)                                                                                                |
|-------------------------------|--------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Read only                     | ro     | Register is set by HW (register between input and output -> one cycle delay)                                    | SW can only read this register                                                                                           |
| Read virtual                  | rv     | Physically, there is no new register, the input of the signal is connected directly to the address multiplexer. | SW can only read this register                                                                                           |
| Latch high, self clearing     | lhsc   | Latch high signal at high level, clear on read                                                                  | SW can read the register                                                                                                 |
| Latch low, self clearing      | llsc   | Latch high signal at low-level, clear on read                                                                   | SW can read the register                                                                                                 |
| Latch high, mask clearing     | lhmk   | Latch high signal at high level, register cleared with written mask                                             | SW can read the register, with write mask the register can be cleared (1 clears)                                         |
| Latch low, mask clearing      | llmk   | Latch high signal at low-level, register cleared on read                                                        | SW can read the register, with write mask the register can be cleared (1 clears)                                         |
| Interrupt high, self clearing | ihsc   | Differentiate the input signal (low->high) register cleared on read                                             | SW can read the register                                                                                                 |
| Interrupt low, self clearing  | ilsc   | Differentiate the input signal (high->low) register cleared on read                                             | SW can read the register                                                                                                 |
| Interrupt high, mask clearing | ihmk   | Differentiate the input signal (high->low) register cleared with written mask                                   | SW can read the register, with write mask the register can be cleared                                                    |
| Interrupt low, mask clearing  | ilmk   | Differentiate the input signal (low->high) register cleared with written mask                                   | SW can read the register, with write mask the register can be cleared                                                    |
| Interrupt enable register     | ien    | Enables the interrupt source for interrupt generation                                                           | SW can read and write this register                                                                                      |
| latch_on_reset                | lor    | rw register, value is latched after first clock cycle after reset                                               | Register is read and writable by SW                                                                                      |
| Read/write self clearing      | rWSC   | Register is used as input for the hw, the register will be cleared due to a HW mechanism.                       | Writing to the register generates a strobe signal for the HW (1 pdi clock cycle)<br>Register is read and writable by SW. |

**Table 21 Registers Clock Domains**

| Clock Short Name | Description |
|------------------|-------------|
|                  |             |

## 4.1 Register Description

**Registers Description**
**Control Register**

|                         |                       |                         |
|-------------------------|-----------------------|-------------------------|
| <b>CR</b>               | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>Control Register</b> | <b>00<sub>H</sub></b> | <b>3000<sub>H</sub></b> |

|            |             |            |             |            |            |            |             |           |            |            |   |   |   |   |   |
|------------|-------------|------------|-------------|------------|------------|------------|-------------|-----------|------------|------------|---|---|---|---|---|
| 15         | 14          | 13         | 12          | 11         | 10         | 9          | 8           | 7         | 6          | 5          | 4 | 3 | 2 | 1 | 0 |
| <b>RST</b> | <b>LPBK</b> | <b>SSL</b> | <b>ANEN</b> | <b>PDN</b> | <b>ISO</b> | <b>RAN</b> | <b>DPLX</b> | <b>CT</b> | <b>SSM</b> | <b>Res</b> |   |   |   |   |   |
| rwsc       | rw          | rw         | rw          | rw         | rw         | rwsc       | rw          | rw        | ro         | ro         |   |   |   |   |   |

| Field | Bits | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------|------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RST   | 15   | rwsc | <b>RESET</b><br>Setting this bit initiates the software reset function that resets the selected port, except for the phase-locked loop circuit. It will re-latch in all hardware configuration pin values. The software reset process takes 25us to complete. This bit, which is self-clearing, returns a value of 1 until the reset process is complete.<br>0 <sub>B</sub> <b>RST_0</b> , Normal operation<br>1 <sub>B</sub> <b>RST_1</b> , PHY Reset                                             |
| LPBK  | 14   | rw   | <b>Back Enable</b><br>This bit controls the PHY loop back operation that isolates the network transmitter outputs (TXP and TXN) and routes the MII transmit data to the MII receive data path. This function should only be used when auto negotiation is disabled (bit12 = 0). The specific PHY (10Base-T or 100Base-X) used for this operation is determined by bits 12 and 13.<br>0 <sub>B</sub> <b>LPBK_0</b> , Disable Loop back mode<br>1 <sub>B</sub> <b>LPBK_1</b> , Enable loop back mode |
| SSL   | 13   | rw   | <b>Speed Selection LSB</b><br>SPEED_LSB<br>0.60.13<br>Link speed is selected by this bit or by auto negotiation if bit 12 of this register is set (in which case, the value of this bit is ignored).<br>00 <sub>B</sub> <b>10M</b> , 10 Mbit/s<br>01 <sub>B</sub> <b>100M</b> , 100 Mbit/s<br>10 <sub>B</sub> <b>1000M</b> , 1000 Mbit/s<br>11 <sub>B</sub> <b>Res</b> , Reserved                                                                                                                  |
| ANEN  | 12   | rw   | <b>Auto Negotiation Enable</b><br>This bit determines whether the link speed should set up by the auto negotiation process or not. It is set at power up or reset if the PI_RECANEN pin detects a logic 1 input level in Twisted-Pair Mode.<br>0 <sub>B</sub> <b>ANEN_0</b> , Disable Auto negotiation process<br>1 <sub>B</sub> <b>ANEN_1</b> , Enable auto negotiation process                                                                                                                   |

**Registers Description**

| Field | Bits | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------|------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PDN   | 11   | rw   | <b>Power Down Enable</b><br>Ored result with PI_PWRDN pin. Setting this bit high or asserting the PI_PWRDN puts the PHY841F into power down mode. During the power down mode, TXP/TXN and all LED outputs are tristated and the MII/RMII interfaces are isolated.<br>0 <sub>B</sub> <b>PDN_0</b> , Normal Operation<br>1 <sub>B</sub> <b>PDN_1</b> , Power Down                                                                                         |
| ISO   | 10   | rw   | <b>Isolate PHY841F from Network</b><br>Setting this control bit isolates the part from the RMII/MII, with the exception of the serial management interface. When this bit is asserted, the PHY841F does not respond to TXD, TXEN and TXER inputs, and it presents a high impedance on its TXC, RXC, CRSDV, RXER, RXD, COL and CRS outputs.<br>0 <sub>B</sub> <b>ISO_0</b> , Normal Operation<br>1 <sub>B</sub> <b>ISO_1</b> , Isolate PHY from MII/RMII |
| RAN   | 9    | rwsc | <b>Restart Auto Negotiation</b><br>ANEN_RST. Setting this bit while auto negotiation is enabled forces a new auto negotiation process to start. This bit is self-clearing and returns to 0 after the auto negotiation process has commenced.<br>0 <sub>B</sub> <b>RAN_0</b> , Normal Operation<br>1 <sub>B</sub> <b>RAN_1</b> , Restart Auto Negotiation Process                                                                                        |
| DPLX  | 8    | rw   | <b>Duplex Mode</b><br>If auto negotiation is disabled, this bit determines the duplex mode for the link.<br>0 <sub>B</sub> <b>DPLX_0</b> , Half Duplex mode<br>1 <sub>B</sub> <b>DPLX_1</b> , Full Duplex mode                                                                                                                                                                                                                                          |
| CT    | 7    | rw   | <b>Collision Test</b><br>When set, this bit will cause the COL signal of MII interface to be asserted in response to the assertion of TXEN.<br>0 <sub>B</sub> <b>CT_0</b> , Disable COL signal test<br>1 <sub>B</sub> <b>CT_1</b> , Enable COL signal test                                                                                                                                                                                              |
| SSM   | 6    | ro   | <b>Speed Selection MSB</b><br>SPEED_MSB. Set to 0 all the time indicate that the PHY841F does not support 1000 Mbit/s function.                                                                                                                                                                                                                                                                                                                         |
| Res   | 5:0  | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                                                                                                                                                                                                                       |

**Registers Description**
**Status Register**

| SR              |     |     |    |    |    | Offset          |   | Reset Value       |      |      |     |      |        |        |      |
|-----------------|-----|-----|----|----|----|-----------------|---|-------------------|------|------|-----|------|--------|--------|------|
| Status Register |     |     |    |    |    | 01 <sub>H</sub> |   | 7849 <sub>H</sub> |      |      |     |      |        |        |      |
| 15              | 14  | 13  | 12 | 11 | 10 | 9               | 8 | 7                 | 6    | 5    | 4   | 3    | 2      | 1      | 0    |
| T4              | TXF | TXH | TF | TH | T2 | Res             |   |                   | SUPR | AN_C | RFD | ANEG | LINK   | JAB    | XTND |
| ro              | ro  | ro  | ro | ro | ro | ro              |   |                   | ro   | ro   | ro  | ro   | ro, ll | ro, lh | ro   |

**Registers Description**


| Field | Bits | Type | Description                                                                                                                                                                                                                                                                                                                                                |
|-------|------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| T4    | 15   | ro   | <b>100Base-T4 Capable</b><br>Set to 0 all the time to indicate that the PHY841F does not support 100Base-T4.                                                                                                                                                                                                                                               |
| TXF   | 14   |      | <b>100Base-X Full Duplex Capable</b><br>Set to 1 all the time to indicate that the PHY841F does support Full Duplex mode.                                                                                                                                                                                                                                  |
| TXH   | 13   |      | <b>100Base-X Half Duplex Capable</b><br>Set to 1 all the time to indicate that the PHY841F does support Half Duplex mode                                                                                                                                                                                                                                   |
| TF    | 12   |      | <b>10M Full Duplex Capable</b><br>TP: Set to 1 all the time to indicate that the PHY841F does support 10M Full Duplex mode.<br>FX: Set to 0 all the time to indicate that the PHY841F does not support 10M Full Duplex mode                                                                                                                                |
| TH    | 11   |      | <b>10M Half Duplex Capable</b><br>TP: Set to 1 all the time to indicate that the PHY841F does support 10M Half Duplex mode.<br>FX: Set to 0 all the time to indicate that the PHY841F does not support 10M Half Duplex mode                                                                                                                                |
| T2    | 10   |      | <b>100Base-T2 Capable</b><br>Set to 0 all the time to indicate that the PHY841F does not support 100Base-T2.                                                                                                                                                                                                                                               |
| Res   | 9:7  |      | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                                                                                                                          |
| SUPR  | 6    |      | <b>MF Preamble Suppression Capable</b><br>This bit is hardwired to 1 indicating that the PHY841F accepts management frame without preamble. Minimum 32 preamble bits are required following power-on or hardware reset. One idle bit is required between any two management transactions as per IEEE 802.3u specification.                                 |
| AN_C  | 5    |      | <b>Auto Negotiation Complete</b><br>If auto negotiation is enabled, this bit indicates whether the auto negotiation process has been completed or not.<br>Set to 0 all the time when Fiber Mode is selected.<br>0 <sub>B</sub> <b>AN_C_0</b> , Auto Negotiation process not completed<br>1 <sub>B</sub> <b>AN_C_1</b> , Auto Negotiation process completed |

**Registers Description**

| Field | Bits | Type     | Description                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------|------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RFD   | 4    | ro       | <b>Remote Fault Detect</b><br>This bit is latched to 1 if the RF bit in the auto negotiation link partner ability register (bit 13, register address 05h) is set or the receive channel meets the far end fault indication function criteria. It is unlatched when this register is read.<br>0 <sub>B</sub> <b>RFD_0</b> , Remote Fault not detected<br>1 <sub>B</sub> <b>RFD_1</b> , Remote Fault detected |
| ANEG  | 3    |          | <b>Auto Negotiation Ability</b><br>TP: This bit is set to 1 all the time, indicating that PHY841F is capable of auto negotiation.<br>FX: This bit is set to 0 all the time, indicating that PHY841F is not capable of auto negotiation in Fiber Mode.<br>0 <sub>B</sub> <b>ANEG_0</b> , Not capable of auto negotiation<br>1 <sub>B</sub> <b>ANEG_1</b> , Capable of auto negotiation                       |
| LINK  | 2    | ro, llsc | <b>Link Status</b><br>This bit reflects the current state of the link -test-fail state machine. Loss of a valid link causes a 0 latched into this bit. It remains 0 until this register is read by the serial management interface. Whenever Linkup, this bit should be read twice to get link up status<br>0 <sub>B</sub> <b>LINK_0</b> , Link is down<br>1 <sub>B</sub> <b>LINK_1</b> , Link is up        |
| JAB   | 1    | ro, lhsc | <b>Jabber Detect</b><br>0 <sub>B</sub> <b>JAB_0</b> , Jabber condition not detected<br>1 <sub>B</sub> <b>JAB_1</b> , Jabber condition detected                                                                                                                                                                                                                                                              |
| XTND  | 0    | ro       | <b>Extended Capability</b><br>This bit defaults to 1, indicating that the PHY841F implements extended registers.<br>0 <sub>B</sub> <b>XTND_0</b> , No extended register set<br>1 <sub>B</sub> <b>XTND_1</b> , Extended register set                                                                                                                                                                         |

**Registers Description**
**PHY Identifier**


|                                  |                       |                         |
|----------------------------------|-----------------------|-------------------------|
| <b>PHY_IR0</b>                   | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>PHY Identifier Register 0</b> | <b>02<sub>H</sub></b> | <b>002E<sub>H</sub></b> |

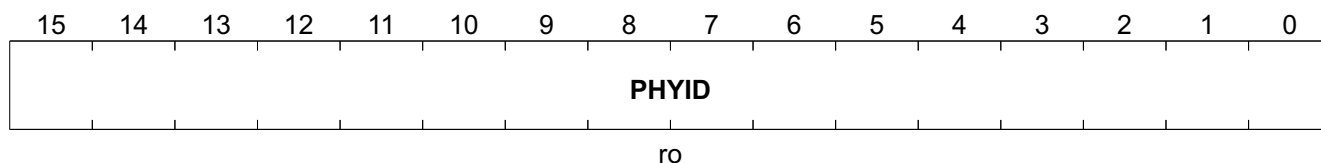

| Field | Bits | Type | Description                   |
|-------|------|------|-------------------------------|
| PHYID | 15:0 | ro   | <b>PHY-ID</b><br>IEEE Address |

**PHY Identifier Register 1**

|                                  |                       |                         |
|----------------------------------|-----------------------|-------------------------|
| <b>PHY_IR1</b>                   | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>PHY Identifier Register 1</b> | <b>03<sub>H</sub></b> | <b>CC62<sub>H</sub></b> |

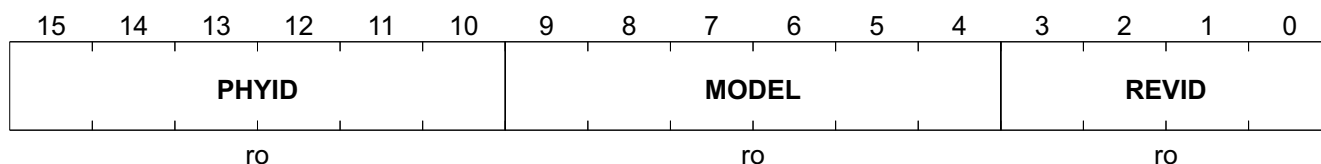

| Field | Bits  | Type | Description                                           |
|-------|-------|------|-------------------------------------------------------|
| PHYID | 15:10 | ro   | <b>PHY-ID 15:0</b><br>IEEE Address/Model No./Rev. No. |
| MODEL | 9:4   |      | <b>MODEL 5:0</b><br>ADMTEK PHY Revision ID.           |
| REVID | 3:0   |      | <b>REV-ID 3:0</b><br>ADMTEK PHY Revision ID.          |

**Advertisement**

|                                                |                       |                         |
|------------------------------------------------|-----------------------|-------------------------|
| <b>Advertisement</b>                           | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>Auto Negotiation Advertisement Register</b> | <b>04<sub>H</sub></b> | <b>01E1<sub>H</sub></b> |

|           |     |           |     |            |            |           |            |            |           |           |            |   |   |   |   |
|-----------|-----|-----------|-----|------------|------------|-----------|------------|------------|-----------|-----------|------------|---|---|---|---|
| 15        | 14  | 13        | 12  | 11         | 10         | 9         | 8          | 7          | 6         | 5         | 4          | 3 | 2 | 1 | 0 |
| <b>NP</b> | Res | <b>RF</b> | Res | <b>APD</b> | <b>PSE</b> | <b>T4</b> | <b>TXF</b> | <b>TXD</b> | <b>TF</b> | <b>TD</b> | <b>Sel</b> |   |   |   |   |
| rw        | ro  | rw        | ro  | rw         | rw         | ro        | rw         | rw         | rw        | rw        | ro         |   |   |   |   |

| Field | Bits | Type | Description                                                                                                                                                                                                                                                                                                         |
|-------|------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NP    | 15   | rw   | <b>Next Page</b><br>This bit is defaults to 1, indicating that PHY841F is next page capable.                                                                                                                                                                                                                        |
| Res   | 14   | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                                                                                   |
| RF    | 13   | rw   | <b>Remote Fault</b><br>This bit is written by serial management interface for the purpose of communicating the remote fault condition to the auto negotiation link partner.<br>0 <sub>B</sub> <b>NRFD</b> , No remote fault has been detected<br>1 <sub>B</sub> <b>RFD</b> , Remote Fault has been detected         |
| Res   | 12   | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                                                                                   |
| APD   | 11   | rw   | <b>Asymmetric Pause Direction</b><br>Bit[11:10] Capability<br>00 <sub>B</sub> <b>NP</b> , No Pause<br>01 <sub>B</sub> <b>SP</b> , Symmetric PAUSE<br>10 <sub>B</sub> <b>AP</b> , Asymmetric PAUSE toward Link Partner<br>11 <sub>B</sub> <b>BSP</b> , Both Symmetric PAUSE and Asymmetric PAUSE toward local device |
| PSE   | 10   | rw   | <b>Pause Operation for Full Duplex</b><br>Value on PAUREC will be stored in this bit during power on reset.                                                                                                                                                                                                         |
| T4    | 9    | ro   | <b>Technology Ability for 100Base-T4</b><br>Defaults to 0.                                                                                                                                                                                                                                                          |

**Registers Description**

| Field | Bits | Type | Description                                                                                                                                                  |
|-------|------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TXF   | 8    | rw   | <b>100Base-TX Full Duplex</b><br>$0_B$ <b>NCFDO</b> , Not capable of 100M Full duplex operation<br>$1_B$ <b>CFDO</b> , Capable of 100M Full duplex operation |
| TXD   | 7    |      | <b>100Base-TX Half Duplex</b><br>$0_B$ <b>TXD_0</b> , Not capable of 100M operation<br>$1_B$ <b>TXD_1</b> , Capable of 100M operation                        |
| TF    | 6    |      | <b>10Base-T Full Duplex</b><br>$0_B$ <b>TF_0</b> , Not capable of 10M full duplex operation<br>$1_B$ <b>TF_1</b> , Capable of 10M Full Duplex operation      |
| TD    | 5    |      | <b>10Base-T Half Duplex</b><br>$0_B$ <b>TD_0</b> , Not capable of 10M operation<br>$1_B$ <b>TD_1</b> , Capable of 10M operation                              |
| Sel   | 4:0  | ro   | <b>Selector Field</b><br>These 5 bits are hardwired to $00001_B$ , indicating that the PHY841F supports IEEE 802.3 CSMA/CD.                                  |

**Auto Negotiation Link Partner Ability**

|                                              |                       |                         |
|----------------------------------------------|-----------------------|-------------------------|
| <b>ANLPA</b>                                 | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>Auto Negotiation Link Partner Ability</b> | <b>05<sub>H</sub></b> | <b>01E1<sub>H</sub></b> |

|            |            |           |     |             |            |             |            |            |           |           |   |   |            |   |   |
|------------|------------|-----------|-----|-------------|------------|-------------|------------|------------|-----------|-----------|---|---|------------|---|---|
| 15         | 14         | 13        | 12  | 11          | 10         | 9           | 8          | 7          | 6         | 5         | 4 | 3 | 2          | 1 | 0 |
| <b>NPG</b> | <b>ACK</b> | <b>RF</b> | Res | <b>LPAP</b> | <b>LPP</b> | <b>LPTA</b> | <b>TXF</b> | <b>TXD</b> | <b>TF</b> | <b>TD</b> |   |   | <b>Sel</b> |   |   |
| ro         | ro         | ro        | ro  | ro          | ro         | ro          | ro         | ro         | ro        | ro        |   |   | ro         |   |   |

**Registers Description**

| Field | Bits | Type | Description                                                                                                                                                                     |
|-------|------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NPG   | 15   | ro   | <b>Next Page</b><br>0 <sub>B</sub> <b>NPG_0</b> , Not capable of next page function<br>1 <sub>B</sub> <b>NPG_1</b> , Capable of next page function                              |
| ACK   | 14   |      | <b>Acknowledge</b><br>0 <sub>B</sub> <b>ACK_0</b> , Not acknowledged<br>1 <sub>B</sub> <b>ACK_1</b> , Link Partner acknowledges reception of the ability data word              |
| RF    | 13   |      | <b>Remote Fault</b><br>0 <sub>B</sub> <b>RF_0</b> , No remote fault has been detected<br>1 <sub>B</sub> <b>RF_1</b> , Remote Fault has been detected                            |
| Res   | 12   |      | <b>Reserved</b><br>Not Applicable                                                                                                                                               |
| LPAP  | 11   |      | <b>Link Partner Asymmetric Pause Direction</b>                                                                                                                                  |
| LPP   | 10   |      | <b>Link Partner Pause Capability</b><br>Value on PAUREC will be stored in this bit during power on reset.                                                                       |
| LPTA  | 9    |      | <b>Link Partner Technology Ability for 100Base-T4</b><br>Defaults to 0.                                                                                                         |
| TXF   | 8    |      | <b>100Base-TX Full Duplex</b><br>0 <sub>B</sub> <b>TXF_0</b> , Not capable of 100M Full duplex operation<br>1 <sub>B</sub> <b>TXF_1</b> , Capable of 100M Full duplex operation |
| TXD   | 7    |      | <b>100Base-TX Half Duplex</b><br>1 <sub>B</sub> <b>TXD_1</b> , Capable of 100M operation<br>0 <sub>B</sub> <b>TXD_2</b> , Not capable of 100M operation                         |
| TF    | 6    |      | <b>10Base-T Full Duplex</b><br>1 <sub>B</sub> <b>TF_1</b> , Capable of 10M Full Duplex operation<br>0 <sub>B</sub> <b>TF_0</b> , Not capable of 10M full duplex operation       |
| TD    | 5    |      | <b>10Base-T Half Duplex</b><br>1 <sub>B</sub> <b>TD_1</b> , Capable of 10M operation<br>0 <sub>B</sub> <b>TD_0</b> , Not capable of 10M operation                               |
| Sel   | 4:0  |      | <b>Encoding Definitions</b>                                                                                                                                                     |

**Auto Negotiation Expansion Register**


|                                            |                       |                         |
|--------------------------------------------|-----------------------|-------------------------|
| <b>ANER</b>                                | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>Auto Negotiation Expansion Register</b> | <b>06<sub>H</sub></b> | <b>0000<sub>H</sub></b> |

|     |    |    |    |    |    |   |   |   |   |   |        |      |      |        |      |
|-----|----|----|----|----|----|---|---|---|---|---|--------|------|------|--------|------|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4      | 3    | 2    | 1      | 0    |
| Res |    |    |    |    |    |   |   |   |   |   | PFLT   | LPNP | NXPG | PRCV   | LPAN |
| ro  |    |    |    |    |    |   |   |   |   |   | ro, lh | ro   | ro   | ro, lh | ro   |

**Registers Description**

| Field | Bits | Type     | Description                                                                                                                                                                       |
|-------|------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Res   | 15:5 | ro       | <b>Reserved</b><br>Not Applicable                                                                                                                                                 |
| PFLT  | 4    | ro, lhsc | <b>Parallel Detection Fault</b><br>0 <sub>B</sub> <b>PFLT_0</b> , No Fault Detect<br>1 <sub>B</sub> <b>PFLT_1</b> , Fault has been detected                                       |
| LPNP  | 3    | ro       | <b>Link Partner Next Page Able</b><br>0 <sub>B</sub> <b>LPNP_0</b> , Link Partner is not next page capable<br>1 <sub>B</sub> <b>LPNP_1</b> , Link Partner is next page capable    |
| NXPG  | 2    |          | <b>Next Page Able</b><br>1 <sub>B</sub> <b>NXPG_1</b> , Next page Enable.<br>0 <sub>B</sub> <b>NXPG_0</b> , Next page Disable                                                     |
| PRCV  | 1    | ro, lhsc | <b>Page Received</b><br>0 <sub>B</sub> <b>PRCV_0</b> , No new page has been received<br>1 <sub>B</sub> <b>PRCV_1</b> , A new page has been received                               |
| LPAN  | 0    | ro       | <b>Link Partner Auto Negotiation Able</b><br>0 <sub>B</sub> <b>LPAN_0</b> , Link Partner is not auto negotiable<br>1 <sub>B</sub> <b>LPAN_1</b> , Link Partner is auto negotiable |

**Reserved 0**
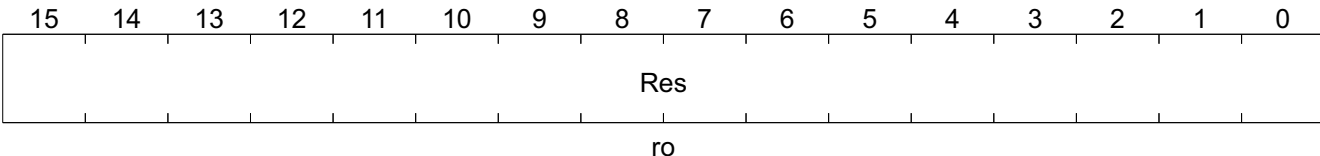
| Res0                                                                                 | Offset                | Reset Value                 |
|--------------------------------------------------------------------------------------|-----------------------|-----------------------------|
| <b>Reserved 0</b>                                                                    | <b>07<sub>H</sub></b> | <b>Reserved<sub>H</sub></b> |
|  |                       |                             |

| Field | Bits | Type | Description                       |
|-------|------|------|-----------------------------------|
| Res   | 15:0 | ro   | <b>Reserved</b><br>Not Applicable |

**Table 22 Reserved Registers**

| Register Short Name | Register Long Name | Offset Address  |
|---------------------|--------------------|-----------------|
| Res1                | Reserved 1         | 08 <sub>H</sub> |
| Res2                | Reserved 2         | 09 <sub>H</sub> |
| Res3                | Reserved 3         | 0A <sub>H</sub> |
| Res4                | Reserved 4         | 0B <sub>H</sub> |
| Res5                | Reserved 5         | 0C <sub>H</sub> |
| Res6                | Reserved 6         | 0D <sub>H</sub> |

**Registers Description**
**Table 22**    **Reserved Registers** (cont'd)

| Register Short Name | Register Long Name | Offset Address  |
|---------------------|--------------------|-----------------|
| Res7                | Reserved 7         | 0E <sub>H</sub> |
| Res8                | Reserved 8         | 0F <sub>H</sub> |
| Res9                | Reserved 9         | 15 <sub>H</sub> |
| Res10               | Reserved 10        | 1A <sub>H</sub> |
| Res11               | Reserved 11        | 1B <sub>H</sub> |
| Res12               | Reserved 12        | 1C <sub>H</sub> |
| Res 13              | Reserved 13        | 1E <sub>H</sub> |

**Generic PHY Control/Configuration Register**

*Note: PHY Control/Configuration Registers start from address 16 to 21.*

| GPCR                                       | Offset          | Reset Value       |
|--------------------------------------------|-----------------|-------------------|
| Generic PHY Control/Configuration Register | 10 <sub>H</sub> | 1000 <sub>H</sub> |

|              |              |     |            |             |     |              |     |            |             |    |    |    |    |    |    |
|--------------|--------------|-----|------------|-------------|-----|--------------|-----|------------|-------------|----|----|----|----|----|----|
| 15           | 14           | 13  | 12         | 11          | 10  | 9            | 8   | 7          | 6           | 5  | 4  | 3  | 2  | 1  | 0  |
| <b>IFSEL</b> | <b>LBKMD</b> | Res | <b>FLT</b> | <b>Conv</b> | Res | <b>XOVEN</b> | Res | <b>En8</b> | <b>DPMG</b> |    |    |    |    |    |    |
| ro           | rw           | ro  | rw         | rw          | ro  | rw           | rw  | rw         | rw          | rw | rw | rw | rw | rw | rw |

| Field | Bits  | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------|-------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IFSEL | 15:14 | ro   | <b>Interface Select.</b><br>Value on RMII_EN and GPSI will be stored in IFSEL[1] and IFSEL[0], respectively<br>00 <sub>B</sub> , MII<br>01 <sub>B</sub> , GPSI<br>1x <sub>B</sub> , RMII                                                                                                                                                                                                                                                                                                                              |
| LBKMD | 13:12 | rw   | <b>Loop Back Mode Select.</b><br>When 0.14 LPBK is set to 1, these two bits are set to 01 by default. Value on these two bits can be modified through MDC/MDIO. When 0.14 LPBK is set to 0, these two bits are reset to 00 and can't be updated by MDC/MDIO.<br><i>Note: Both 10M and 100M loopback should be covered by AD2106.</i><br>00 <sub>B</sub> , Disable Loop back<br>01 <sub>B</sub> , PCS Layer Loop back mode<br>10 <sub>B</sub> , PMA Layer Loop back mode<br>11 <sub>B</sub> , PMD layer loop back mode |
| Res   | 11:10 | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| FLT   | 9     | rw   | <b>Enable called output remote fault status</b><br>0 <sub>B</sub> <b>FLT_0</b> , Disable.<br>1 <sub>B</sub> <b>FLT_1</b> , Enable.                                                                                                                                                                                                                                                                                                                                                                                    |

**Registers Description**

| Field | Bits | Type | Description                                                                                                                                                                                 |
|-------|------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conv  | 8    | rw   | <b>Converter mode (only valid in rmii mode)</b><br>0 <sub>B</sub> <b>Conv_0</b> , Normal Mode<br>1 <sub>B</sub> <b>Conv_1</b> , converter mode                                              |
| Res   | 7:5  | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                           |
| XOVEN | 4    | rw   | <b>Cross Over Auto Detect Enable</b><br>0 <sub>B</sub> <b>XOVEN_0</b> , Disable.<br>1 <sub>B</sub> <b>XOVEN_1</b> , Enable.                                                                 |
| Res   | 3:2  | rw   | <b>ADMtek reserved bits.</b><br>Writing value other than 0 to these two bits may cause abnormal operation.                                                                                  |
| En8   | 1    | rw   | <b>Enable Register 8 to Store Next Page Information.</b><br>0 <sub>B</sub> <b>En8_0</b> , Store Next Page in Register 5.<br>1 <sub>B</sub> <b>En8_1</b> , Store Next Page in Register 8     |
| DPMG  | 0    | rw   | <b>Disable Power Management Feature</b><br>0 <sub>B</sub> <b>DPMG_0</b> , Enable. Enable Medium Detect Function.<br>1 <sub>B</sub> <b>DPMG_1</b> , Disable. Medium_On is high all the time. |



**Registers Description**

| Field | Bits  | Type | Description                                                                                                                                                                                                                          |
|-------|-------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SMS   | 14    | rw   | <b>10BASE-T Serial Mode Select.</b><br>Only available when AD2106 works in 10M mode.<br>0 <sub>B</sub> <b>SMS_0</b> , 10M MII or RMII mode (According to RMII_EN)<br>1 <sub>B</sub> <b>SMS_1</b> , 10M Serial Mode (Seven Wire Mode) |
| Res   | 13    |      | <b>ADMtek reserved bits.</b><br>Writing value other than 1 to this bit may cause abnormal operation.                                                                                                                                 |
| Res   | 12:11 |      | <b>ADMtek reserved bits.</b><br>Writing value other than 0 to these two bits may cause abnormal operation.                                                                                                                           |
| ITCE  | 10    |      | <b>Polarity Interval Timer Check Enable.</b><br>0 <sub>B</sub> <b>ITCE_0</b> , Disable<br>1 <sub>B</sub> <b>ITCE_1</b> , Enable                                                                                                      |
| Res   | 9     |      | <b>ADMtek reserved bits.</b><br>Writing value other than 1 to this bit may cause abnormal operation.                                                                                                                                 |
| Res   | 8:6   |      | <b>ADMtek reserved bits.</b><br>Writing value other than 5 to these three bits may cause abnormal operation.                                                                                                                         |
| Res   | 5     |      | <b>ADMtek reserved bits.</b><br>Writing value other than 1 to this bit may cause abnormal operation.                                                                                                                                 |
| APD   | 4     |      | <b>Auto Polarity Disable</b><br>0 <sub>B</sub> <b>APD_0</b> , Normal<br>1 <sub>B</sub> <b>APD_1</b> , Disable                                                                                                                        |
| RJM   | 3     |      | <b>Enable Receive Jabber Monitor</b><br>0 <sub>B</sub> <b>RJM_0</b> , Disable<br>1 <sub>B</sub> <b>RJM_1</b> , Enable                                                                                                                |
| TJD   | 2     |      | <b>Disable Transmit Jabber</b><br>0 <sub>B</sub> <b>TJD_0</b> , Enable Transmit Jabber Function<br>1 <sub>B</sub> <b>TJD_1</b> , Disable Transmit Jabber Function                                                                    |
| NTH   | 1     |      | <b>Normal Threshold</b><br>0 <sub>B</sub> <b>NTH_0</b> , Lower 10BASE-T Receive threshold<br>1 <sub>B</sub> <b>NTH_1</b> , Normal 10BASE-T Receive threshold                                                                         |
| FRL   | 0     |      | <b>Force 10M Receive Good Link.</b><br>0 <sub>B</sub> <b>FRL_0</b> , Normal Operation<br>1 <sub>B</sub> <b>FRL_1</b> , Force Good Link                                                                                               |

**PHY 100M Module Control Register**

|                                         |                       |                         |
|-----------------------------------------|-----------------------|-------------------------|
| <b>P100_MCR</b>                         | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>PHY 100M Module Control Register</b> | <b>12<sub>H</sub></b> | <b>0022<sub>H</sub></b> |

|     |    |    |    |     |    |     |   |              |     |   |            |             |            |            |     |
|-----|----|----|----|-----|----|-----|---|--------------|-----|---|------------|-------------|------------|------------|-----|
| 15  | 14 | 13 | 12 | 11  | 10 | 9   | 8 | 7            | 6   | 5 | 4          | 3           | 2          | 1          | 0   |
| Res |    |    |    | Res |    | Res |   | <b>FxSel</b> | Res |   | <b>SCR</b> | <b>FEFI</b> | <b>CLE</b> | <b>IAC</b> | Res |
| ro  |    |    |    | rw  |    | rw  |   | rw           | rw  |   | rw         | rw          | ro         | rw         | rw  |

| Field | Bits  | Type | Description                                                                                                                                                                                                                                                                                                      |
|-------|-------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Res   | 15:12 | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                                                                                |
| Res   | 11:10 | rw   | <b>ADMtek reserved bits.</b><br>Writing value other than 0 to these two bits may cause abnormal operation.                                                                                                                                                                                                       |
| Res   | 9:8   |      | <b>ADMtek reserved bits.</b><br>Writing value other than 0 to these two bits may cause abnormal operation.                                                                                                                                                                                                       |
| FxSel | 7     |      | <b>Fiber Select.</b><br>0 <sub>B</sub> <b>SelfX_0</b> , TP Mode<br>1 <sub>B</sub> <b>SelfX_1</b> , Fiber Mode                                                                                                                                                                                                    |
| Res   | 6:5   |      | <b>ADMtek reserved bits.</b><br>Writing value other than 0 to these two bits may cause abnormal operation.                                                                                                                                                                                                       |
| SCR   | 4     |      | <b>Disable Scrambler</b><br>When set to fiber mode, this bit will be forced to 1 automatically. Write 0 to this bit in Fiber Mode has no effect.<br>0 <sub>B</sub> <b>SCR_0</b> , Enable<br>1 <sub>B</sub> <b>SCR_1</b> , Disable                                                                                |
| FEFI  | 3     |      | <b>Enable FEFI</b><br>0 <sub>B</sub> <b>FEFI_0</b> , Disable<br>1 <sub>B</sub> <b>FEFI_1</b> , Enable                                                                                                                                                                                                            |
| CLE   | 2     | ro   | <b>Disable cable length led indication</b><br>When this bit is set to 0, SPDLED, COLLED and LNKACTLED are used to represent twisted pair cable length. See SPDLED description for more detail<br>0 <sub>B</sub> <b>CLE_0</b> , Enable cable length led<br>1 <sub>B</sub> <b>CLE_1</b> , Disable cable length led |
| IAC   | 1     | rw   | <b>Interrupt active value control</b><br>0 <sub>B</sub> <b>IAC_0</b> , Active low<br>1 <sub>B</sub> <b>IAC_1</b> , Active high                                                                                                                                                                                   |
| Res   | 0     |      | <b>ADMtek reserved bits.</b><br>Writing value other than 0 to this bit may cause abnormal operation.                                                                                                                                                                                                             |

**Registers Description**
**LED Configuration Register**

|                                   |                       |                         |
|-----------------------------------|-----------------------|-------------------------|
| <b>LCR</b>                        | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>LED Configuration Register</b> | <b>13<sub>H</sub></b> | <b>0A34<sub>H</sub></b> |

|     |    |    |    |         |    |   |   |         |   |   |   |         |   |   |   |
|-----|----|----|----|---------|----|---|---|---------|---|---|---|---------|---|---|---|
| 15  | 14 | 13 | 12 | 11      | 10 | 9 | 8 | 7       | 6 | 5 | 4 | 3       | 2 | 1 | 0 |
| Res |    |    |    | LNKCTRL |    |   |   | COLCTRL |   |   |   | SPDCTRL |   |   |   |
| ro  |    |    |    | ro      |    |   |   | ro      |   |   |   | ro      |   |   |   |

| Field   | Bits  | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|-------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Res     | 15:12 | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| LNKCTRL | 11:8  | ro   | <b>Link/Act LED Control</b><br>0000 <sub>B</sub> , Collision<br>0001 <sub>B</sub> , All Errors<br>0010 <sub>B</sub> , Duplex<br>0011 <sub>B</sub> , Duplex/Collision<br>0100 <sub>B</sub> , Speed<br>0101 <sub>B</sub> , Link<br>0110 <sub>B</sub> , Transmit Activity<br>0111 <sub>B</sub> , Receive Activity<br>1000 <sub>B</sub> , TX/RX Activity<br>1001 <sub>B</sub> , Link/Receive Activity<br>1010 <sub>B</sub> , Link and TX/RX Activity<br>1011 <sub>B</sub> , 100M False Carrier Error/10M Receive Jabber<br>1100 <sub>B</sub> , 100M Error End of Stream/10M Transmit Jabber<br>1101 <sub>B</sub> , Reserved<br>1110 <sub>B</sub> , Distance (See LED Description for more detail)  |
| COLCTRL | 7:4   | ro   | <b>COLLISION LED Control</b><br>0000 <sub>B</sub> , Collision<br>0001 <sub>B</sub> , All Errors<br>0010 <sub>B</sub> , Duplex<br>0011 <sub>B</sub> , Duplex/Collision<br>0100 <sub>B</sub> , Speed<br>0101 <sub>B</sub> , Link<br>0110 <sub>B</sub> , Transmit Activity<br>0111 <sub>B</sub> , Receive Activity<br>1000 <sub>B</sub> , TX/RX Activity<br>1001 <sub>B</sub> , Link/Receive Activity<br>1010 <sub>B</sub> , Link and TX/RX Activity<br>1011 <sub>B</sub> , 100M False Carrier Error/10M Receive Jabber<br>1100 <sub>B</sub> , 100M Error End of Stream/10M Transmit Jabber<br>1101 <sub>B</sub> , Reserved<br>1110 <sub>B</sub> , Distance (See LED Description for more detail) |

**Registers Description**

| Field   | Bits | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------|------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SPDCTRL | 3:0  | ro   | <b>Speed LED Control</b><br>0000 <sub>B</sub> , Collision<br>0001 <sub>B</sub> , All Errors<br>0010 <sub>B</sub> , Duplex<br>0011 <sub>B</sub> , Duplex/Collision<br>0100 <sub>B</sub> , Speed<br>0101 <sub>B</sub> , Link<br>0110 <sub>B</sub> , Transmit Activity<br>0111 <sub>B</sub> , Receive Activity<br>1000 <sub>B</sub> , TX/RX Activity<br>1001 <sub>B</sub> , Link/Receive Activity<br>1010 <sub>B</sub> , Link and TX/RX Activity<br>1011 <sub>B</sub> , 100M False Carrier Error/10M Receive Jabber<br>1100 <sub>B</sub> , 100M Error End of Stream/10M Transmit Jabber<br>1101 <sub>B</sub> , Reserved<br>1110 <sub>B</sub> , Distance (See LED Description for more detail) |

**Interrupt Enable Register**

|                                  |                       |                         |
|----------------------------------|-----------------------|-------------------------|
| <b>IER</b>                       | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>Interrupt Enable Register</b> | <b>14<sub>H</sub></b> | <b>03FF<sub>H</sub></b> |

|     |    |    |    |    |    |      |      |      |      |      |      |      |      |      |      |
|-----|----|----|----|----|----|------|------|------|------|------|------|------|------|------|------|
| 15  | 14 | 13 | 12 | 11 | 10 | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
| Res |    |    |    |    |    | XCHG | SCIE | DCIE | PRIE | LSCE | SEIE | FCAR | TJIE | RJIE | EESE |
| ro  |    |    |    |    |    | rw   | rw   | rw   | rw   | rw   | rw   | rw   | rw   | rw   | rw   |

| Field | Bits  | Type | Description                                                                                                                            |
|-------|-------|------|----------------------------------------------------------------------------------------------------------------------------------------|
| Res   | 15:10 | ro   | <b>Reserved</b><br>Not Applicable                                                                                                      |
| XCHG  | 9     | rw   | <b>Cross Over mode Changed Interrupt Enable</b><br>0 <sub>B</sub> XCHG_0, Interrupt Disable<br>1 <sub>B</sub> XCHG_1, Interrupt Enable |
| SCIE  | 8     |      | <b>Speed Changed Interrupt Enable</b><br>0 <sub>B</sub> SCIE_0, Interrupt Disable<br>1 <sub>B</sub> SCIE_1, Interrupt Enable           |
| DCIE  | 7     |      | <b>Duplex Changed Interrupt Enable</b><br>0 <sub>B</sub> DCIE_0, Interrupt Disable<br>1 <sub>B</sub> DCIE_1, Interrupt Enable          |
| PRIE  | 6     |      | <b>Page Received Interrupt Enable</b><br>0 <sub>B</sub> PRIE_0, Interrupt Disable<br>1 <sub>B</sub> PRIE_1, Interrupt Enable           |
| LSCE  | 5     |      | <b>Link Status Changed Interrupt Enable</b><br>0 <sub>B</sub> LSCE_0, Interrupt Disable<br>1 <sub>B</sub> LSCE_1, Interrupt Enable     |
| SEIE  | 4     |      | <b>Symbol Error Interrupt Enable</b><br>0 <sub>B</sub> SEIE_0, Interrupt Disable<br>1 <sub>B</sub> SEIE_1, Interrupt Enable            |
| FCAR  | 3     |      | <b>False Carrier Interrupt Enable</b><br>0 <sub>B</sub> FCAR_0, Interrupt Disable<br>1 <sub>B</sub> FCAR_1, Interrupt Enable           |
| TJIE  | 2     |      | <b>Transmit Jabber Interrupt Enable</b><br>0 <sub>B</sub> TJIE_0, Interrupt Disable<br>1 <sub>B</sub> TJIE_1, Interrupt Enable         |
| RJIE  | 1     |      | <b>Receive Jabber Interrupt Enable</b><br>0 <sub>B</sub> RJIE_0, Interrupt Disable<br>1 <sub>B</sub> RJIE_1, Interrupt Enable          |
| EESE  | 0     |      | <b>Error End of Stream Enable</b><br>0 <sub>B</sub> EESE_0, Interrupt Disable<br>1 <sub>B</sub> EESE_1, Interrupt Enable               |

**Registers Description**
**PHY Generic Status Register**

*Note: PHY Status Registers start from 22 to 28 (29 to 30 reserves for further use)*

|                                    |                       |                         |
|------------------------------------|-----------------------|-------------------------|
| <b>PGSR</b>                        | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>PHY Generic Status Register</b> | <b>16<sub>H</sub></b> | <b>0000<sub>H</sub></b> |

|     |    |     |    |    |    |      |       |       |   |   |   |   |   |   |   |
|-----|----|-----|----|----|----|------|-------|-------|---|---|---|---|---|---|---|
| 15  | 14 | 13  | 12 | 11 | 10 | 9    | 8     | 7     | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Res |    | Res |    |    | MD | FXEN | XOVER | CBLEN |   |   |   |   |   |   |   |
| ro  |    | ro  |    |    | ro | ro   | ro    | ro    |   |   |   |   |   |   |   |

| Field | Bits  | Type | Description                                                                                                                                                                                                                                            |
|-------|-------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Res   | 15:14 | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                      |
| Res   | 13:11 |      | <b>Reserved</b><br>Not Applicable                                                                                                                                                                                                                      |
| MD    | 10    |      | <b>Medium Detect</b><br>Real Time Status for Medium Detect Signal.<br>0 <sub>B</sub> <b>MD_0</b> , Medium_Detect Fail<br>1 <sub>B</sub> <b>MD_1</b> , Medium_Detect Pass                                                                               |
| FXEN  | 9     |      | <b>Fiber Enable</b><br>Only Changed when PHY Reset. OR'ed result of PI_SELFX and 17.9 (SELFX)<br>0 <sub>B</sub> <b>FXEN_0</b> , TX mode<br>1 <sub>B</sub> <b>FXEN_1</b> , FX mode                                                                      |
| XOVER | 8     |      | <b>Cross Over Status</b><br>0 <sub>B</sub> <b>XOVS_0</b> , MDI mode<br>1 <sub>B</sub> <b>XOVS_1</b> , MDIX mode                                                                                                                                        |
| CBLEN | 7:0   |      | <b>Cable Length.</b><br>Only valid for 100M<br>MSB is IC0<br>1a <sub>H</sub> , 40 meters<br>22 <sub>H</sub> , 60 meters<br>94 <sub>H</sub> , 80 meters<br>9a <sub>H</sub> , 100 meters<br>a2 <sub>H</sub> , 120 meters<br>ab <sub>H</sub> , 140 meters |

**PHY Specific Status Register**

|                                     |                       |                         |
|-------------------------------------|-----------------------|-------------------------|
| <b>PSSR</b>                         | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>PHY Specific Status Register</b> | <b>17<sub>H</sub></b> | <b>0060<sub>H</sub></b> |

|     |    |    |    |     |     |     |      |     |     |     |      |      |      |      |      |
|-----|----|----|----|-----|-----|-----|------|-----|-----|-----|------|------|------|------|------|
| 15  | 14 | 13 | 12 | 11  | 10  | 9   | 8    | 7   | 6   | 5   | 4    | 3    | 2    | 1    | 0    |
| Res |    |    |    | JRX | JTX | POL | POUT | PIN | DUP | SPD | LINK | RPAU | RDUP | RSPD | RANV |
| ro  |    |    |    | ro  | ro  | ro  | ro   | ro  | ro  | ro  | ro   | ro   | ro   | ro   | ro   |

| Field | Bits  | Type | Description                                                                                                                                                                                                    |
|-------|-------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Res   | 15:12 | ro   | <b>Reserved</b><br>Not Applicable                                                                                                                                                                              |
| JRX   | 11    |      | <b>Real Time 10M Receive Jabber Status</b><br>0 <sub>B</sub> <b>JRX_0</b> , No jabber<br>1 <sub>B</sub> <b>JRX_1</b> , Jabber                                                                                  |
| JTX   | 10    |      | <b>Real Time 10M Transmit Jabber Status</b><br>0 <sub>B</sub> <b>JTX_0</b> , No Jabber<br>1 <sub>B</sub> <b>JTX_1</b> , Jabber                                                                                 |
| POL   | 9     |      | <b>Polarity</b><br>Only available in 10M.<br>0 <sub>B</sub> <b>POL_0</b> , Normal Polarity<br>1 <sub>B</sub> <b>POL_1</b> , Polarity Reversed                                                                  |
| POUT  | 8     |      | <b>Pause Out Capability</b><br>Disabled when Half Duplex.<br>0 <sub>B</sub> <b>POUT_0</b> , Lack of Pause Out capability<br>1 <sub>B</sub> <b>POUT_1</b> , Has Pause Out capability                            |
| PIN   | 7     |      | <b>Pause In Capability</b><br>Disabled when Half Duplex.<br>0 <sub>B</sub> <b>PIN_0</b> , Has Pause In capability<br>1 <sub>B</sub> <b>PIN_1</b> , Lack of Pause In capability                                 |
| DUP   | 6     |      | <b>Operating Duplex</b><br>0 <sub>B</sub> <b>DUP_0</b> , Half Duplex<br>1 <sub>B</sub> <b>DUP_1</b> , Full Duplex                                                                                              |
| SPD   | 5     |      | <b>Operating Speed</b><br>0 <sub>B</sub> <b>SPD_0</b> , 10Mb/s<br>1 <sub>B</sub> <b>SPD_1</b> , 100Mb/s                                                                                                        |
| LINK  | 4     |      | <b>Real Time Link Status</b><br>0 <sub>B</sub> <b>LINK_0</b> , Link Down<br>1 <sub>B</sub> <b>LINK_1</b> , Link Up                                                                                             |
| RPAU  | 3     |      | <b>Pause Recommend Value</b><br>Only Changed when PHY Reset. This bit is disabled automatically when RDUP is 0.<br>0 <sub>B</sub> <b>RPAU_0</b> , Pause Disable<br>1 <sub>B</sub> <b>RPAU_1</b> , Pause Enable |

**Registers Description**

| Field | Bits | Type | Description                                                                                                                                                 |
|-------|------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RDUP  | 2    | ro   | <b>Duplex Recommended Value</b><br>Only Changed when PHY Reset.<br>0 <sub>B</sub> <b>RDUP_0</b> , Half Duplex<br>1 <sub>B</sub> <b>RDUP_1</b> , Full Duplex |
| RSPD  | 1    |      | <b>Speed Recommend Value</b><br>Only Changed when PHY Reset.<br>0 <sub>B</sub> <b>RSPD_0</b> , 10M<br>1 <sub>B</sub> <b>RSPD_1</b> , 100M                   |
| RANV  | 0    |      | <b>Recommended Auto Negotiation Value</b><br>Only Changed when PHY Reset.                                                                                   |

**PHY Recommend Value Status Register**

|                                            |                       |                         |
|--------------------------------------------|-----------------------|-------------------------|
| <b>PRVSR</b>                               | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>PHY Recommend Value Status Register</b> | <b>18<sub>H</sub></b> | <b>0000<sub>H</sub></b> |

|     |      |      |      |      |      |      |      |      |      |    |   |   |   |      |   |
|-----|------|------|------|------|------|------|------|------|------|----|---|---|---|------|---|
| 15  | 14   | 13   | 12   | 11   | 10   | 9    | 8    | 7    | 6    | 5  | 4 | 3 | 2 | 1    | 0 |
| Res | RANV | FSEL | RSPD | RDUP | PREC | FEFD | XOVR | XOVS | RSII | RM |   |   |   | PHYA |   |
| ro  | ro   | ro   | ro   | ro   | ro   | ro   | ro   | ro   | ro   | ro |   |   |   | ro   |   |

| Field | Bits | Type | Description                                                                                                                            |
|-------|------|------|----------------------------------------------------------------------------------------------------------------------------------------|
| Res   | 15   | ro   | <b>Reserved</b><br>Not Applicable                                                                                                      |
| RANV  | 14   |      | <b>Auto Negotiation Recommend Value</b>                                                                                                |
| FSEL  | 13   |      | <b>Fiber Select Recommend Value</b>                                                                                                    |
| RSPD  | 12   |      | <b>Speed Recommend Value</b><br>0 <sub>B</sub> <b>RSPD_1</b> , 10M<br>1 <sub>B</sub> <b>RSPD_0</b> , 100M                              |
| RDUP  | 11   |      | <b>Duplex Recommend Value</b><br>0 <sub>B</sub> <b>RDUP_0</b> , Half Duplex<br>1 <sub>B</sub> <b>RDUP_1</b> , Full Duplex              |
| PREC  | 10   |      | <b>Pause Capability Recommend Value</b><br>0 <sub>B</sub> <b>PREC_0</b> , Pause Disable<br>1 <sub>B</sub> <b>PREC_1</b> , Pause Enable |
| FEFD  | 9    |      | <b>Far End Fault Disable</b><br>0 <sub>B</sub> <b>FEFD_0</b> , Enable<br>1 <sub>B</sub> <b>FEFD_1</b> , Disable                        |
| XOVR  | 8    |      | <b>Cross Over Capability Recommend Value</b><br>0 <sub>B</sub> <b>XOVR_0</b> , Disable<br>1 <sub>B</sub> <b>XOVR_1</b> , Enable        |
| XOVS  | 7    |      | <b>Cross Over Status</b><br>0 <sub>B</sub> <b>XOVS_0</b> , Non-Cross Over<br>1 <sub>B</sub> <b>XOVS_1</b> , Cross Over                 |

**Registers Description**

| Field | Bits | Type | Description                                                                                                                                     |
|-------|------|------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| RSII  | 6    | ro   | <b>RMII_SMI Interface</b><br>0 <sub>B</sub> <b>RSII_0</b> , Non RMII_SMI Interface<br>1 <sub>B</sub> <b>RSII_1</b> , RMII or SMI Interface used |
| RM    | 5    |      | <b>Repeater Mode Recommend Value</b><br>0 <sub>B</sub> <b>RM_0</b> , NIC/SW<br>1 <sub>B</sub> <b>RM_1</b> , Repeater                            |
| PHYA  | 4:0  |      | <b>PHY Address</b>                                                                                                                              |

**Interrupt Status Register**

**ISR** **Offset** **Reset Value**  
**Interrupt Status Register** **19<sub>H</sub>** **0000<sub>H</sub>**


|     |    |    |    |    |    |      |      |      |      |      |      |      |      |      |      |
|-----|----|----|----|----|----|------|------|------|------|------|------|------|------|------|------|
| 15  | 14 | 13 | 12 | 11 | 10 | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
| Res |    |    |    |    |    | XOVC | SPDC | DUPC | PREC | LNKC | SERR | FCAR | TJAB | RJAB | STRE |
| cor |    |    |    |    |    | cor  | cor  | cor  | cor  | cor  | cor  | cor  | cor  | cor  | cor  |

**Registers Description**

| Field | Bits  | Type | Description                                                                                                                                                          |
|-------|-------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Res   | 15:10 | cor  | <b>Reserved</b><br>Not Applicable                                                                                                                                    |
| XOVC  | 9     |      | <b>Cross Over mode Changed</b><br>0 <sub>B</sub> <b>XOVC_0</b> , Cross Over mode Not Changed<br>1 <sub>B</sub> <b>XOVC_1</b> , Cross Over mode Changed               |
| SPDC  | 8     |      | <b>Speed Changed</b><br>0 <sub>B</sub> <b>SPDC_0</b> , Speed Not Changed<br>1 <sub>B</sub> <b>SPDC_1</b> , Speed Changed                                             |
| DUPC  | 7     |      | <b>Duplex Changed</b><br>0 <sub>B</sub> <b>DUPC_0</b> , Duplex not changed<br>1 <sub>B</sub> <b>DUPC_1</b> , Duplex Changed                                          |
| PREC  | 6     |      | <b>Page Received</b><br>0 <sub>B</sub> <b>PREC_0</b> , Page not received<br>1 <sub>B</sub> <b>PREC_1</b> , Page Received                                             |
| LNKC  | 5     |      | <b>Link Status Changed</b><br>0 <sub>B</sub> <b>LNKC_0</b> , Link Status not Changed<br>1 <sub>B</sub> <b>LNKC_1</b> , Link Status Changed                           |
| SERR  | 4     |      | <b>Symbol Error</b><br>0 <sub>B</sub> <b>SERR_0</b> , No symbol Error<br>1 <sub>B</sub> <b>SERR_1</b> , Symbol Error                                                 |
| FCAR  | 3     |      | <b>False Carrier</b><br><i>Note: High whenever Link is Failed</i><br>0 <sub>B</sub> <b>FCAR_0</b> , No false carrier<br>1 <sub>B</sub> <b>FCAR_1</b> , False Carrier |
| TJAB  | 2     |      | <b>Transmit Jabber</b><br>0 <sub>B</sub> <b>TJAB_0</b> , No Jabber<br>1 <sub>B</sub> <b>TJAB_1</b> , Jabber                                                          |
| RJAB  | 1     |      | <b>Receive Jabber</b><br>0 <sub>B</sub> <b>RJAB_0</b> , No Jabber<br>1 <sub>B</sub> <b>RJAB_1</b> , Jabber                                                           |
| STRE  | 0     |      | <b>Error End of Stream</b><br>0 <sub>B</sub> <b>STRE_0</b> , No ESD Error<br>1 <sub>B</sub> <b>STRE_1</b> , ESD Error                                                |

**Receive Error Counter Register**

|                                       |                       |                         |
|---------------------------------------|-----------------------|-------------------------|
| <b>RECR</b>                           | <b>Offset</b>         | <b>Reset Value</b>      |
| <b>Receive Error Counter Register</b> | <b>1D<sub>H</sub></b> | <b>0000<sub>H</sub></b> |

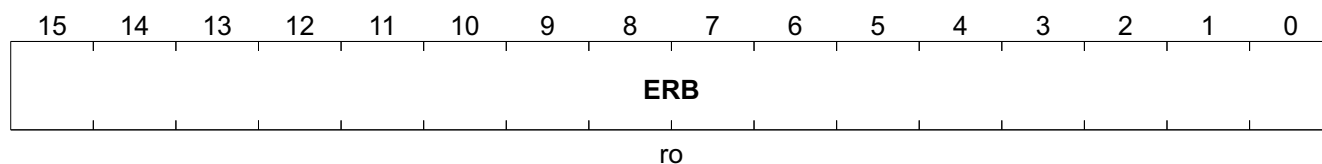

**Registers Description**

| Field | Bits | Type | Description                                                                                                                                                                                                                                                                                                                                                 |
|-------|------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ERB   | 15:0 | ro   | <b>Error Counter</b><br>Includes.<br>1 <sub>H</sub> <b>100MFC</b> , 100M False Carrier<br>2 <sub>H</sub> <b>100MSE</b> , 100M Symbol Error<br>3 <sub>H</sub> <b>10MTJ</b> , 10M Transmit Jabber<br>4 <sub>H</sub> <b>10MRJ</b> , 10M Receive Jabber<br>5 <sub>H</sub> <b>ESS</b> , Error Start of Stream<br>6 <sub>H</sub> <b>EES</b> , Error End of Stream |

**Chip ID Register**

| CIR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Offset          | Reset Value       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------|
| Chip ID Register                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 1F <sub>H</sub> | 8125 <sub>H</sub> |
| <div style="display: flex; justify-content: space-between; padding: 0 10px;"> <span>15</span><span>14</span><span>13</span><span>12</span><span>11</span><span>10</span><span>9</span><span>8</span><span>7</span><span>6</span><span>5</span><span>4</span><span>3</span><span>2</span><span>1</span><span>0</span> </div> <div style="border: 1px solid black; height: 30px; margin: 5px 0; position: relative;"> <div style="position: absolute; top: 5px; left: 50%; transform: translateX(-50%);"><b>CHIPID</b></div> </div> <div style="text-align: center; margin-top: 5px;">ro</div> |                 |                   |

| Field  | Bits | Type | Description        |
|--------|------|------|--------------------|
| CHIPID | 15:0 | ro   | <b>CHIPID 15:0</b> |

## 5 Electrical Characteristics

### 5.1 DC Characterization

#### 5.1.1 Absolute Maximum Rating

**Table 23 Absolute Maximum Rating**

| Parameter           | Symbol     | Values |      |                   | Unit | Note / Test Condition |
|---------------------|------------|--------|------|-------------------|------|-----------------------|
|                     |            | Min.   | Typ. | Max.              |      |                       |
| 3.3 V Power Supply  | $V_{CC33}$ | 3.0    | –    | 3.6               | V    | –                     |
| 2.5 V Power Supply  | $V_{CC25}$ | 2.25   | –    | 2.75              | V    | –                     |
| Input Voltage       | $V_{IN}$   | -0.3   | –    | $V_{CC33} + 0.3$  | V    | –                     |
| Output Voltage      | $V_{OUT}$  | -0.25  | –    | $V_{CC25} + 0.25$ | V    | –                     |
| Storage Temperature | $T_{STG}$  | -55    | –    | 155               | °C   | –                     |
| Power Consumption   | $P_C$      | –      | –    | 0.5               | W    | –                     |
| ESD Rating          | $V_{ESD}$  | –      | –    | 2000              | V    | –                     |

#### 5.1.2 Recommended Operating Conditions

**Table 24 Recommended Operating Conditions**

| Parameter                      | Symbol     | Values |      |            | Unit | Note / Test Condition |
|--------------------------------|------------|--------|------|------------|------|-----------------------|
|                                |            | Min.   | Typ. | Max.       |      |                       |
| Power Supply                   | $V_{CC33}$ | 3.135  | 3.3  | 3.465      | V    | –                     |
| Input Voltage                  | $V_{IN}$   | 0      | –    | $V_{CC33}$ | V    | –                     |
| Junction Operating Temperature | $T_j$      | 0      | 25   | 115        | °C   | –                     |

##### 5.1.2.1 DC Characteristics for 2.5 V Operation


Under  $V_{CC} = 3.0 \text{ V} \sim 3.6 \text{ V}$ ,  $T_j = 0^\circ\text{C} \sim 115^\circ\text{C}$

**Table 25 DC Characteristics for 2.5 V Operation**

| Parameter                     | Symbol   | Values         |      |                | Unit       | Note / Test Condition                         |
|-------------------------------|----------|----------------|------|----------------|------------|-----------------------------------------------|
|                               |          | Min.           | Typ. | Max.           |            |                                               |
| Input Low Voltage             | $V_{IL}$ | –              | –    | $0.3 * V_{CC}$ | V          | CMOS                                          |
| Input High Voltage            | $V_{IH}$ | $0.7 * V_{CC}$ | v    | –              | V          | CMOS                                          |
| Output Low Voltage            | $V_{OL}$ | –              | –    | 0.4            | V          | CMOS                                          |
| Output High Voltage           | $V_{OH}$ | 2.0            | –    | –              | V          | CMOS                                          |
| Input Pull-up/down Resistance | $R_I$    | –              | 75   | –              | K $\Omega$ | $V_{IL} = 0 \text{ V}$ or $V_{IH} = V_{CC33}$ |

## 5.2 AC Characteristics

### 5.2.1 XI/OSCI (Crystal/Oscillator) Timing (In MII Mode)

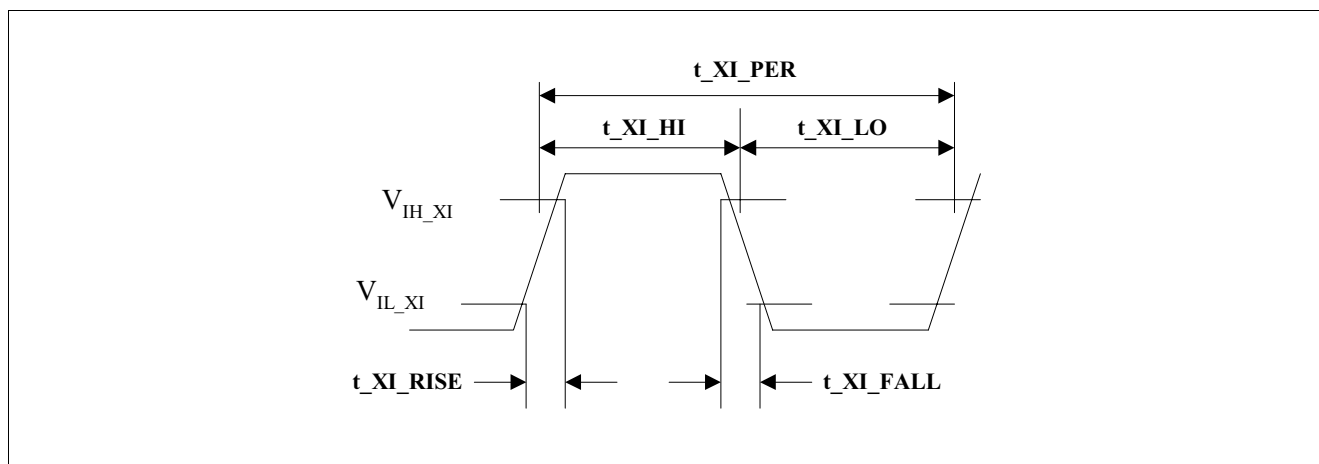

**Figure 25 Crystal/Oscillator Timing**


**Table 26 Crystal/Oscillator Timing**

| Parameter                                                  | Symbol         | Values           |      |                  | Unit | Note / Test Condition |
|------------------------------------------------------------|----------------|------------------|------|------------------|------|-----------------------|
|                                                            |                | Min.             | Typ. | Max.             |      |                       |
| XI/OSCI Clock Period <sup>1)</sup>                         | $t_{XI\_PER}$  | 40.0<br>- 50 ppm | 40.0 | 40.0<br>+ 50 ppm | ns   | —                     |
| XI/OSCI Clock High                                         | $t_{XI\_HI}$   | 14               | 20.0 | —                | ns   | —                     |
| XI/OSCI Clock Low                                          | $t_{XI\_LO}$   | 14               | 20.0 | —                | ns   | —                     |
| XI/OSCI Clock Rise Time, $V_{IL}$ (max) to $V_{IH}$ (min.) | $t_{XI\_RISE}$ | —                | —    | 4                | ns   | —                     |
| XI/OSCI Clock Fall Time, $V_{IH}$ (min.) to $V_{IL}$ (max) | $t_{XI\_FALL}$ | —                | —    | 4                | ns   | —                     |

1) Clock period less than 40ns - 50ppm or greater than 40ns + 50ppm may introduce peer receive CRC due to insufficient receive FIFO depth. Check peer receive FIFO description to confirm.

## 5.3 RMI Timing

### 5.3.1 REFCLK Input Timing (XI in RMI Mode)

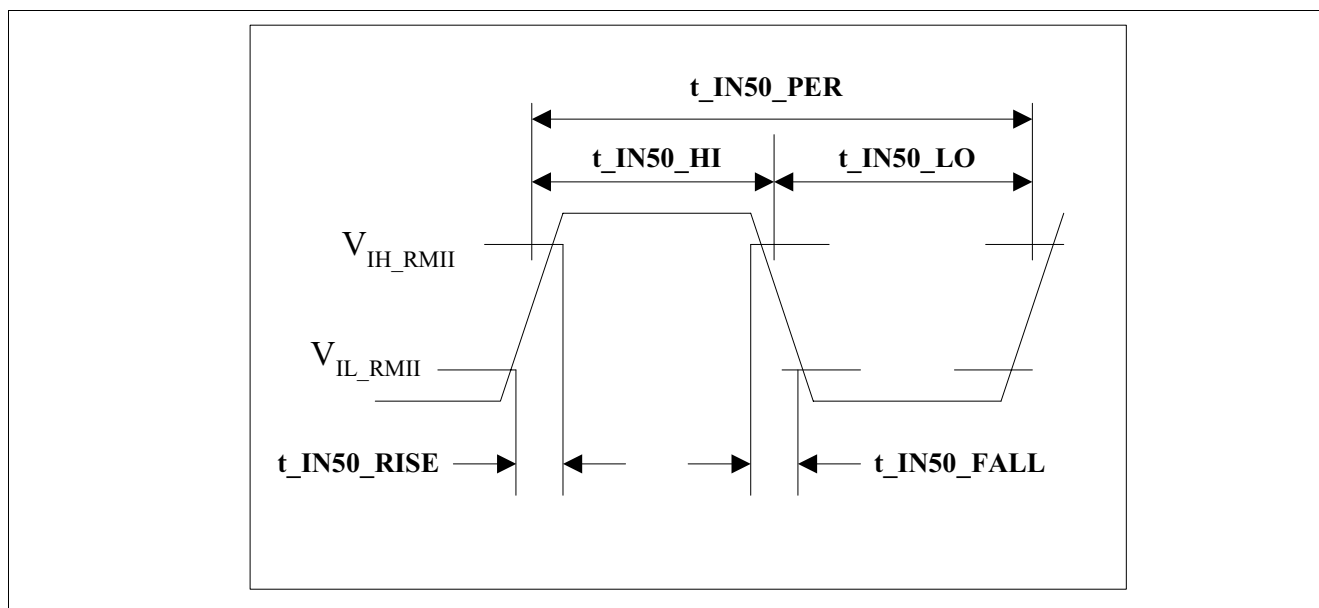


**Figure 26** REFCLK Input Timing

**Table 27** REFCLK Input Timing

| Parameter                                                    | Symbol           | Values           |      |                  | Unit | Note / Test Condition |
|--------------------------------------------------------------|------------------|------------------|------|------------------|------|-----------------------|
|                                                              |                  | Min.             | Typ. | Max.             |      |                       |
| REFCLK Clock Period                                          | $t_{IN50\_PER}$  | 20.0<br>- 50 ppm | 20.0 | 20.0<br>+ 50 ppm | ns   | —                     |
| REFCLK Clock High                                            | $t_{IN50\_HI}$   | 8                | 10.0 | —                | ns   | —                     |
| REFCLK Clock Low                                             | $t_{IN50\_LO}$   | 8                | 10.0 | —                | ns   | —                     |
| REFCLK Clock Rise Time,<br>$V_{IL}$ (max) to $V_{IH}$ (min.) | $t_{IN50\_RISE}$ | —                | —    | 2                | ns   | —                     |
| REFCLK Clock Fall Time,<br>$V_{IH}$ (min.) to $V_{IL}$ (max) | $t_{IN50\_FALL}$ | —                | —    | 2                | ns   | —                     |

### 5.3.2 REFCLK Output Timing (CLKO50 in RMII Mode)

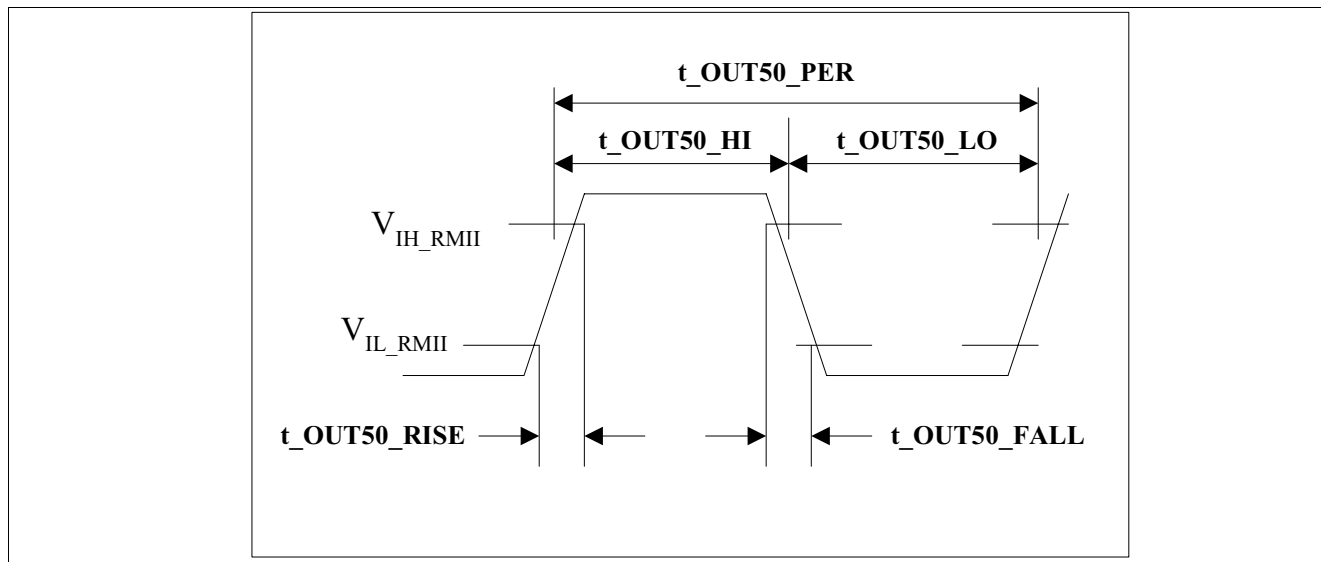


**Figure 27 REFCLK Output Timing**

**Table 28 REFCLK Output Timing**


| Parameter                                                    | Symbol            | Values           |      |                  | Unit | Note / Test Condition |
|--------------------------------------------------------------|-------------------|------------------|------|------------------|------|-----------------------|
|                                                              |                   | Min.             | Typ. | Max.             |      |                       |
| REFCLK Clock Period                                          | $t_{OUT50\_PER}$  | 20.0<br>- 50 ppm | 20.0 | 20.0<br>+ 50 ppm | ns   | –                     |
| REFCLK Clock High                                            | $t_{OUT50\_HI}$   | 8                | 10.0 | 12               | ns   | –                     |
| REFCLK Clock Low                                             | $t_{OUT50\_LO}$   | 8                | 10.0 | 12               | ns   | –                     |
| REFCLK Clock Rise Time,<br>$V_{IL}$ (max) to $V_{IH}$ (min.) | $t_{OUT50\_RISE}$ | –                | –    | 2                | ns   | –                     |
| REFCLK Clock Fall Time,<br>$V_{IH}$ (min.) to $V_{IL}$ (max) | $t_{OUT50\_FALL}$ | –                | –    | 2                | ns   | –                     |
| REFCLK Clock Jittering (p-p)                                 | $t_{OUT50\_JIT}$  | –                | 0.15 | –                | ns   | v                     |

### 5.3.3 RMII Transmit Timing

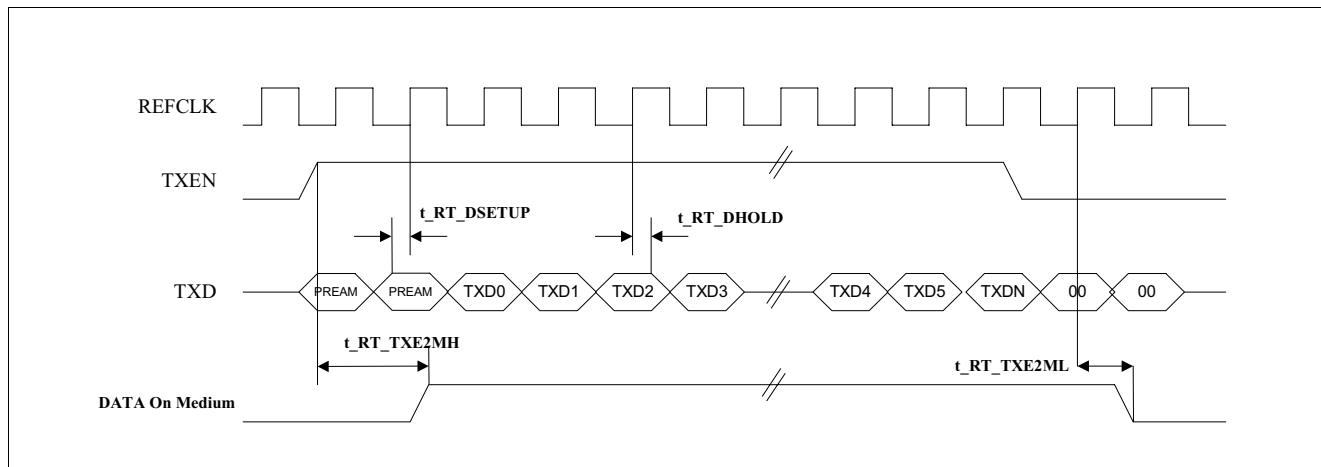
**Figure 28 RMI Transmit Timing**
**Table 29 RMI Transmit Timing**

| Parameter                               | Symbol              | Values |      |      | Unit | Note / Test Condition |
|-----------------------------------------|---------------------|--------|------|------|------|-----------------------|
|                                         |                     | Min.   | Typ. | Max. |      |                       |
| TXD to REFCLK Rising Setup Time         | $t_{RT\_DSETUP}$    | 2      | –    | –    | ns   | –                     |
| TXD to REFCLK Rising Hold Time          | $t_{RT\_DHOLD}$     | 2      | –    | –    | ns   | –                     |
| TXEN asserts to data transmit to medium | $t_{RT\_TXE2MH100}$ | –      | –    | 235  | ns   | –                     |
| TXEN asserts to data transmit to medium | $t_{RT\_TXE2MH10}$  | –      | –    | 1550 | ns   | –                     |
| TXEN de-asserts to finish transmitting  | $t_{RT\_TXE2ML100}$ | –      | –    | 260  | ns   | –                     |
| TXEN de-asserts to finish transmitting  | $t_{RT\_TXE2ML10}$  | –      | –    | 1250 | ns   | –                     |

### 5.3.4 RMI Receive Timing

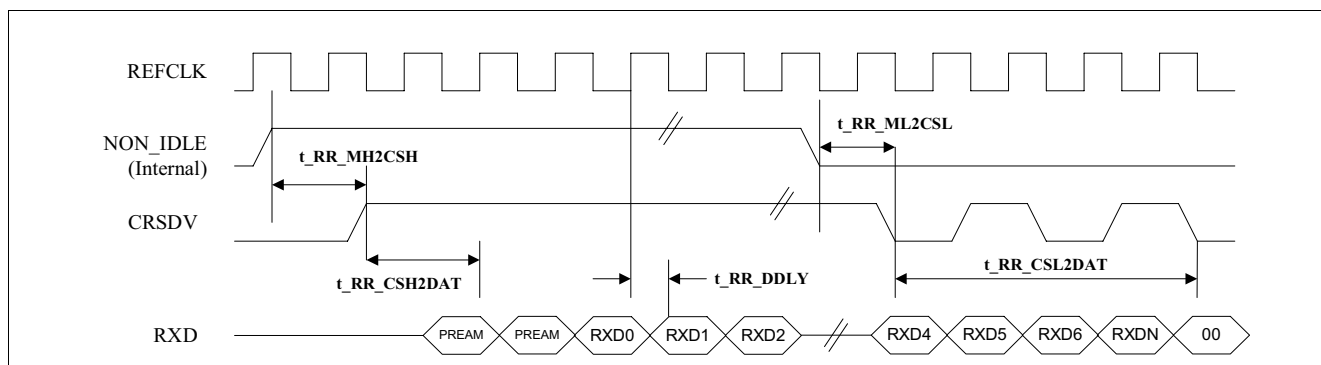

**Figure 29 RMI Receive Timing**

**Table 30 RMII Receive Timing**

| Parameter                               | Symbol               | Values |      |      | Unit | Note / Test Condition |
|-----------------------------------------|----------------------|--------|------|------|------|-----------------------|
|                                         |                      | Min.   | Typ. | Max. |      |                       |
| Signal Detected on Medium to CRSDV High | $t_{RR\_MH2CSH100}$  | –      | –    | 265  | ns   | –                     |
| Signal Detected on Medium to CRSDV High | $t_{RR\_MH2CSH10}$   | –      | –    | 1000 | ns   | –                     |
| IDLE Detected on Medium to CRSDV low    | $t_{RR\_ML2CSL100}$  | –      | –    | 260  | ns   | –                     |
| IDLE Detected on Medium to CRSDV low    | $t_{RR\_ML2CSL10}$   | –      | –    | 570  | ns   | –                     |
| CRSDV High to Receive Data on RXD       | $t_{RR\_CSH2DAT100}$ | –      | –    | 160  | ns   | –                     |
| CRSDV High to Receive Data on RXD       | $t_{RR\_CSH2DAT10}$  | –      | –    | 1600 | ns   | –                     |
| CRSDV Toggle to End of Data Receiving   | $t_{RR\_CSL2DAT100}$ | –      | 160  | –    | ns   | –                     |
| CRSDV Toggle to End of Data Receiving   | $t_{RR\_CSL2DAT10}$  | –      | 1600 | –    | ns   | –                     |
| REFCLK Rising to RXD/CRSDV Delay Time   | $t_{RR\_DDL Y}$      | –      | –    | 5    | ns   | –                     |

## 5.4 MII Timing

### 5.4.1 RXCLK Clock Timing

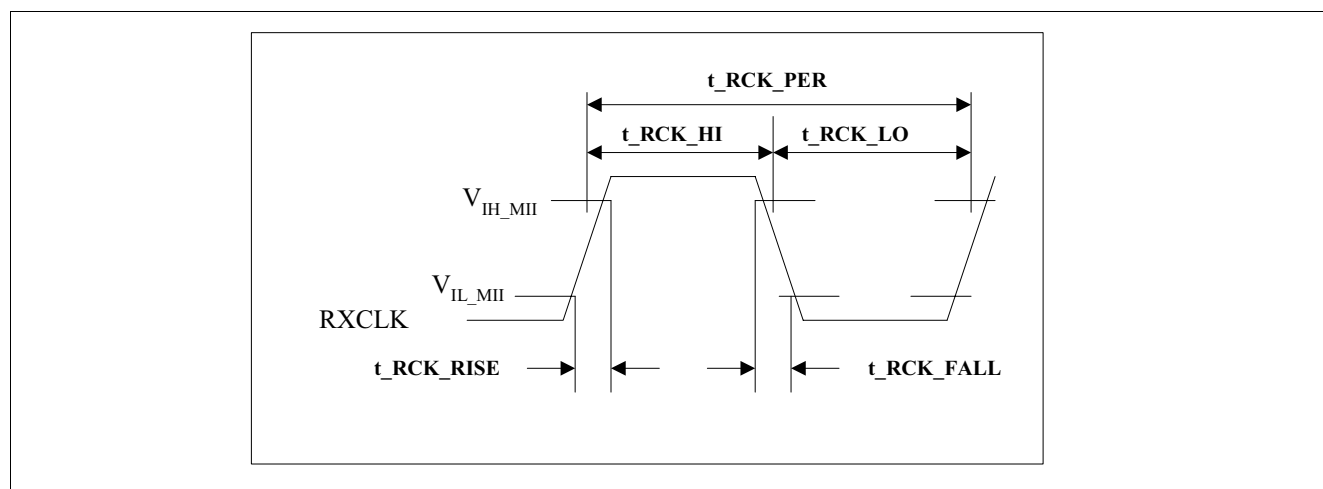
**Figure 30 RXCLK Output Timing**


**Electrical Characteristics**
**Table 31 REFCLK Input Timing**

| Parameter                                                   | Symbol            | Values            |       |                   | Unit | Note / Test Condition |
|-------------------------------------------------------------|-------------------|-------------------|-------|-------------------|------|-----------------------|
|                                                             |                   | Min.              | Typ.  | Max.              |      |                       |
| RXCLK Clock Period(100M)<br>Note <sup>1)</sup>              | $t_{RCK\_PER100}$ | 40.0<br>- 50 ppm  | 40.0  | 40.0<br>+ 50 ppm  | ns   | —                     |
| RXCLK Clock Period(10M)<br>Note <sup>2)</sup>               | $t_{RCK\_PER10}$  | 400.0<br>- 50 ppm | 400.0 | 400.0<br>+ 50 ppm | ns   | —                     |
| RXCLK Clock High (100M)                                     | $t_{RCK\_HI100}$  | 16                | —     | 24                |      | —                     |
| RXCLK Clock High (10M)                                      | $t_{RCK\_HI10}$   | —                 | 200   | —                 |      | —                     |
| RXCLK Clock Low (100M)                                      | $t_{RCK\_LO100}$  | 16                | —     | 24                | ns   | —                     |
| RXCLK Clock Low (10M)                                       | $t_{RCK\_LO10}$   | —                 | 200   | —                 |      | —                     |
| RXCLK Clock Rise Time, $V_{IL}$<br>(max) to $V_{IH}$ (min.) | $t_{RCK\_RISE}$   | —                 | —     | 2                 | ns   | —                     |
| RXCLK Clock Fall Time, $V_{IH}$<br>(min.) to $V_{IL}$ (max) | $t_{RCK\_FALL}$   | —                 | —     | 2                 | ns   | —                     |
| REFCLK Clock Jittering (p-p)                                | $t_{RCK\_JIT}$    | —                 | 0.15  | —                 | ns   | —                     |

1) Clock period ppm value is highly depended upon peer transmitter clock source skew.

2) Clock period ppm value is highly depended upon peer transmitter clock source skew.

## 5.4.2 MII Receive Timing

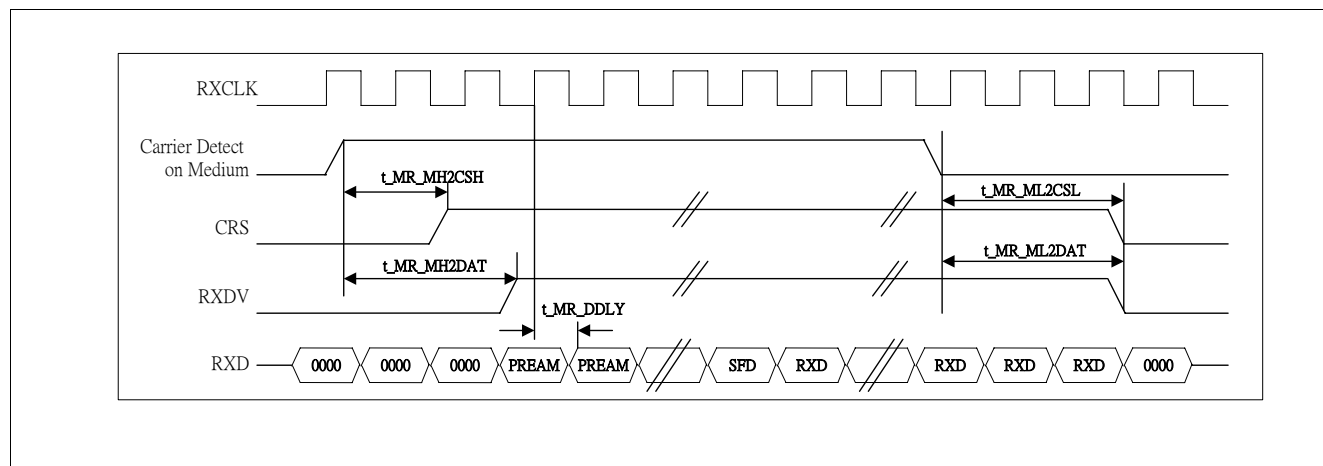


**Figure 31 MII Receive Timing**

**Table 32 MII Receive Timing**

| Parameter                              | Symbol              | Values |      |      | Unit | Note / Test Condition |
|----------------------------------------|---------------------|--------|------|------|------|-----------------------|
|                                        |                     | Min.   | Typ. | Max. |      |                       |
| Signal Detected on Medium to CRS High  | $t_{MR\_MH2CSH100}$ | —      | —    | 140  | ns   | —                     |
| Signal Detected on Medium to CRS High  | $t_{MR\_MH2CSH10}$  | —      | —    | 1450 | ns   | —                     |
| Signal Detected on Medium to RXDV High | $t_{MR\_MH2DAT100}$ | —      | —    | 150  | ns   | —                     |
| Signal Detected on Medium to RXDV High | $t_{MR\_MH2DAT10}$  | —      | —    | 2300 | ns   | —                     |
| RXCLK rising to Data Valid Delay Time  | $t_{MR\_DDLY100}$   | 10     | —    | 25   | ns   | —                     |
| RXCLK rising to Data Valid Delay Time  | $t_{MR\_DDLY10}$    | 10     | —    | 25   | ns   | —                     |
| IDLE Detected on Medium to CRS Low     | $t_{MR\_ML2CSL100}$ | —      | —    | 120  | ns   | —                     |
| DLE Detected on Medium to CRS Low      | $t_{MR\_ML2CSL10}$  | —      | —    | 235  | ns   | —                     |
| DLE Detected on Medium to RXDV Low     | $t_{MR\_ML2DAT100}$ | —      | —    | 150  | ns   | —                     |
| DLE Detected on Medium to RXDV Low     | $t_{MR\_ML2DAT10}$  | —      | —    | 1450 | ns   | —                     |

### 5.4.3 TXCLK Output Timing

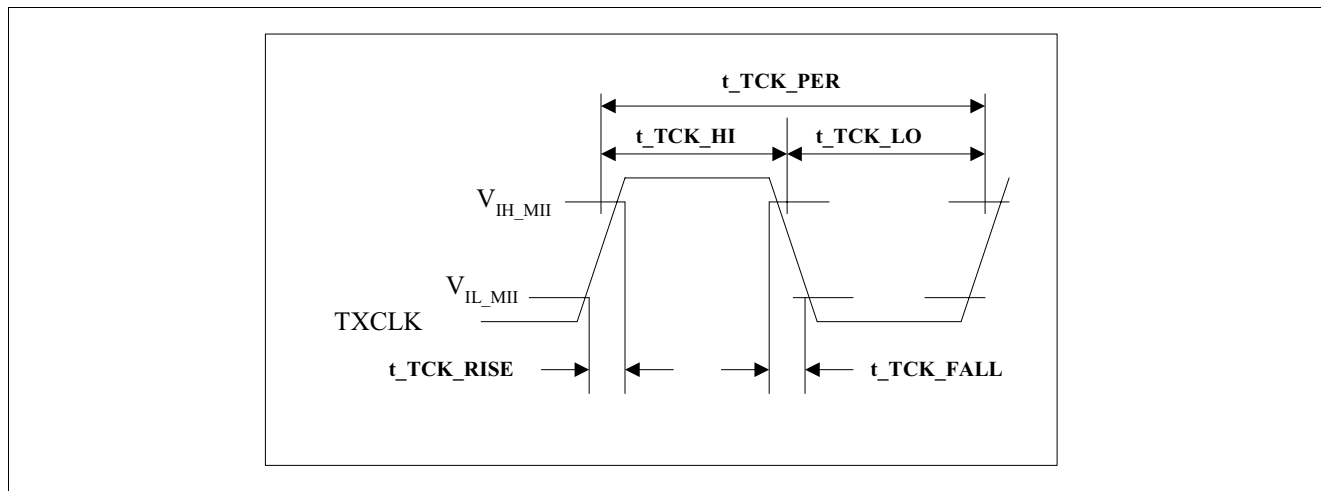


**Figure 32 TXCLK Output Timing**

**Table 33 TXCLK Output Timing**

| Parameter                                     | Symbol            | Values           |      |                  | Unit | Note / Test Condition |
|-----------------------------------------------|-------------------|------------------|------|------------------|------|-----------------------|
|                                               |                   | Min.             | Typ. | Max.             |      |                       |
| TXCLK Clock Period (100M)                     | $t_{TCK\_PER100}$ | 40.0<br>- 50 ppm | 40.0 | 40.0<br>+ 50 ppm | ns   | —                     |
| TXCLK Clock Period (10M)                      | $t_{TCK\_PER10}$  | 40.0<br>- 50 ppm | 40.0 | 40.0<br>+ 50 ppm | ns   | —                     |
| TXCLK Clock High (100M)                       | $t_{TCK\_HI100}$  | 16               | —    | 24               | ns   | —                     |
| TXCLK Clock High (10M)                        | $t_{TCK\_HI10}$   | 160              | —    | 240              | ns   | —                     |
| TXCLK Clock Low(100M)                         | $t_{TCK\_LO100}$  | 16               | —    | 24               | ns   | —                     |
| TXCLK Clock High (10M)                        | $t_{TCK\_LO10}$   | 160              | —    | 240              | ns   | —                     |
| TXCLK Clock Rise Time, VIL (max) to VIH (min) | $t_{TCK\_RISE}$   | —                | —    | 2                | ns   | —                     |
| TXCLK Clock Fall Time, VIH (min) to VIL (max) | $t_{TCK\_FALL}$   | —                | —    | 2                | ns   | —                     |
| TXCLK Clock Jittering (p-p)                   | $t_{TCK\_JIT}$    | —                | 0.15 | —                | ns   | —                     |


### 5.4.4 MII Transmit Timing

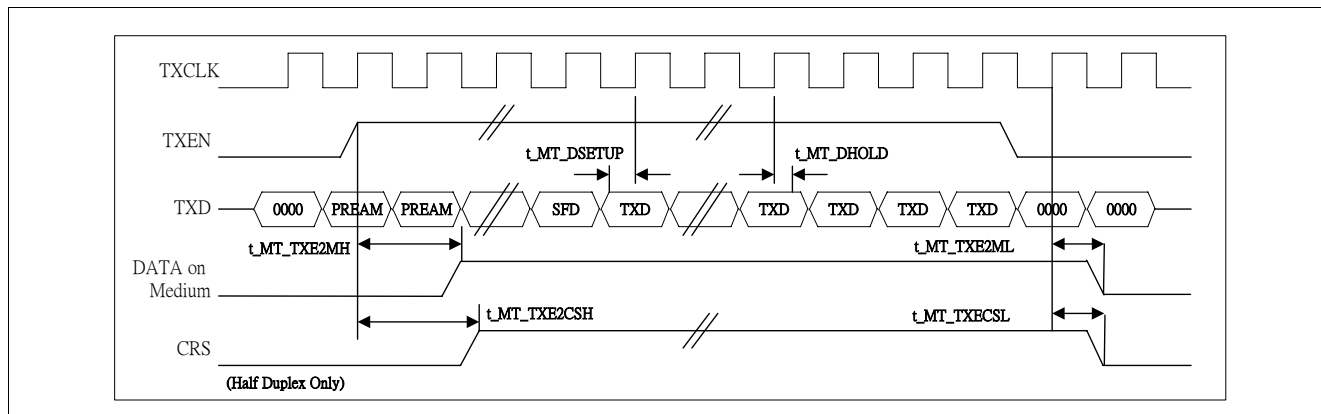
**Figure 33 MII Transmit Timing**
**Table 34 MII Transmit Timing**

| Parameter                                      | Symbol               | Values |      |      | Unit | Note / Test Condition |
|------------------------------------------------|----------------------|--------|------|------|------|-----------------------|
|                                                |                      | Min.   | Typ. | Max. |      |                       |
| TXD to TXCLK Rising Setup Time                 | $t_{MT\_DSETUP}$     | 10     | –    | 25   | ns   | –                     |
| TXD to TXCLK Rising Hold Time                  | $t_{MT\_DHOLD}$      | 10     | –    | 25   | ns   | –                     |
| TXEN asserts to data transmit to medium (100M) | $t_{MT\_TXE2MH100}$  | –      | –    | 75   | ns   | –                     |
| TXEN asserts to data transmit to medium (10M)  | $t_{MT\_TXE2MH10}$   | –      | –    | 350  | ns   | –                     |
| TXEN asserts to CRS Assert (100M Half)         | $t_{MT\_TXE2CSH100}$ | –      | –    | 15   | ns   | –                     |
| TXEN asserts to CRS Assert (10M Half)          | $t_{MT\_TXE2CSH10}$  | –      | –    | 200  | ns   | –                     |
| TXEN de-asserts to finish transmitting (100M)  | $t_{MT\_TXE2ML100}$  | –      | –    | 95   | ns   | –                     |
| TXEN de-asserts to finish transmitting (10M)   | $t_{MT\_TXE2ML10}$   | –      | –    | 660  | ns   | –                     |
| TXEN de-asserts to CRS de-asserts (100M)       | $t_{MT\_TXE2CSL100}$ | –      | –    | 15   | ns   | –                     |
| TXEN de-asserts to CRS de-asserts (10M)        | $t_{MT\_TXE2CSL10}$  | –      | –    | 190  | ns   | –                     |


## 5.5 GPSI Timing

### 5.5.1 GPSI Receive Timing

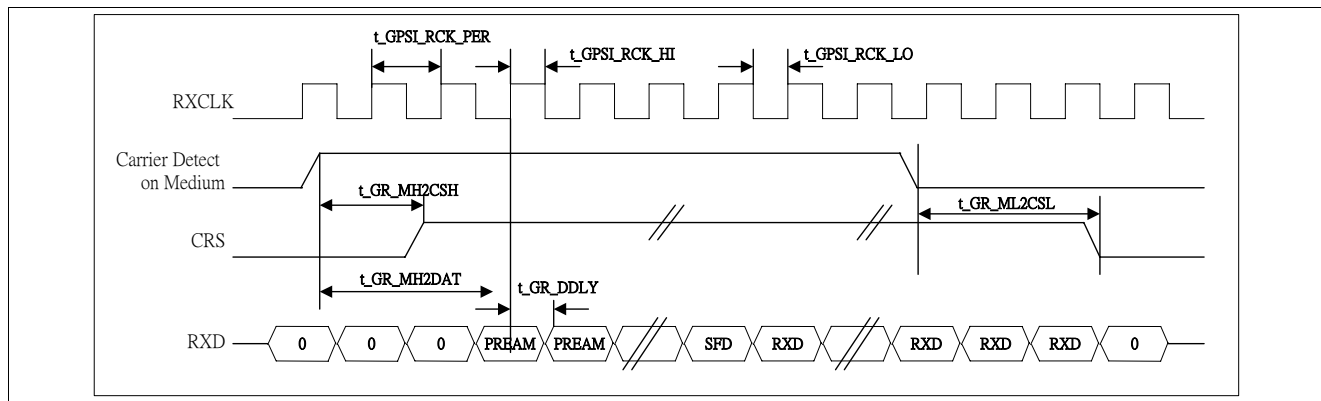
**Figure 34 GPSI Receive Timing**
**Table 35 GPSI Receive Timing**

| Parameter                               | Symbol                      | Values            |       |                   | Unit | Note / Test Condition |
|-----------------------------------------|-----------------------------|-------------------|-------|-------------------|------|-----------------------|
|                                         |                             | Min.              | Typ.  | Max.              |      |                       |
| 10M Receive Clock Period                | $t_{\text{GPSI\_RCK\_PER}}$ | 100.0<br>- 50 ppm | 100.0 | 100.0<br>+ 50 ppm | ns   | —                     |
| 10M Receive Clock High                  | $t_{\text{GPSI\_RCK\_HI}}$  | 40                | —     | —                 | ns   | —                     |
| 10M Receive Clock Low                   | $t_{\text{GPSI\_RCK\_LO}}$  | 40                | —     | —                 | ns   | —                     |
| Signal Detected on Medium to CRS High   | $t_{\text{GR\_MH2CSH}}$     | —                 | —     | 1500              | ns   | —                     |
| Signal Detected on Medium to Data Valid | $t_{\text{GR\_MH2DAT}}$     | —                 | —     | 1600              | ns   | —                     |
| RXCLK rising to Data Valid Delay Time   | $t_{\text{GR\_DDLY}}$       | 40                | —     | 60                | ns   | —                     |
| IDLE Detected on Medium to CRS Low      | $t_{\text{GR\_ML2CSL}}$     | —                 | —     | 230               | ns   | —                     |


## 5.5.2 GPSI Transmit Timing

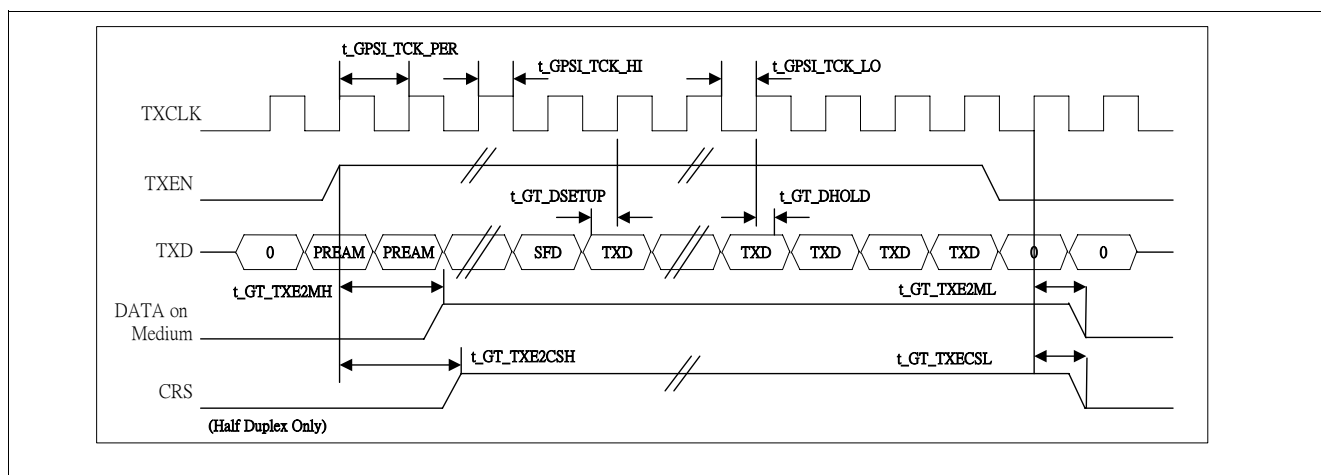
**Figure 35 GPSI Transmit Timing**

**Table 36 GPSI Transmit Timing**

| Parameter                               | Symbol                      | Values            |       |                   | Unit | Note / Test Condition |
|-----------------------------------------|-----------------------------|-------------------|-------|-------------------|------|-----------------------|
|                                         |                             | Min.              | Typ.  | Max.              |      |                       |
| 10M Transmit Clock Period               | $t_{\text{GPSI\_TCK\_PER}}$ | 100.0<br>- 50 ppm | 100.0 | 100.0<br>+ 50 ppm | ns   | —                     |
| 10M Transmit Clock High                 | $t_{\text{GSPI\_TCK\_HI}}$  | 40                | —     | —                 | ns   | —                     |
| 10M Transmit Clock Low                  | $t_{\text{GSPI\_TCK\_LO}}$  | 40                | —     | —                 | ns   | —                     |
| TXD to TXCLK Rising Setup Time          | $t_{\text{GT\_DSETUP}}$     | 40                | —     | —                 | ns   | —                     |
| TXD to TXCLK Rising Hold Time           | $t_{\text{GT\_DHOLD}}$      | 40                | —     | —                 | ns   | —                     |
| TXEN asserts to data transmit to medium | $t_{\text{GT\_TXE2MH}}$     | —                 | —     | 150               | ns   | —                     |
| TXEN asserts to CRS Assert (Half)       | $t_{\text{GT\_TXE2CSH}}$    | —                 | —     | 10                | ns   | —                     |
| TXEN de-asserts to finish transmitting  | $t_{\text{GT\_TXE2ML}}$     | —                 | —     | 900               | ns   | —                     |
| TXEN de-asserts to CRS de-asserts       | $t_{\text{GT\_TXECSL}}$     | —                 | —     | 10                | ns   | —                     |

## 5.6 Serial Management Interface (MDC/MDIO) Timing

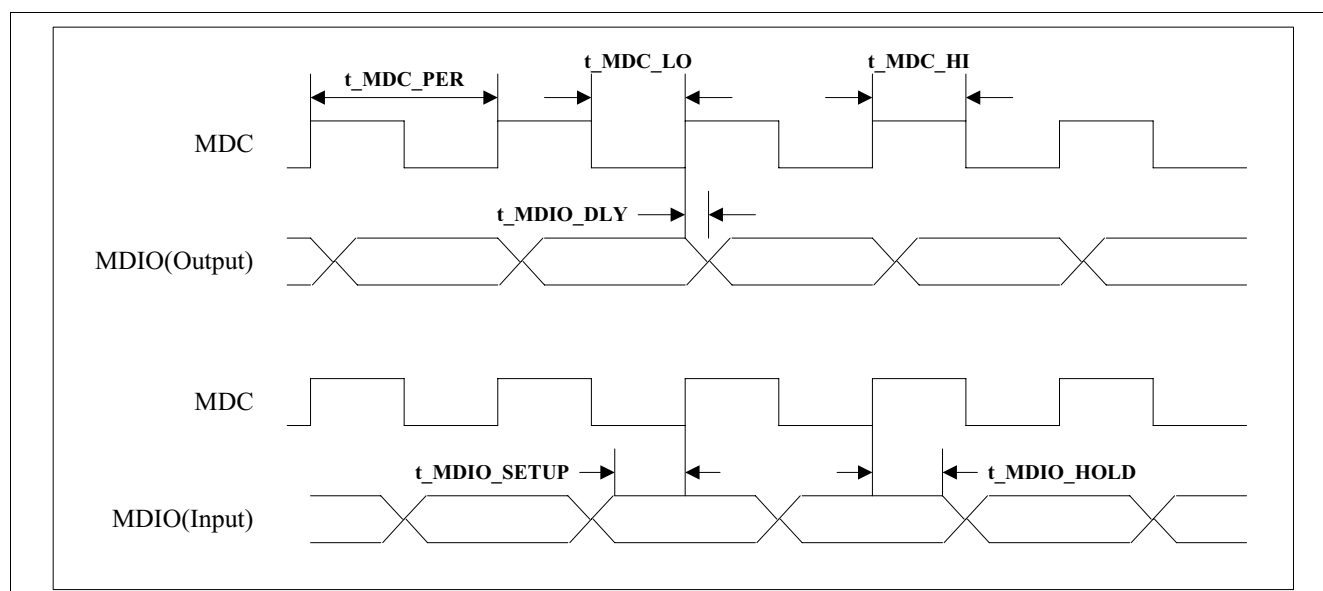

**Figure 36 Serial Management Interface (MDC/MDIO) Timing**
**Table 37 Serial Management Interface (MDC/MDIO) Timing**

| Parameter  | Symbol                | Values |      |      | Unit | Note / Test Condition |
|------------|-----------------------|--------|------|------|------|-----------------------|
|            |                       | Min.   | Typ. | Max. |      |                       |
| MDC Period | $t_{\text{MDC\_PER}}$ | 100    | —    | —    | ns   | —                     |
| MDC High   | $t_{\text{MDC\_HI}}$  | 40     | —    | —    | ns   | —                     |

**Table 37 Serial Management Interface (MDC/MDIO) Timing (cont'd)**

| Parameter                    | Symbol            | Values |      |      | Unit | Note / Test Condition |
|------------------------------|-------------------|--------|------|------|------|-----------------------|
|                              |                   | Min.   | Typ. | Max. |      |                       |
| MDC Low                      | $t_{MDC\_LO}$     | 40     | –    | –    | ns   | –                     |
| MDC to MDIO Delay Time       | $t_{MDIO\_DLY}$   | –      | –    | 20   | ns   | –                     |
| MDIO Input to MDC Setup Time | $t_{MDIO\_SETUP}$ | 10     | –    | –    | ns   | –                     |
| MDIO Input to MDC Hold Time  | $t_{MDIO\_HOLD}$  | 10     | –    | –    | ns   | –                     |

## 5.7 Power On Configuration Timing

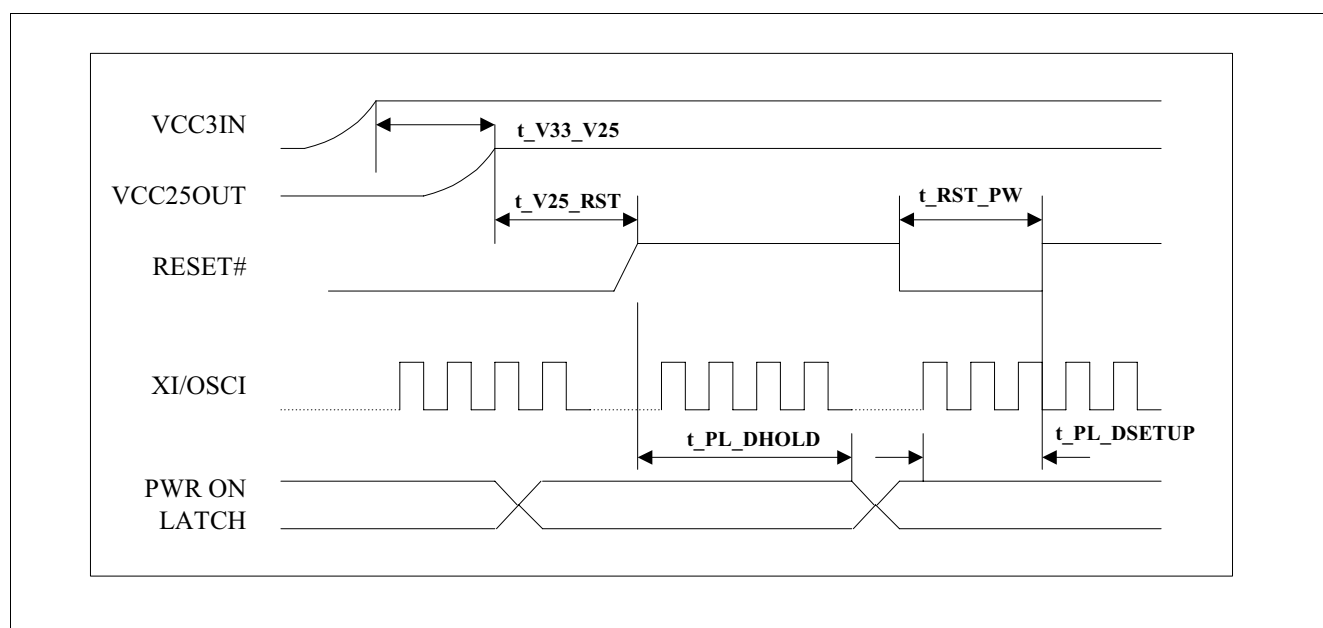
**Figure 37 Power On Configuration Timing**
**Table 38 Power On Configuration Timing**

| Parameter                              | Symbol           | Values |      |      | Unit | Note / Test Condition |
|----------------------------------------|------------------|--------|------|------|------|-----------------------|
|                                        |                  | Min.   | Typ. | Max. |      |                       |
| 3.3V Power Good to 2.5 V Power Good    | $t_{V33\_V25}$   | TBD    | –    | –    | ms   | –                     |
| Hardware Reset With Device Powered up  | $t_{V25\_RST}$   | 200    | –    | –    | ms   | –                     |
| Hardware Reset With Clock Running      | $t_{RST\_PW}$    | 800    | –    | –    | ns   | –                     |
| Reset High to Configuration Setup Time | $t_{PL\_DSETUP}$ | 200    | –    | –    | ns   | –                     |
| Reset High to Configuration Hold Time  | $t_{PL\_DHOLD}$  | 0      | –    | –    | ns   | –                     |

## 6 Packaging

ADM7001/X, Low Profile Quad Flat Package (LQFP) 48 Pin

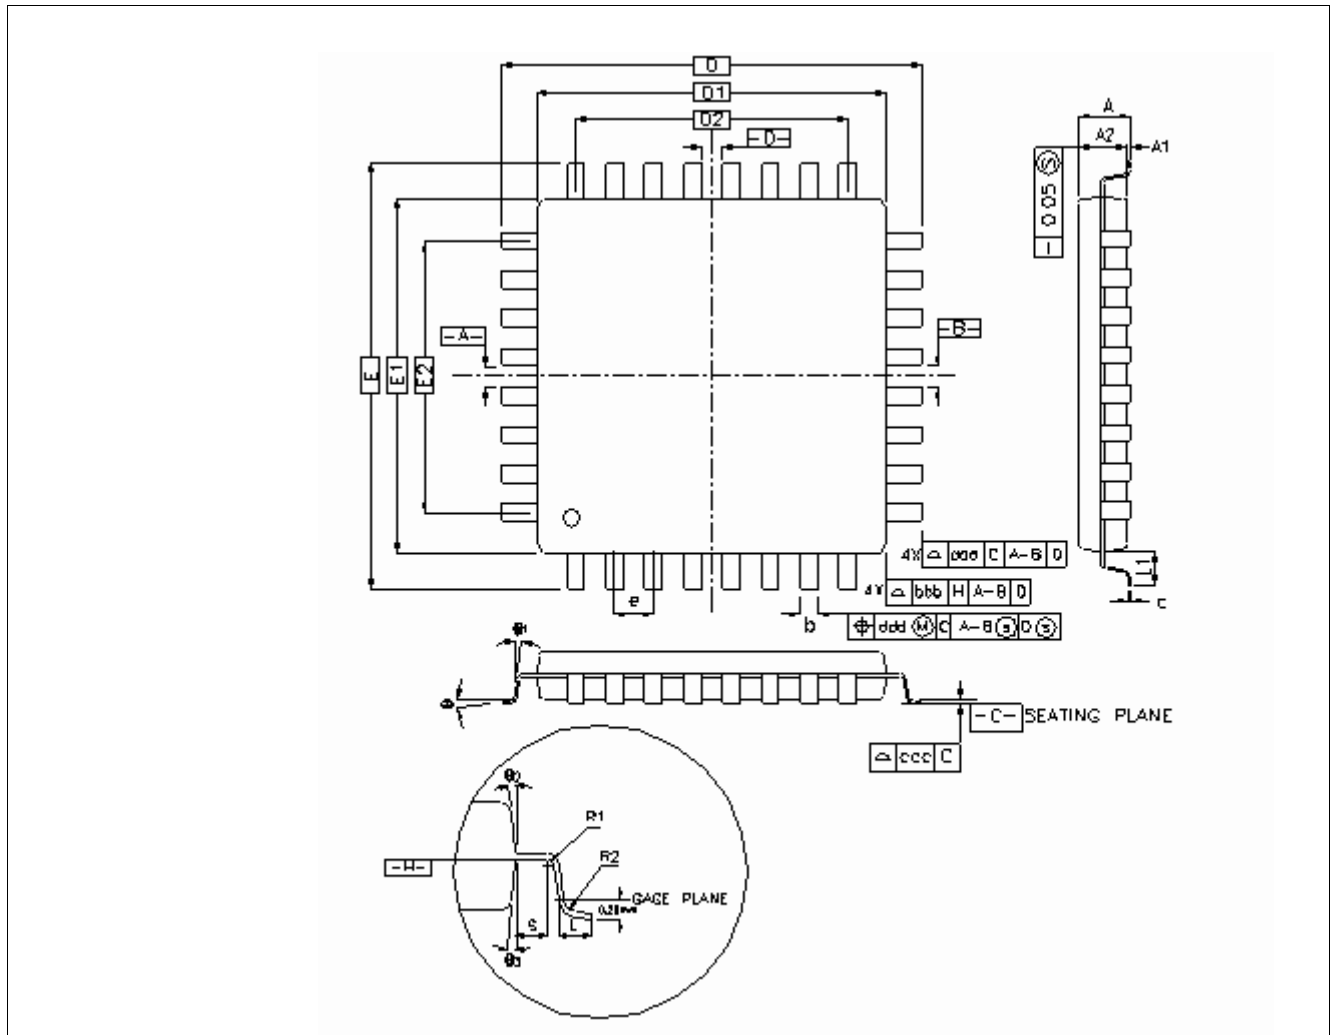


Figure 38 ADM7001/X, Low Profile Quad Flat Package (LQFP)

**Table 39 Dimensions for 100 Pin LQFP Package**

| Symbol                         | Millimeter (mm) |      |      | Inch       |       |       |
|--------------------------------|-----------------|------|------|------------|-------|-------|
|                                | Min.            | Typ. | Max. | Min.       | Typ.  | Max.  |
| A                              | —               | —    | 1.60 | —          | —     | 0.063 |
| A <sub>1</sub>                 | 0.05            | —    | 0.15 | 0.002      | —     | 0.006 |
| A <sub>2</sub>                 | 1.35            | 1.40 | 1.45 | 0.053      | 0.005 | 0.057 |
| D                              | 9.00 BSC.       |      |      | 0.354 BSC. |       |       |
| D <sub>1</sub>                 | 7.00 BSC        |      |      | 0.276 BSC. |       |       |
| E                              | 9.00 BSC        |      |      | 0.354 BSC. |       |       |
| E <sub>1</sub>                 | 7.00 BSC        |      |      | 0.276 BSC. |       |       |
| R <sub>2</sub>                 | 0.08            | —    | 0.20 | 0.003      | —     | 0.008 |
| R <sub>1</sub>                 | 0.08            | —    | —    | 0.003      | —     | —     |
| Θ                              | 0°              | 3.5° | 7°   | 0°         | 3.5°  | 7°    |
| Θ <sub>1</sub>                 | 0°              | —    | —    | 0°         | —     | —     |
| Θ <sub>2</sub>                 | 11°             | 12°  | 13°  | 11°        | 12°   | 13°   |
| Θ <sub>3</sub>                 | 11°             | 12°  | 13°  | 11°        | 12°   | 13°   |
| c                              | 0.09            | —    | 0.20 | 0.004      | —     | 0.008 |
| L                              | 0.45            | 0.60 | 0.75 | 0.018      | 0.024 | 0.030 |
| L <sub>1</sub>                 | 1.00 Ref.       |      |      | 0.039 Ref. |       |       |
| S                              | 0.20            | —    | —    | 0.008      | —     | —     |
| 32L                            |                 |      |      |            |       |       |
| b                              | 0.30            | 0.35 | 0.45 | 0.012      | 0.014 | 0.018 |
| e                              | 0.80 BSC.       |      |      | 0.031 BSC. |       |       |
| D <sub>2</sub>                 | 5.60            |      |      | 0.220      |       |       |
| E <sub>2</sub>                 | 5.60            |      |      | 0.220      |       |       |
| Tolerance of Form and Position |                 |      |      |            |       |       |
| aaa                            | 0.20            |      |      | 0.008      |       |       |
| bbb                            | 0.20            |      |      | 0.008      |       |       |
| ccc                            | 0.10            |      |      | 0.003      |       |       |
| ddd                            | 0.20            |      |      | 0.008      |       |       |
| 44L                            |                 |      |      |            |       |       |
| b                              | 0.17            | 0.20 | 0.27 | 0.007      | 0.008 | 0.011 |
| e                              | 0.50 BSC.       |      |      | 0.020 BSC. |       |       |
| D <sub>2</sub>                 | 5.00            |      |      | 0.197      |       |       |
| E <sub>2</sub>                 | 5.00            |      |      | 0.197      |       |       |
| Tolerance of Form and Position |                 |      |      |            |       |       |
| aaa                            | 0.20            |      |      | 0.008      |       |       |
| bbb                            | 0.20            |      |      | 0.008      |       |       |
| ccc                            | 0.08            |      |      | 0.003      |       |       |
| ddd                            | 0.08            |      |      | 0.003      |       |       |
| 48L                            |                 |      |      |            |       |       |
| b                              | 0.17            | 0.20 | 0.27 | 0.007      | 0.008 | 0.011 |

**Table 39 Dimensions for 100 Pin LQFP Package (cont'd)**

| <b>Symbol</b>                         | <b>Millimeter (mm)</b> | <b>Inch</b> |
|---------------------------------------|------------------------|-------------|
| <b>e</b>                              | 0.50 BSC.              | 0.020 BSC.  |
| <b>D<sub>2</sub></b>                  | 5.50                   | 0.217       |
| <b>E<sub>2</sub></b>                  | 5.50                   | 0.217       |
| <b>Tolerance of Form and Position</b> |                        |             |
| <b>aaa</b>                            | 0.20                   | 0.008       |
| <b>bbb</b>                            | 0.20                   | 0.008       |
| <b>ccc</b>                            | 0.08                   | 0.003       |
| <b>ddd</b>                            | 0.08                   | 0.003       |

[www.infineon.com](http://www.infineon.com)