

### FEATURES

- DC to 11.3 Gbps per port NRZ data rate
- Multitime constant, programmable receive equalization
  - Compensates 25 inches of FR408 at 10.3125 Gbps
  - Compensates 15 inches of FR408 at 11.3 Gbps
- 6-tap programmable transmit feedforward equalization (FFE)
  - Compensates 15 inches of FR408 at 10.3125 Gbps
  - Compensate 10 inches of FR408 at 11.3 Gbps
- Low power
  - 150 mW per channel at 2.5 V (outputs enabled)
- 12 × 12, fully differential, nonblocking array
- Double rank connection programming
- 2-pins, selectable connection maps
- Per lane loss-of-signal detection
- Flexible output termination supply range (1.8 V to 3.3 V)
- DC- or ac-coupled differential CML inputs and outputs
- Programmable CML output levels
- Load from EPROM for automatic power-on ready operation
- Per lane input and output P/N pair inversion for routing ease
- 50 Ω on-chip input/output termination
- Supports 64-bit/66-bit, scrambled or not coded NRZ data up to 11.3 Gbps
- Serial (I<sup>2</sup>C or SPI slave) control interface
- 88-lead LFCSP, 12 mm × 12mm, Pb-free package
- 40°C to +85°C operating temperature range

### APPLICATIONS

- Fiber optic network switching
- 10 Gigabit Ethernet over backplane 10GBASE-KR 802.3ap
- XLAUI/CAUI (802.3ba)
- SONET OC-192/STM-64x
- 1×, 2×, 4×, 8×, and 10× Fibre channel

### GENERAL DESCRIPTION

The **ADN4612** is a 12 × 12 asynchronous, protocol agnostic, digital crosspoint switch with 12 differential PECL-/CML-compatible inputs and 12 differential CML outputs.

The **ADN4612** is optimized for nonreturn-to-zero (NRZ) signaling with data rates of up to 11.3 Gbps per port. Each port offers programmable input equalization, loss-of-signal detection, programmable output swing, and output preemphasis/deemphasis.

### FUNCTIONAL BLOCK DIAGRAM

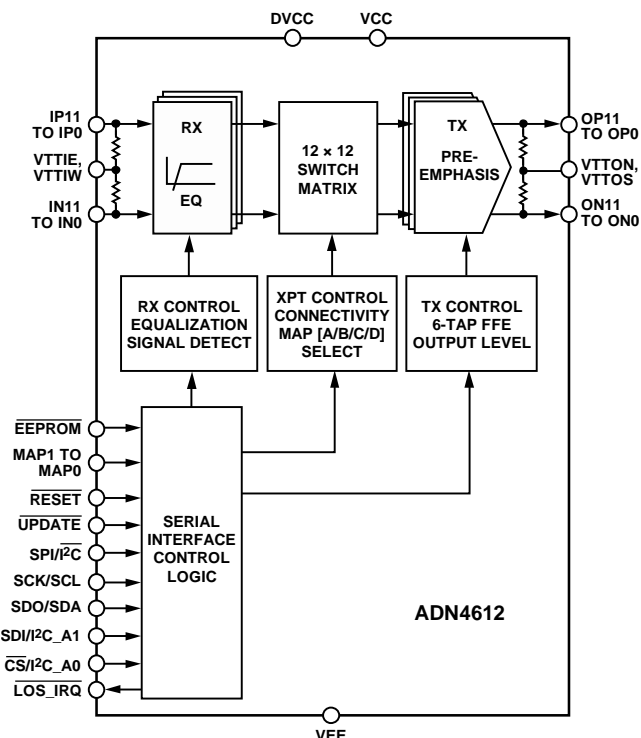


Figure 1.

The **ADN4612** nonblocking switch core implements a 12 × 12 crossbar and supports independent channel switching through the serial control interface. The **ADN4612** has low latency and very low channel-to-channel skew.

The **ADN4612** is packaged in an 88-lead LFCSP package and operates from –40°C to +85°C.

For more information about **ADN4612**, contact Analog Devices, Inc., at [xstream@analog.com](mailto:xstream@analog.com).

Rev. Sp0

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781.329.4700 ©2013 Analog Devices, Inc. All rights reserved.  
[Technical Support](#) [www.analog.com](http://www.analog.com)

**NOTES**