

TOSHIBA Bipolar Linear Integrated Circuit    Silicon Monolithic

**TA48L018F, TA48L02F, TA48L025F,  
TA48L03F, TA48L033F, TA48L05F**


1.8 V, 2 V, 2.5 V, 3 V, 3.3 V, 5 V

Three-Terminal Low Dropout Voltage Regulator with Output Current of 0.15 A

The TA48L\*\*F series consists of fixed-positive-output, low-dropout regulators with an output current of 1 A (max) that utilize V-PNP transistors for the output stage. In response to the need for low-voltage and low-power dissipation devices for use in consumer electronics and industrial appliances, the series offers devices with low output voltages: 1.8 V, 2 V, 2.5 V, 3 V, 3.3 V, 5 V.


**Features**

- Maximum output current: 0.15 A
- Output voltage accuracy:  $V_{OUT} \pm 3\%$  ( $@T_j = 25^\circ\text{C}$ )
- Low standby current: 400  $\mu\text{A}$  (typ.) ( $@I_{OUT} = 0\text{ A}$ )
- Low-dropout voltage:  $V_D = 0.5\text{ V}$  (max) ( $@I_{OUT} = 100\text{ mA}$ )
- Protection function: overheat/overcurrent
- Package type: PW-MINI (SOT-89) package

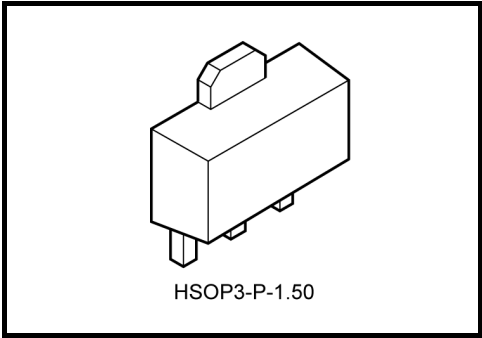

Weight: 0.05 g (typ.)

**Pin Assignment/Marking**

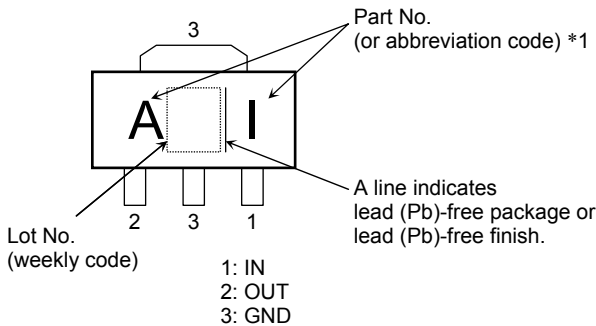


| *1 | Part No.<br>(or abbreviation code) | Part No.  |
|----|------------------------------------|-----------|
|    | AI                                 | TA48L018F |
|    | BI                                 | TA48L02F  |
|    | CI                                 | TA48L025F |
|    | DI                                 | TA48L03F  |
|    | EI                                 | TA48L033F |
|    | FI                                 | TA48L05F  |

**How to Order**

| Product No.      | Package               | Packing Type and Unit for Orders      |
|------------------|-----------------------|---------------------------------------|
| TA48L**F         | PW-MINI (SOT-89)      | On cut tape (TE12L): 100/tape section |
| TA48L**F (TE12L) | Surface-mount package | Embossed tape: 1000 pcs/tape          |

## Block Diagram

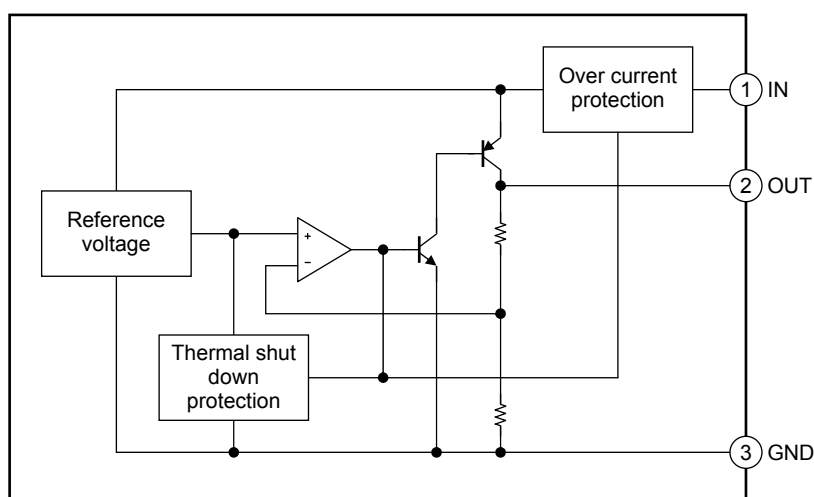

## Absolute Maximum Ratings (Ta = 25°C)

| Characteristics                          | Symbol        | Rating  | Unit |
|--|---------------|---------|------|
| Input voltage                            | $V_{IN}$      | 16      | V    |
| Output current                           | $I_{OUT}$     | 0.15    | A    |
| Operating temperature                    | $T_{opr}$     | -40~85  | °C   |
| Junction temperature                     | $T_j$         | 150     | °C   |
| Storage temperature                      | $T_{stg}$     | -55~150 | °C   |
| Power dissipation                        | $P_D$         | 0.5     | W    |
| Thermal resistance (Junction to ambient) | $R_{th(j-a)}$ | 250     | °C/W |

Note 1: External current and voltage (including negative voltage) should not be applied to pins not specified.

Note 2: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

## Protection Function (reference)

| Characteristics       | Symbol         | Test Condition   | Min | Typ. | Max | Unit |
|-----------------------|----------------|--|-----|------|-----|------|
| Thermal shutdown      | $T_{SD} (T_j)$ | —  | —   | 160  | —   | °C   |
| Peak circuit current  | $I_{PEAK}$     | $V_{IN} = V_{OUT} + 2 \text{ V}, T_j = 25^\circ\text{C}$ | —   | 0.27 | —   | A    |
| Short circuit current | $I_{SC}$       | $V_{IN} = V_{OUT} + 2 \text{ V}, T_j = 25^\circ\text{C}$ | —   | 0.27 | —   | A    |

Note 3: The maximum ratings should not be exceeded when the IC is actually used.

**TA48L018F**
**Electrical Characteristics**

 (C<sub>IN</sub> = 0.33 μF, C<sub>OUT</sub> = 3.3 μF, T<sub>j</sub> = 25°C, unless otherwise specified)

| Characteristics                                   | Symbol              | Test Conditions  | Min   | Typ. | Max   | Unit              |
|---|---------------------|--|-------|------|-------|-------------------|
| Output voltage                                    | V <sub>OUT</sub>    | V <sub>IN</sub> = 3.8 V, I <sub>OUT</sub> = 40 mA  | 1.746 | 1.8  | 1.854 | V                 |
|   |                     | 2.8 V ≤ V <sub>IN</sub> ≤ 12 V, 5 mA ≤ I <sub>OUT</sub> ≤ 100 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C | 1.71  | 1.8  | 1.89  |                   |
| Line regulation                                   | Reg · line          | 2.8 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA                                       | —     | 2    | 20    | mV                |
| Load regulation                                   | Reg · load          | V <sub>IN</sub> = 3.8 V, 5 mA ≤ I <sub>OUT</sub> ≤ 150 mA                                      | —     | 18   | 40    | mV                |
| Quiescent current                                 | I <sub>B</sub>      | 2.8 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 0 A   | —     | 0.4  | 0.8   | mA                |
|   |                     | 2.8 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 100 mA                                      | —     | 1    | 5     |                   |
| Starting quiescent current                        | I <sub>Bstart</sub> | V <sub>IN</sub> = 2.1 V, I <sub>OUT</sub> = 0 A  | —     | 0.5  | 1.5   | mA                |
|   |                     | V <sub>IN</sub> = 2.1 V, I <sub>OUT</sub> = 100 mA   | —     | 5    | 20    |                   |
| Output noise voltage                              | V <sub>NO</sub>     | V <sub>IN</sub> = 3.8 V, I <sub>OUT</sub> = 40 mA, 10 Hz ≤ f ≤ 100 kHz                         | —     | 45   | —     | μV <sub>rms</sub> |
| Ripple rejection                                  | R.R.                | 2.8 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA, f = 120 Hz                           | 54    | 72   | —     | dB                |
| Dropout voltage                                   | V <sub>D</sub>      | I <sub>OUT</sub> = 40 mA   | —     | 0.28 | 0.4   | V                 |
|   |                     | I <sub>OUT</sub> = 100 mA  | —     | 0.32 | 0.5   |                   |
| Average temperature coefficient of output voltage | T <sub>CVO</sub>    | V <sub>IN</sub> = 3.8 V, I <sub>OUT</sub> = 5 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C                 | —     | 0.3  | —     | mV/°C             |

**TA48L02F**
**Electrical Characteristics**

 (C<sub>IN</sub> = 0.33 μF, C<sub>OUT</sub> = 3.3 μF, T<sub>j</sub> = 25°C, unless otherwise specified)

| Characteristics                                   | Symbol              | Test Conditions  | Min  | Typ. | Max  | Unit              |
|---|---------------------|--|------|------|------|-------------------|
| Output voltage                                    | V <sub>OUT</sub>    | V <sub>IN</sub> = 4.0 V, I <sub>OUT</sub> = 40 mA  | 1.94 | 2.0  | 2.06 | V                 |
|   |                     | 3.0 V ≤ V <sub>IN</sub> ≤ 12 V, 5 mA ≤ I <sub>OUT</sub> ≤ 100 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C | 1.90 | 2.0  | 2.10 |                   |
| Line regulation                                   | Reg · line          | 3.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA                                       | —    | 2    | 20   | mV                |
| Load regulation                                   | Reg · load          | V <sub>IN</sub> = 4.0 V, 5 mA ≤ I <sub>OUT</sub> ≤ 150 mA                                      | —    | 18   | 40   | mV                |
| Quiescent current                                 | I <sub>B</sub>      | 3.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 0 A   | —    | 0.4  | 0.8  | mA                |
|   |                     | 3.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 100 mA                                      | —    | 1    | 5    |                   |
| Starting quiescent current                        | I <sub>Bstart</sub> | V <sub>IN</sub> = 2.1 V, I <sub>OUT</sub> = 0 A  | —    | 0.5  | 1.5  | mA                |
|   |                     | V <sub>IN</sub> = 2.1 V, I <sub>OUT</sub> = 100 mA   | —    | 5    | 20   |                   |
| Output noise voltage                              | V <sub>NO</sub>     | V <sub>IN</sub> = 4.0 V, I <sub>OUT</sub> = 40 mA, 10 Hz ≤ f ≤ 100 kHz                         | —    | 55   | —    | μV <sub>rms</sub> |
| Ripple rejection                                  | R.R.                | 3.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA, f = 120 Hz                           | 52   | 70   | —    | dB                |
| Dropout voltage                                   | V <sub>D</sub>      | I <sub>OUT</sub> = 40 mA   | —    | 0.2  | 0.35 | V                 |
|   |                     | I <sub>OUT</sub> = 100 mA  | —    | 0.3  | 0.5  |                   |
| Average temperature coefficient of output voltage | T <sub>CVO</sub>    | V <sub>IN</sub> = 4.0 V, I <sub>OUT</sub> = 5 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C                 | —    | 0.35 | —    | mV/°C             |

**TA48L025F**
**Electrical Characteristics**

 (C<sub>IN</sub> = 0.33 μF, C<sub>OUT</sub> = 3.3 μF, T<sub>j</sub> = 25°C, unless otherwise specified)

| Characteristics                                   | Symbol              | Test Conditions  | Min   | Typ. | Max   | Unit              |
|---|---------------------|--|-------|------|-------|-------------------|
| Output voltage                                    | V <sub>OUT</sub>    | V <sub>IN</sub> = 4.5 V, I <sub>OUT</sub> = 40 mA  | 2.425 | 2.5  | 2.575 | V                 |
|   |                     | 3.5 V ≤ V <sub>IN</sub> ≤ 12 V, 5 mA ≤ I <sub>OUT</sub> ≤ 100 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C | 2.375 | 2.5  | 2.625 |                   |
| Line regulation                                   | Reg · line          | 3.5 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA                                       | —     | 2    | 20    | mV                |
| Load regulation                                   | Reg · load          | V <sub>IN</sub> = 4.5 V, 5 mA ≤ I <sub>OUT</sub> ≤ 150 mA                                      | —     | 18   | 40    | mV                |
| Quiescent current                                 | I <sub>B</sub>      | 3.5 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 0 A   | —     | 0.4  | 0.8   | mA                |
|   |                     | 3.5 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 100 mA                                      | —     | 1    | 5     |                   |
| Starting quiescent current                        | I <sub>Bstart</sub> | V <sub>IN</sub> = 2.4 V, I <sub>OUT</sub> = 0 A  | —     | 0.5  | 1.5   | mA                |
|   |                     | V <sub>IN</sub> = 2.4 V, I <sub>OUT</sub> = 100 mA   | —     | 7    | 20    |                   |
| Output noise voltage                              | V <sub>NO</sub>     | V <sub>IN</sub> = 4.5 V, I <sub>OUT</sub> = 40 mA, 10 Hz ≤ f ≤ 100 kHz                         | —     | 65   | —     | μV <sub>rms</sub> |
| Ripple rejection                                  | R.R.                | 3.5 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA, f = 120 Hz                           | 52    | 70   | —     | dB                |
| Dropout voltage                                   | V <sub>D</sub>      | I <sub>OUT</sub> = 40 mA   | —     | 0.16 | 0.35  | V                 |
|   |                     | I <sub>OUT</sub> = 100 mA  | —     | 0.27 | 0.5   |                   |
| Average temperature coefficient of output voltage | T <sub>CVO</sub>    | V <sub>IN</sub> = 4.5 V, I <sub>OUT</sub> = 5 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C                 | —     | 0.45 | —     | mV/°C             |

**TA48L03F**
**Electrical Characteristics**

 (C<sub>IN</sub> = 0.33 μF, C<sub>OUT</sub> = 3.3 μF, T<sub>j</sub> = 25°C, unless otherwise specified)

| Characteristics                                   | Symbol              | Test Conditions  | Min  | Typ. | Max  | Unit              |
|---|---------------------|--|------|------|------|-------------------|
| Output voltage                                    | V <sub>OUT</sub>    | V <sub>IN</sub> = 5.0 V, I <sub>OUT</sub> = 40 mA  | 2.91 | 3.0  | 3.09 | V                 |
|   |                     | 4.0 V ≤ V <sub>IN</sub> ≤ 12 V, 5 mA ≤ I <sub>OUT</sub> ≤ 100 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C | 2.85 | 3.0  | 3.15 |                   |
| Line regulation                                   | Reg · line          | 4.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA                                       | —    | 2    | 20   | mV                |
| Load regulation                                   | Reg · load          | V <sub>IN</sub> = 5.0 V, 5 mA ≤ I <sub>OUT</sub> ≤ 150 mA                                      | —    | 18   | 40   | mV                |
| Quiescent current                                 | I <sub>B</sub>      | 4.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 0 A   | —    | 0.4  | 0.8  | mA                |
|   |                     | 4.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 100 mA                                      | —    | 1    | 5    |                   |
| Starting quiescent current                        | I <sub>Bstart</sub> | V <sub>IN</sub> = 2.8 V, I <sub>OUT</sub> = 0 A  | —    | 0.5  | 1.5  | mA                |
|   |                     | V <sub>IN</sub> = 2.8 V, I <sub>OUT</sub> = 100 mA   | —    | 7    | 20   |                   |
| Output noise voltage                              | V <sub>NO</sub>     | V <sub>IN</sub> = 5.0 V, I <sub>OUT</sub> = 40 mA, 10 Hz ≤ f ≤ 100 kHz                         | —    | 80   | —    | μV <sub>rms</sub> |
| Ripple rejection                                  | R.R.                | 4.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA, f = 120 Hz                           | 50   | 68   | —    | dB                |
| Dropout voltage                                   | V <sub>D</sub>      | I <sub>OUT</sub> = 40 mA   | —    | 0.16 | 0.35 | V                 |
|   |                     | I <sub>OUT</sub> = 100 mA  | —    | 0.27 | 0.5  |                   |
| Average temperature coefficient of output voltage | T <sub>CVO</sub>    | V <sub>IN</sub> = 5 V, I <sub>OUT</sub> = 5 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C                   | —    | 0.5  | —    | mV/°C             |

**TA48L033F**
**Electrical Characteristics**

 (C<sub>IN</sub> = 0.33 μF, C<sub>OUT</sub> = 3.3 μF, T<sub>j</sub> = 25°C, unless otherwise specified)

| Characteristics                                   | Symbol              | Test Conditions  | Min   | Typ. | Max   | Unit  |
|---|---------------------|--|-------|------|-------|-------|
| Output voltage                                    | V <sub>OUT</sub>    | V <sub>IN</sub> = 5.3 V, I <sub>OUT</sub> = 40 mA  | 3.2   | 3.3  | 3.4   | V     |
|   |                     | 4.3 V ≤ V <sub>IN</sub> ≤ 12 V, 5 mA ≤ I <sub>OUT</sub> ≤ 100 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C | 3.135 | 3.3  | 3.465 |       |
| Line regulation                                   | Reg · line          | 4.3 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA                                       | —     | 2    | 20    | mV    |
| Load regulation                                   | Reg · load          | V <sub>IN</sub> = 5.3 V, 5 mA ≤ I <sub>OUT</sub> ≤ 150 mA                                      | —     | 18   | 40    | mV    |
| Quiescent current                                 | I <sub>B</sub>      | 4.3 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 0 A   | —     | 0.4  | 0.8   | mA    |
|   |                     | 4.3 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 100 mA                                      | —     | 1    | 5     |       |
| Starting quiescent current                        | I <sub>Bstart</sub> | V <sub>IN</sub> = 3.0 V, I <sub>OUT</sub> = 0 A  | —     | 0.5  | 1.5   | mA    |
|   |                     | V <sub>IN</sub> = 3.0 V, I <sub>OUT</sub> = 100 mA   | —     | 7    | 20    |       |
| Output noise voltage                              | V <sub>NO</sub>     | V <sub>IN</sub> = 5.3 V, I <sub>OUT</sub> = 40 mA, 10 Hz ≤ f ≤ 100 kHz                         | —     | 85   | —     | μVrms |
| Ripple rejection                                  | R.R.                | 4.3 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA, f = 120 Hz                           | 50    | 68   | —     | dB    |
| Dropout voltage                                   | V <sub>D</sub>      | I <sub>OUT</sub> = 40 mA   | —     | 0.16 | 0.35  | V     |
|   |                     | I <sub>OUT</sub> = 100 mA  | —     | 0.27 | 0.5   |       |
| Average temperature coefficient of output voltage | T <sub>CVO</sub>    | V <sub>IN</sub> = 5.3 V, I <sub>OUT</sub> = 5 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C                 | —     | 0.55 | —     | mV/°C |

**TA48L05F**
**Electrical Characteristics**

 (C<sub>IN</sub> = 0.33 μF, C<sub>OUT</sub> = 3.3 μF, T<sub>j</sub> = 25°C, unless otherwise specified)


| Characteristics                                   | Symbol              | Test Conditions  | Min  | Typ. | Max  | Unit  |
|---|---------------------|--|------|------|------|-------|
| Output voltage                                    | V <sub>OUT</sub>    | V <sub>IN</sub> = 7.0 V, I <sub>OUT</sub> = 40 mA  | 4.85 | 5.0  | 5.15 | V     |
|   |                     | 6.0 V ≤ V <sub>IN</sub> ≤ 12 V, 5 mA ≤ I <sub>OUT</sub> ≤ 100 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C | 4.75 | 5.0  | 5.25 |       |
| Line regulation                                   | Reg · line          | 6.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA                                       | —    | 2    | 20   | mV    |
| Load regulation                                   | Reg · load          | V <sub>IN</sub> = 7.0 V, 5 mA ≤ I <sub>OUT</sub> ≤ 150 mA                                      | —    | 18   | 45   | mV    |
| Quiescent current                                 | I <sub>B</sub>      | 6.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 0 A   | —    | 0.4  | 0.8  | mA    |
|   |                     | 6.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 100 mA                                      | —    | 1    | 5    |       |
| Starting quiescent current                        | I <sub>Bstart</sub> | V <sub>IN</sub> = 4.5V, I <sub>OUT</sub> = 0 A   | —    | 0.5  | 1.5  | mA    |
|   |                     | V <sub>IN</sub> = 4.5 V, I <sub>OUT</sub> = 100 mA   | —    | 7    | 20   |       |
| Output noise voltage                              | V <sub>NO</sub>     | V <sub>IN</sub> = 7.0V, I <sub>OUT</sub> = 40 mA, 10 Hz ≤ f ≤ 100 kHz                          | —    | 135  | —    | μVrms |
| Ripple rejection                                  | R.R.                | 6.0 V ≤ V <sub>IN</sub> ≤ 12 V, I <sub>OUT</sub> = 40 mA, f = 120 Hz                           | 50   | 64   | —    | dB    |
| Dropout voltage                                   | V <sub>D</sub>      | I <sub>OUT</sub> = 40 mA   | —    | 0.16 | 0.35 | V     |
|   |                     | I <sub>OUT</sub> = 100 mA  | —    | 0.27 | 0.5  |       |
| Average temperature coefficient of output voltage | T <sub>CVO</sub>    | V <sub>IN</sub> = 7.0 V, I <sub>OUT</sub> = 5 mA, 0°C ≤ T <sub>j</sub> ≤ 125°C                 | —    | 0.85 | —    | mV/°C |

## Electrical Characteristics for All Products

Generally, the characteristics of power supply ICs change according to temperature fluctuations.







The specification  $T_j = 25^\circ\text{C}$  is based on a state where temperature increase has no effect (assuming no fluctuation in the characteristics) as ascertained by pulse tests.







## Standard Application Circuit

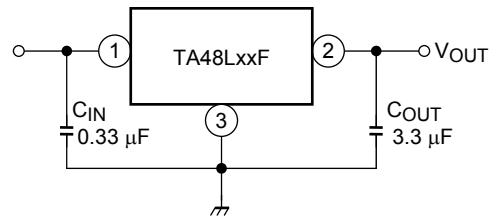

Be sure to connect a capacitor near the input terminal and output terminal between both terminals and GND.

The capacitances should be determined experimentally. In particular, adequate investigation should be made so that there is no problem even in high or low temperatures.

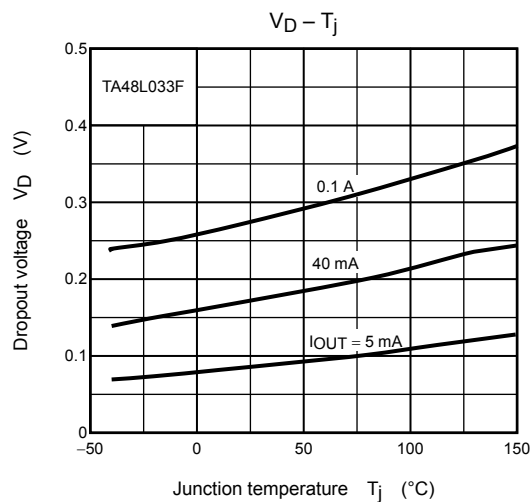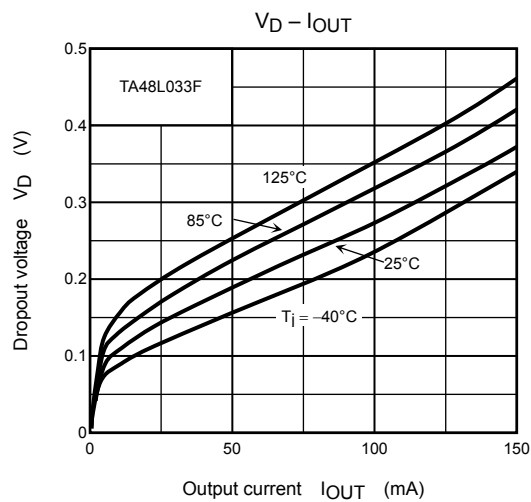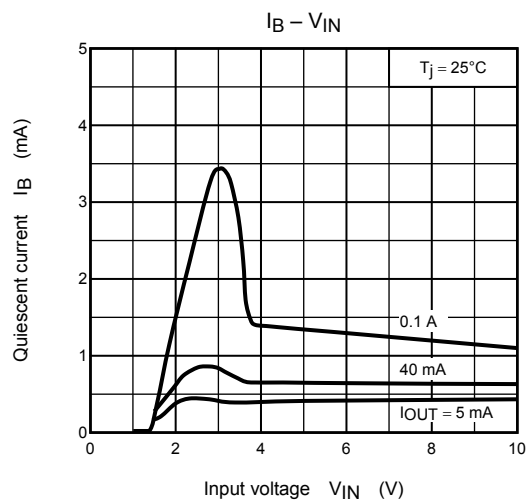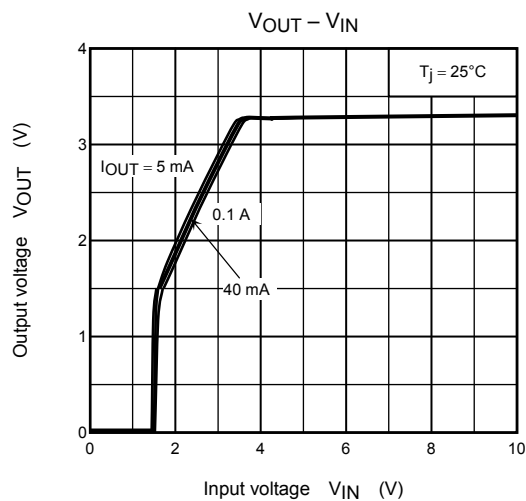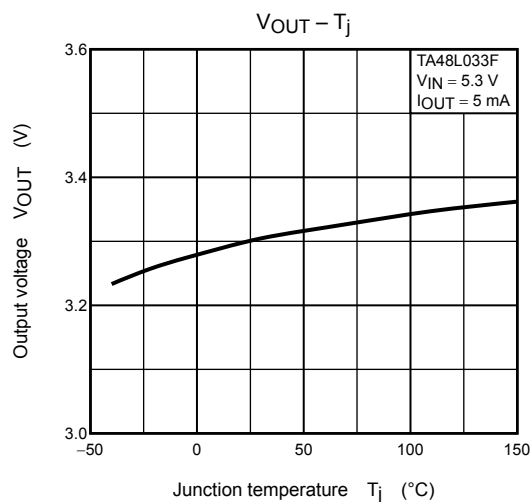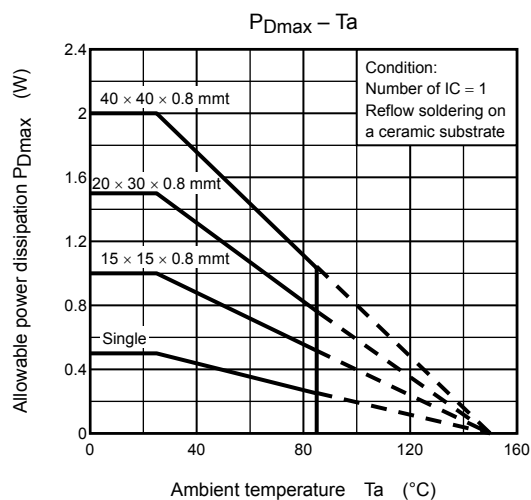

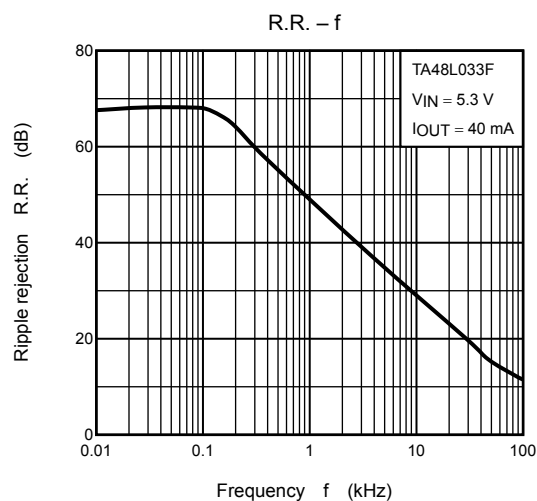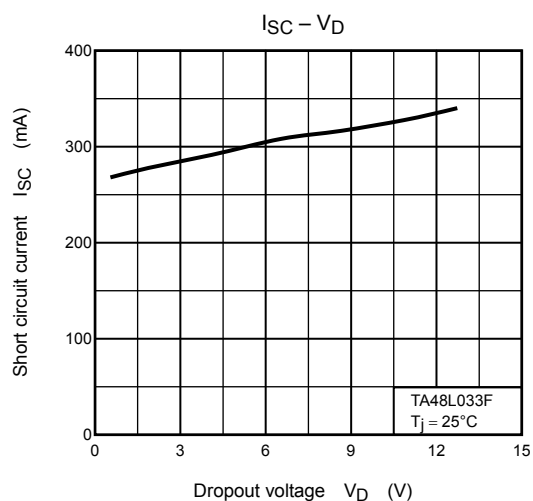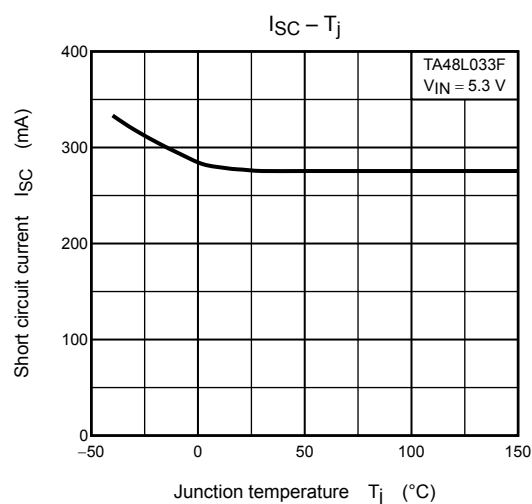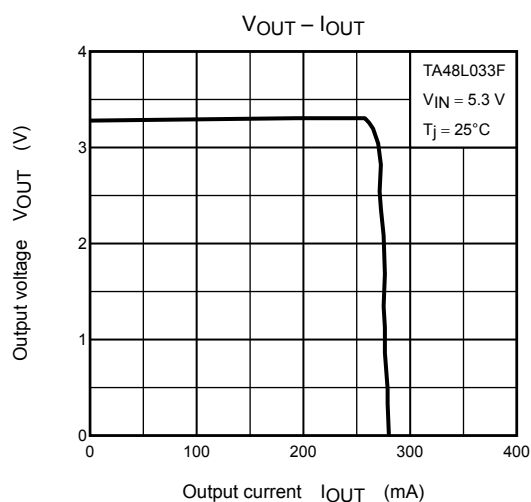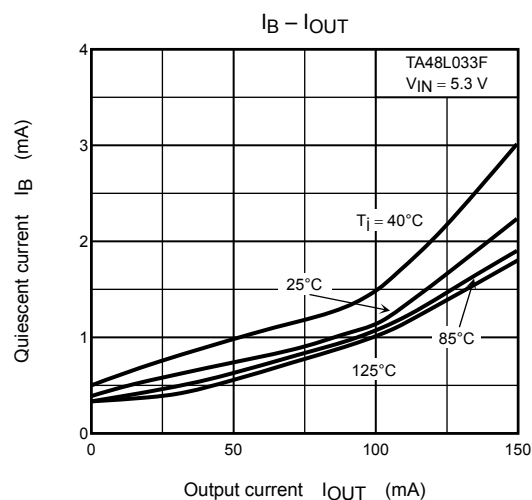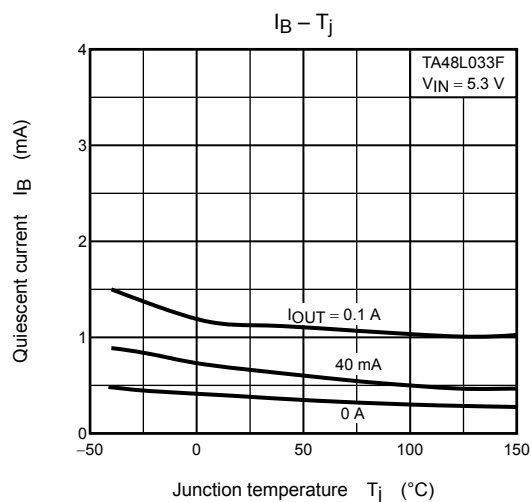




## Package Dimensions

HSOP3-P-1.50

Unit : mm

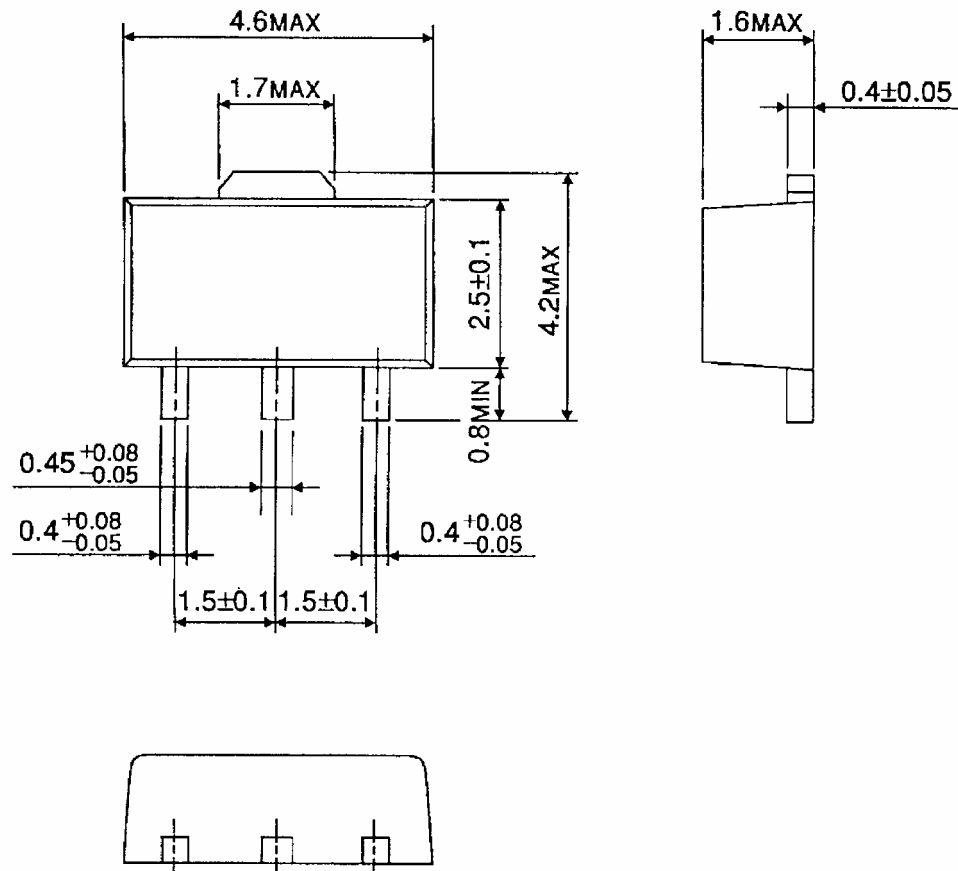

Weight: 0.05 g (typ.)

**RESTRICTIONS ON PRODUCT USE**

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.