



AlGaAs Infrared Laser Diode

ADL-78901TL

★780nm, 90mW Power Reliable Operation



200mW High Power Pulse Reliable Operation

Features

1. Small aspect ratio
2. High COD level

•Applications

1. Virtual keyboard
2. CD R/RW

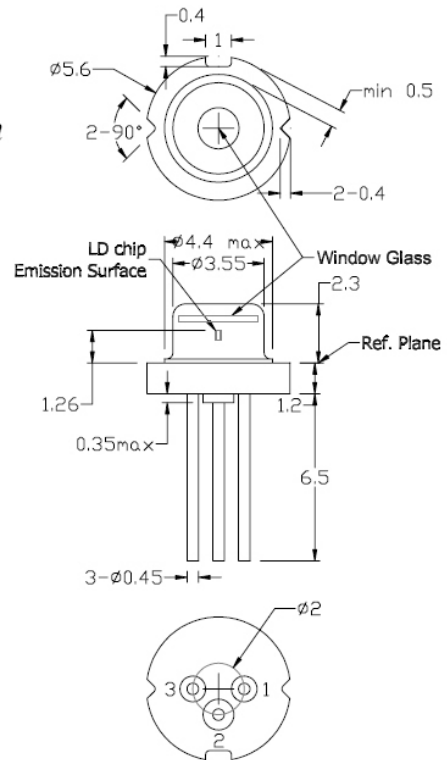

•Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P _O	CW	100	mW
	P _{op}	Pulsed*	220	
Reverse voltage(LD)	V _{RL}	-	2	V
Case temperature	T _C	-	-10~+70	°C
Storage temperature	T _S	-	-40~+85	°C

* Pulse width 0.5us, duty cycle 50%

•Electrical and optical characteristics (T_c=25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions (CW)
Peak wavelength	λ	775	785	795	nm	P _O =90mW
Threshold current	I _{th}	25	35	55	mA	P _O :1-10mW
Operating current	I _{op}	90	115	160	mA	P _O =90mW
Operating voltage	V _{op}	1.5	2	2.2	V	P _O =90mW
Monitor Current	I _m	0.1	0.3	0.7	mA	P _O =90mW, V _r =5V
Differential efficiency	η	0.8	1.1	1.3	mW/mA	P _O =80-90mW
Parallel divergence angle	$\theta_{ }$	7.5	9	10	deg	P _O =90mW
Perpendicular divergence angle	$\theta_{\perp}$	15	17	19	deg	
Parallel FFP deviation angle	$\Delta\theta_{ }$	-2	0	+2	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-2	0	+2	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	+80	um	

• Precautions

- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product



ROITHNER LASERTECHNIK

Wiedner Hauptstraße 76, A-1040 Vienna, Austria

Tel.: ++43 1 586 52 43-0, Fax -44, office@roithner-laser.com



AlGaAs Infrared Laser Diode

ADL-78901TL

