



# Dual Ultrafast Soft Recovery Rectifiers

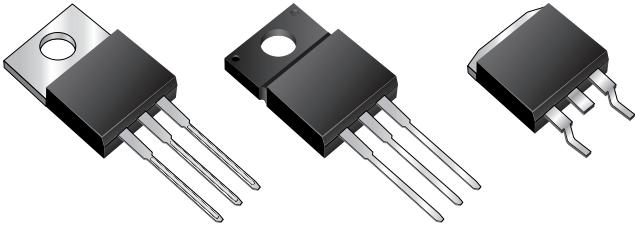


## TO-220AB (BYQ28E, UG10 Series)

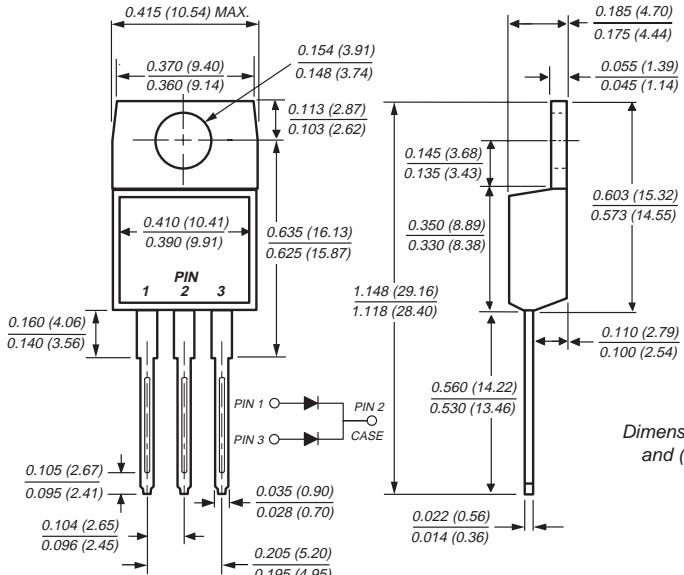

*Dimensions in inches  
and (millimeters)*

# Mounting Pad Layout TO-263AB

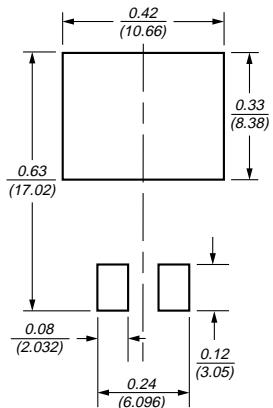


## Features


- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
  - High reverse energy capability
  - Excellent high temperature switching
  - High temperature soldering guaranteed: 250°C/10 seconds at terminals
  - Glass passivated chip junction
  - Soft recovery characteristics

**Reverse Voltage** 100 to 200 V  
**Forward Current** 10 A  
**Reverse Recovery Time** 20ns

## **ITO-220AB (BYQ28EF, UGF10 Series)**

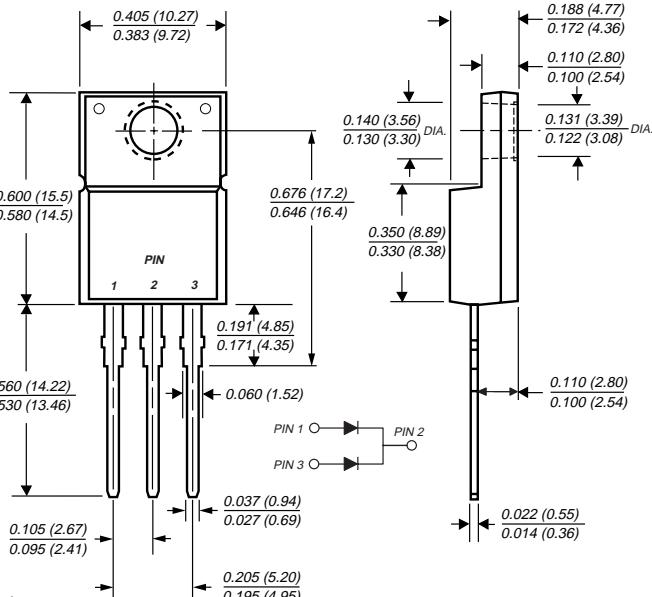

#### TO-263AB (BYQ28EB, UGB10 Series)

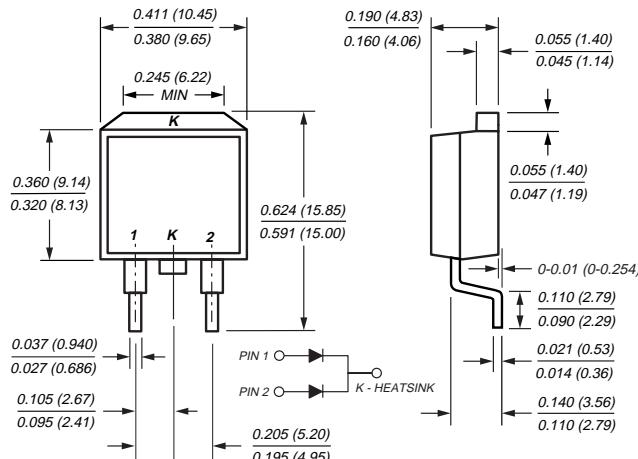

## Mechanical Data

**Case:** JEDEC TO-220AB, ITO-220AB & TO-263AB  
molded plastic body

**Terminals:** Plated leads, solderable per MIL-STD-750, Method 2026

**Polarity:** As marked    **Mounting Position:** Any

**Mounting Torque:** 10 in-lbs maximum

**Weight:** 0.08 oz., 2.24 g

**Maximum Ratings** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	UG10BCT	UG10CCT	UG10DCT	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	100	150	200	V
Working peak reverse voltage	$V_{RWM}$	100	150	200	V
Maximum DC blocking voltage	$V_{DC}$	100	150	200	V
Maximum average forward rectified current at $T_C = 100^\circ\text{C}$	$I_F(\text{AV})$	10	5		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	$I_{FSM}$		55		A
Non-repetitive peak reverse current per leg at $t_p = 100\mu\text{s}$	$I_{RSM}$		0.2		A
Electrostatic discharge capacitor voltage, Human body model: $C = 250\text{pF}$ , $R = 1.5\text{k}\Omega$	$V_C$		8		KV
Operating junction and storage temperature range	$T_J, T_{STG}$		-40 to +150		°C
RMS Isolation voltage (BYQ28EF, UGF types) from terminals to heatsink with $t = 1$ second, $\text{RH} \leq 30\%$	$V_{ISOL}$		4500 (NOTE 1) 3500 (NOTE 2) 1500 (NOTE 3)		V

**Electrical Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Value		Unit
Maximum instantaneous forward voltage per leg (Note 4) at $I_F = 10\text{A}$ , $T_J = 25^\circ\text{C}$	$V_F$	1.25		
at $I_F = 5\text{A}$ , $T_J = 25^\circ\text{C}$		1.10		
at $I_F = 5\text{A}$ , $T_J = 150^\circ\text{C}$		0.895		V
Maximum reverse current per leg at working peak reverse voltage (Note 4)	$I_R$	10	200	μA
Maximum reverse recovery time per leg at $I_F = 1.0\text{A}$ , $dI/dt = 100\text{A}/\mu\text{s}$ , $V_R = 30\text{V}$ , $I_{RR} = 0.1 I_{RM}$	$t_{rr}$	25		ns
Maximum reverse recovery time per leg at $I_F = 0.5\text{A}$ , $I_R = 1.0\text{A}$ , $I_{RR} = 0.25\text{A}$	$t_{rr}$	20		ns
Maximum stored charge per leg $I_F = 2\text{A}$ , $dI/dt = 20\text{A}/\mu\text{s}$ , $V_R = 30\text{V}$ , $I_{RR} = 0.1 I_{RM}$	$Q_{RR}$	9		nC

**Thermal Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	UG10	UGF10	UGB10	
Typical thermal resistance — junction to ambient per leg	$R_{\theta JA}$	50	55	50	°C/W
— junction to case	$R_{\theta JC}$	4.5	6.7	4.5	°C/W
Parameter	Symbol	BYQ28E	BYQ28EF	BYQ28EB	Unit

**Notes:**

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is  $\leq 4.9\text{ mm}$  (0.19")
- (4) Pulse test: 300μs pulse width, 1% duty cycle

## Ratings and Characteristic Curves

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

