


## isc Triacs

## BTA20-600

### FEATURES

- With TO-220AB insulated package
- Suitable for general purpose where high surge current capability is required. Application such as phase control and static switching on inductive or resistive load.

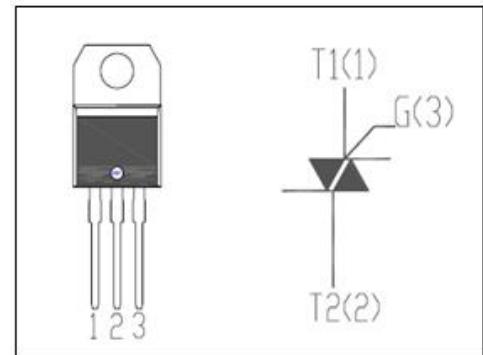

### ABSOLUTE MAXIMUM RATINGS(T<sub>a</sub>=25°C)

SYMBOL	PARAMETER	MIN	UNIT
V <sub>DRM</sub>	Repetitive peak off-state voltage	600	V
V <sub>RRM</sub>	Repetitive peak off-state voltage	600	V
I <sub>T(RMS)</sub>	RMS on-state current (full sine wave) T <sub>j</sub> =70°C	20	A
I <sub>TSM</sub>	Non-repetitive peak on-state current t <sub>p</sub> =10ms	210	A
T <sub>j</sub>	Operating junction temperature	125	°C
T <sub>stg</sub>	Storage temperature	-40~150	°C
R <sub>th(j-c)</sub>	Thermal resistance, junction to case	2.1	°C/W
R <sub>th(j-a)</sub>	Thermal resistance, junction to ambient	60	°C/W

### ELECTRICAL CHARACTERISTICS (T<sub>c</sub>=25°C unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
I <sub>RRM</sub>	Repetitive peak reverse current	V <sub>R</sub> =V <sub>RRM</sub> , T <sub>j</sub> =25°C V <sub>R</sub> =V <sub>RRM</sub> , T <sub>j</sub> =125°C	0.01 3.0	mA
I <sub>DRM</sub>	Repetitive peak off-state current	V <sub>D</sub> =V <sub>DRM</sub> , T <sub>j</sub> =25°C V <sub>D</sub> =V <sub>DRM</sub> , T <sub>j</sub> =125°C	0.01 3.0	mA
I <sub>GT</sub>	Gate trigger current	V <sub>D</sub> =12V; R <sub>L</sub> = 33 Ω	50	mA
			50	
			50	
			100	
I <sub>H</sub>	Holding current	I <sub>GT</sub> = 0.5A, Gate Open	75	mA
V <sub>GT</sub>	Gate trigger voltage all quadrant	V <sub>D</sub> =12V; R <sub>L</sub> = 33 Ω	1.5	V
V <sub>TM</sub>	On-state voltage	I <sub>T</sub> = 28A; t <sub>p</sub> = 380 μ s	1.7	V