



# BTA24, BTB24, BTA25, BTA26 and T25 series

KERSEMI ELECTRONIC CO.,LTD.

Snubberless™ and Standard 25 A Triacs

## Main features

Symbol	Value	Unit
$I_T(\text{RMS})$	25	A
$V_{\text{DRM}}/V_{\text{RRM}}$	600 and 800	V
$I_{\text{GT}}(Q_1)$	35 to 50	mA

## Description

Available either in through-hole or surface-mount packages, the **BTA24**, **BTB24**, **BTA25**, **BTA26** and **T25** triac series is suitable for general purpose AC switching. They can be used as an ON/OFF function in applications such as static relays, heating regulation, induction motor starting circuits... or for phase control operation in light dimmers, motor speed controllers, ...

The snubberless versions (BTA/BTB...W and T25 series) are specially recommended for use on inductive loads, thanks to their high commutation performances. By using an internal ceramic pad, the BTA series provides voltage insulated tab (rated at 2500V<sub>RMS</sub>) complying with UL standards (File ref.: E81734).

## Order codes

Part Number	Marking
BTA24-xxxxxRG	See <i>Table 6 on page 6</i>
BTB24-xxxxxRG	
BTA25-xxxxxRG	
BTA26-xxxxxRG	
T25xx-xxxG	
T25xx-xxxG-TR	

TO-220AB Insulated  
(BTA24)




TO-220AB  
(BTB24)




RD91  
(BTA25)



TOP3 Insulated  
(BTA26)



D<sup>2</sup>PAK  
(T25-G)





# BTA24, BTB24, BTA25, BTA26 and T25 series

**Table 1. Absolute maximum ratings**

Symbol	Parameter	Value	Unit
$I_{T(RMS)}$	D <sup>2</sup> PAK / TO-220AB	25	A
	RD91 / TOP3 Ins.		
	TO-220AB Ins.		
$I_{TSM}$	F = 50 Hz	t = 20 ms	250
	F = 60 Hz	t = 16.7 ms	
$I^2t$	$I^2t$ Value for fusing	$t_p = 10 \text{ ms}$	340
$dI/dt$	Critical rate of rise of on-state current $I_G = 2 \times I_{GT}, t_r \leq 100 \text{ ns}$	F = 120 Hz $T_j = 125^\circ \text{ C}$	50
$V_{DSM}/V_{RSM}$	Non repetitive surge peak off-state voltage	$t_p = 10 \text{ ms}$ $T_j = 25^\circ \text{ C}$	$V_{DSM}/V_{RSM} + 100$
$I_{GM}$	Peak gate current	$t_p = 20 \mu\text{s}$ $T_j = 125^\circ \text{ C}$	4
$P_{G(AV)}$	Average gate power dissipation	$T_j = 125^\circ \text{ C}$	1
$T_{stg}$ $T_j$	Storage junction temperature range Operating junction temperature range		- 40 to + 150 - 40 to + 125

**Table 2. Electrical characteristics ( $T_j = 25^\circ \text{ C}$ , unless otherwise specified), Snubberless™ and Logic Level (3 quadrants) T25-G, BTA/BTB24...W, BTA25...W, BTA26...W**

Symbol	Test Conditions	Quadrant		T25	BTA/BTB		Unit
				T2535	CW	BW	
$I_{GT}^{(1)}$	$V_D = 12 \text{ V}$ $R_L = 33 \Omega$	I - II - III	MAX.	35	35	50	mA
$V_{GT}$		I - II - III	MAX.		1.3		V
$V_{GD}$	$V_D = V_{DRM}$ $R_L = 3.3 \text{ k}\Omega$ $T_j = 125^\circ \text{ C}$	I - II - III	MIN.		0.2		V
$I_H^{(2)}$	$I_T = 500 \text{ mA}$		MAX.	50	50	75	mA
$I_L$	$I_G = 1.2 I_{GT}$	I - III	MAX.	70	70	80	mA
		II		80	80	100	
$dV/dt^{(2)}$	$V_D = 67 \% V_{DRM}$ gate open	$T_j = 125^\circ \text{ C}$	MIN.	500	500	1000	V/ $\mu\text{s}$
$(dI/dt)c^{(2)}$	Without snubber	$T_j = 125^\circ \text{ C}$	MIN.	13	13	22	A/ms

1. minimum  $I_{GT}$  is guaranteed at 5% of  $I_{GT}$  max.

2. for both polarities of A2 referenced to A1.

**Table 3. Electrical characteristics ( $T_j = 25^\circ C$ , unless otherwise specified), Standard (4 quadrants), BTB24...B, BTA25...B, BTA26...B**

Symbol	Test Conditions	Quadrant		Value	Unit
$I_{GT}^{(1)}$	$V_D = 12 V$ $R_L = 33 \Omega$	I - II - III - IV	MAX.	50 100	mA
$V_{GT}$		ALL	MAX.	1.3	V
$V_{GD}$	$V_D = V_{DRM}$ $R_L = 3.3 k\Omega$ $T_j = 125^\circ C$	ALL	MIN.	0.2	V
$I_H^{(2)}$	$I_T = 500 mA$		MAX.	80	mA
$I_L$	$I_G = 1.2 I_{GT}$	I - III - IV	MAX.	70	mA
		II		160	
$dV/dt^{(2)}$	$V_D = 67 \% V_{DRM}$ gate open	$T_j = 125^\circ C$	MIN.	500	V/ $\mu$ s
$(dV/dt)c^{(2)}$	$(dl/dt)c = 13.3 A/ms$	$T_j = 125^\circ C$	MIN.	10	V/ $\mu$ s

1. minimum  $I_{GT}$  is guaranteed at 5% of  $I_{GT}$  max.

2. for both polarities of A2 referenced to A1.

**Table 4. Static characteristics**

Symbol	Test Conditions			Value	Unit	
$V_T^{(1)}$	$I_{TM} = 35 A$	$t_p = 380 \mu s$	$T_j = 25^\circ C$	MAX.	1.55	V
$V_{t0}^{(1)}$	Threshold voltage		$T_j = 125^\circ C$	MAX.	0.85	V
$R_d^{(1)}$	Dynamic resistance		$T_j = 125^\circ C$	MAX.	16	$m\Omega$
$I_{DRM}$ $I_{RRM}$	$V_{DRM} = V_{RRM}$	$T_j = 25^\circ C$	MAX.	5	$\mu A$	
		$T_j = 125^\circ C$		3	mA	


1. for both polarities of A2 referenced to A1.

**Table 5. Thermal resistance**


Symbol	Parameter			Value	Unit
$R_{th(j-c)}$	Junction to case (AC)	$D^2PAK / TO-220AB$		0.8	$^\circ C/W$
		RD91 (Insulated) / TOP3 Insulated		1.1	
		TO-220AB Insulated		1.7	
$R_{th(j-a)}$	Junction to ambient	$D^2PAK$		45	$^\circ C/W$
		TOP3 Insulated		50	
		TO-220AB / TO-220AB Insulated		60	

1. S = Copper surface under tab.


**Figure 1. Maximum power dissipation versus RMS on-state current (full cycle)**

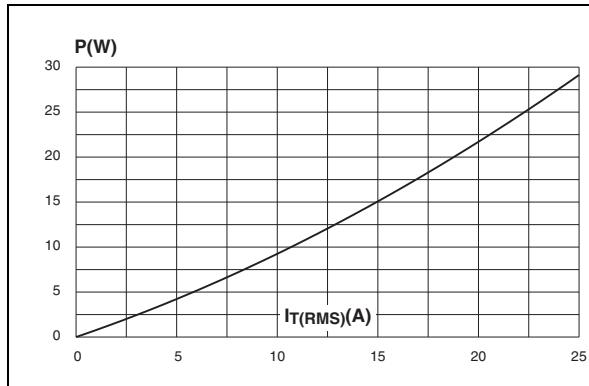


**Figure 2. RMS on-state current versus case temperature (full cycle)**

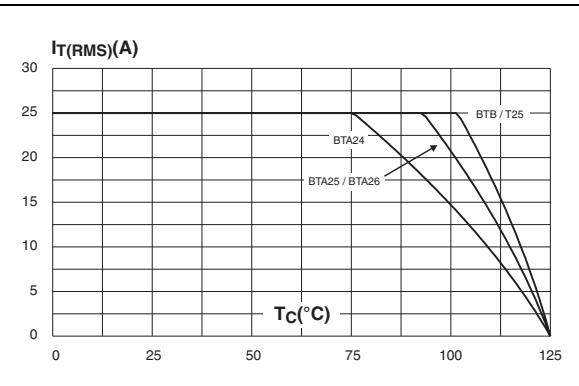


**Figure 3. D<sup>2</sup>PAK RMS on-state current versus ambient temperature (printed circuit board FR4, copper thickness: 35µm) (full cycle)**

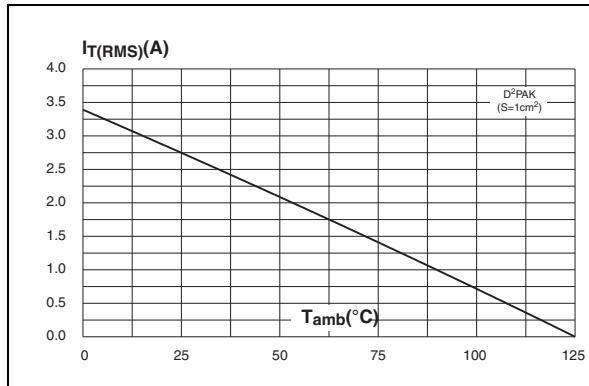


**Figure 4. Relative variation of thermal impedance versus pulse duration**

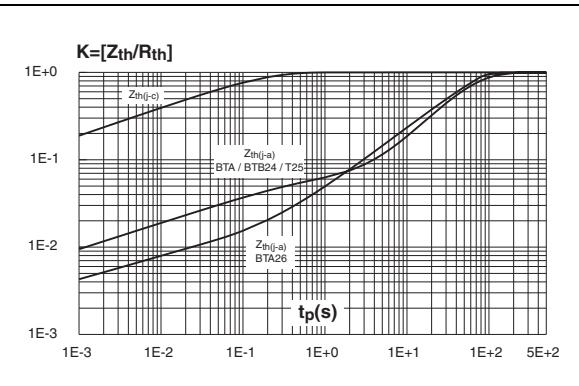


**Figure 5. On-state characteristics (maximum values)**

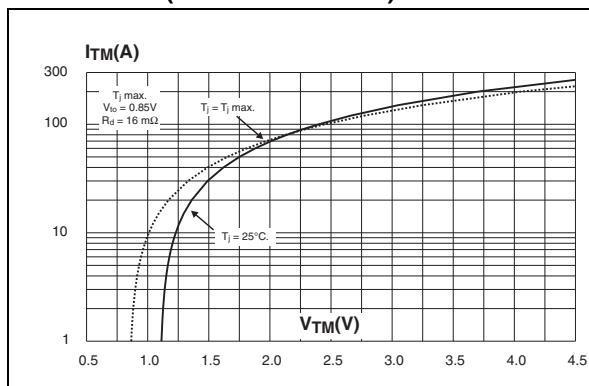


**Figure 6. Surge peak on-state current versus number of cycles**

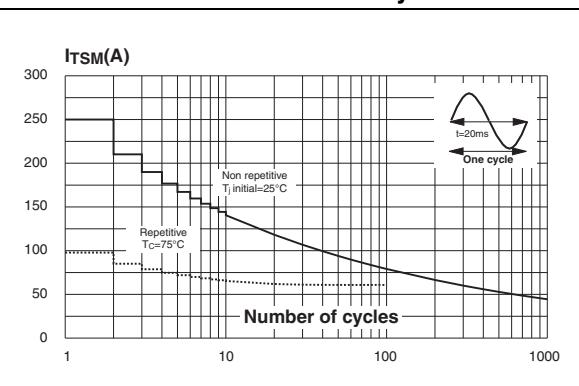


**Figure 7.** Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 10$  ms and corresponding value of  $I^2t$

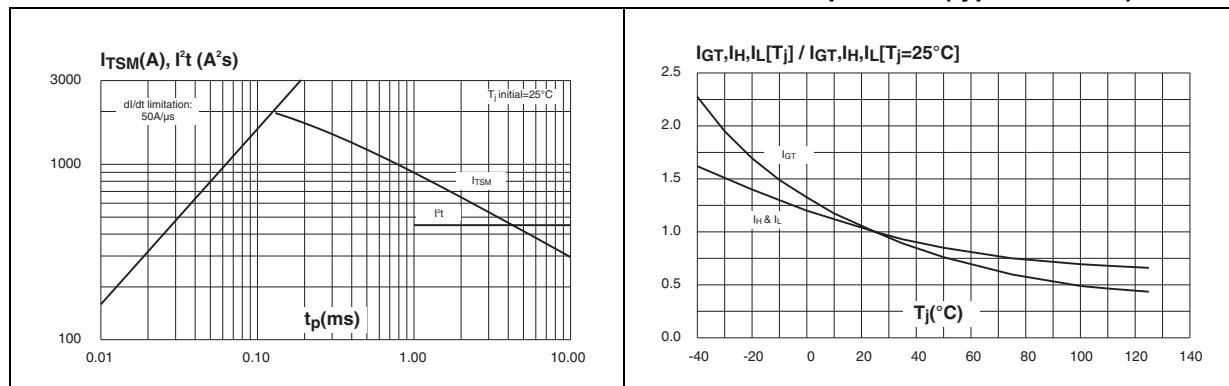


**Figure 9.** Relative variation of critical rate of decrease of main current versus  $(dV/dt)c$  (typical values)

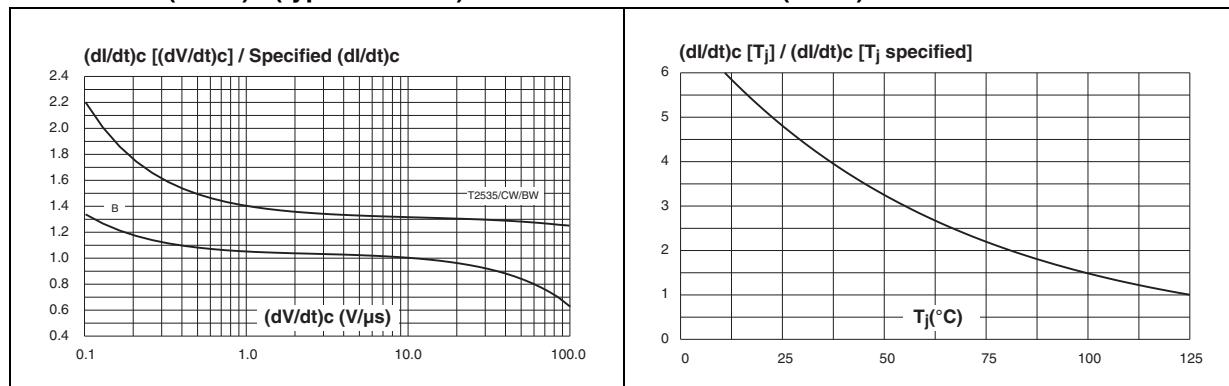


**Figure 11.** D<sup>2</sup>PAK Thermal resistance junction to ambient versus copper surface under tab (printed circuit board FR4, copper thickness: 35 μm)

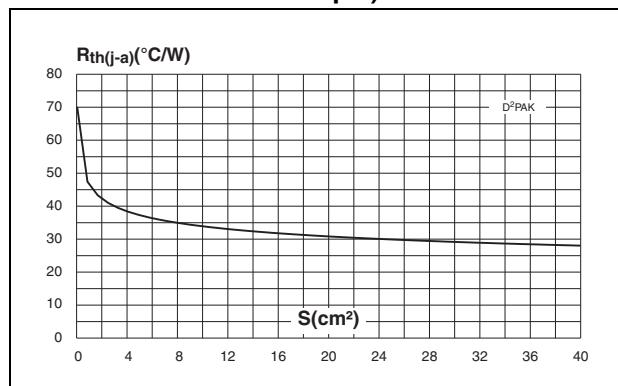

**Figure 8.** Relative variation of gate trigger current, holding current and latching current versus junction temperature (typical values)

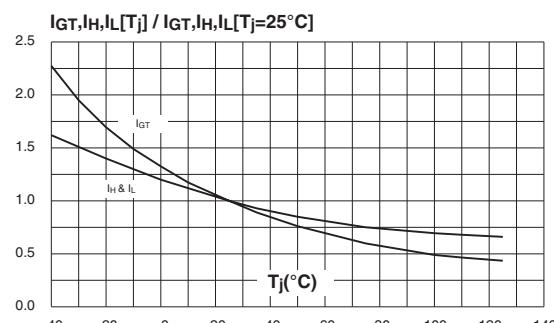


**Figure 10.** Relative variation of critical rate of decrease of main current versus  $(dV/dt)$

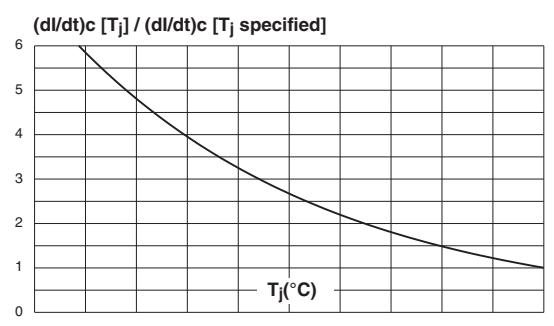


## 2 Ordering information scheme

**Figure 12. BTA and BTB series**

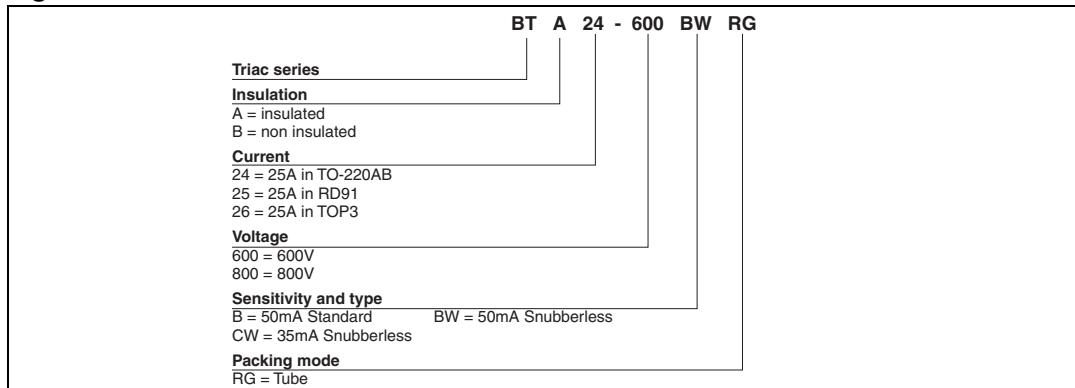

**Figure 13. T25 series**

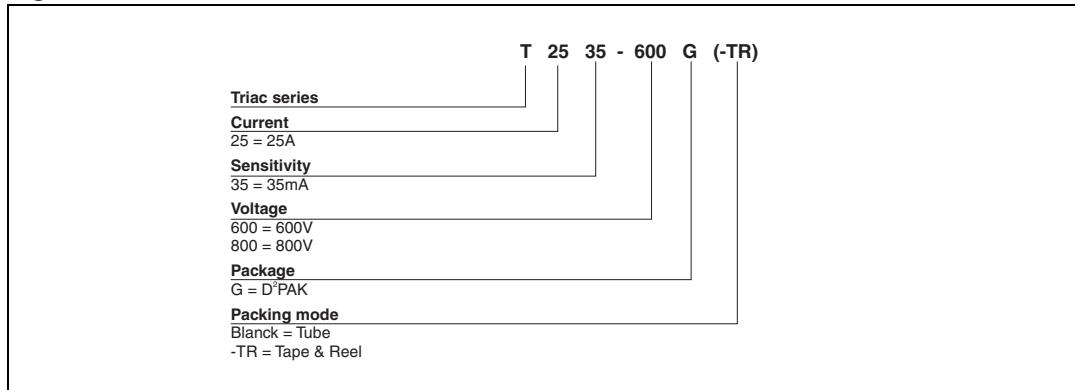

**Table 6. Product Selector**

Part Numbers	Voltage (xxx)		Sensitivity	Type	Package
	600 V	800 V			
BTA24-xxxBRG	X	X	50 mA	Standard	TO-220AB
BTA/BTB <sup>(1)</sup> 24-xxxBWRG	X	X	50 mA	Snubberless	TO-220AB
BTA/BTB <sup>(1)</sup> 24-xxxCWRG	X	X	35 mA	Snubberless	TO-220AB
BTA25-xxxBRG	X	X	50 mA	Standard	RD91
BTA25-xxxBWRG	X	X	50 mA	Snubberless	RD91
BTA25-xxxCWRG	X	X	35 mA	Snubberless	RD91
BTA26-xxxBRG	X	X	50 mA	Standard	TOP3 Ins.
BTA26-xxxBWRG	X	X	50 mA	Snubberless	TOP3 Ins.
BTA26-xxxCWRG	X	X	35 mA	Snubberless	TOP3 Ins.
T2535-xxxG	X	X	35 mA	Snubberless	D <sup>2</sup> PAK


1. **BTB:** non insulated TO-220AB package

### 3 Package information

**Table 7. D<sup>2</sup>PAK Package dimensions**

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.30		4.60	0.169		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.70		0.93	0.027		0.037
B2	1.25	1.40		0.048	0.055	
C	0.45		0.60	0.017		0.024
C2	1.21		1.36	0.047		0.054
D	8.95		9.35	0.352		0.368
E	10.00		10.28	0.393		0.405
G	4.88		5.28	0.192		0.208
L	15.00		15.85	0.590		0.624
L2	1.27		1.40	0.050		0.055
L3	1.40		1.75	0.055		0.069
R		0.40			0.016	
V2	0°		8°	0°		8°

**Figure 14. D<sup>2</sup>PAK Foot Print Dimensions (in millimeters)**

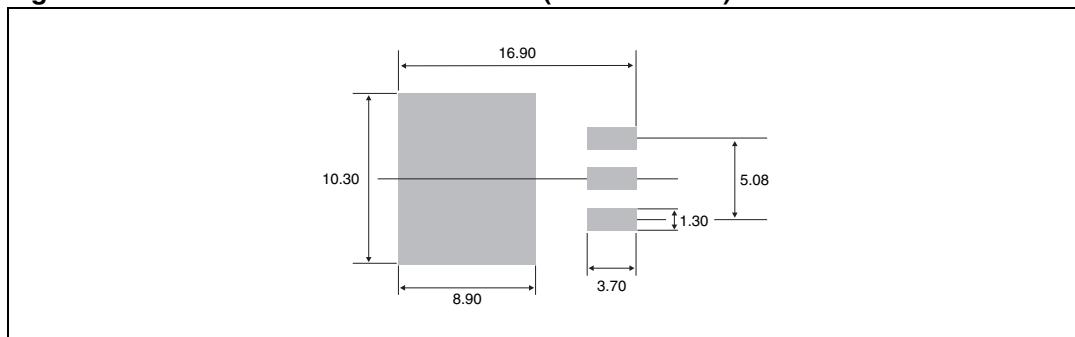

**Table 8. RD91 Package dimensions**

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A		40.00		1.575
A1	29.90	30.30	1.177	1.193
A2		22.00		0.867
B		27.00		1.063
B1	13.50	16.50	0.531	0.650
B2		24.00		0.945
C		14.00		0.551
C1		3.50		0.138
C2	1.95	3.00	0.077	0.118
E3	0.70	0.90	0.027	0.035
F	4.00	4.50	0.157	0.177
I	11.20	13.60	0.441	0.535
L1	3.10	3.50	0.122	0.138
L2	1.70	1.90	0.067	0.075
N1	33°	43°	33°	43°
N2	28°	38°	28°	38°

**Table 9. TOP3 Insulated package dimensions**

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.4		4.6	0.173		0.181
B	1.45		1.55	0.057		0.061
C	14.35		15.60	0.565		0.614
D	0.5		0.7	0.020		0.028
E	2.7		2.9	0.106		0.114
F	15.8		16.5	0.622		0.650
G	20.4		21.1	0.815		0.831
H	15.1		15.5	0.594		0.610
J	5.4		5.65	0.213		0.222
K	3.4		3.65	0.134		0.144
ØL	4.08		4.17	0.161		0.164
P	1.20		1.40	0.047		0.055
R		4.60			0.181	

**Table 10. TO-220AB (Insulated and non-insulated) Package dimensions**

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.20		15.90	0.598		0.625
a1		3.75			0.147	
a2	13.00		14.00	0.511		0.551
B	10.00		10.40	0.393		0.409
b1	0.61		0.88	0.024		0.034
b2	1.23		1.32	0.048		0.051
C	4.40		4.60	0.173		0.181
c1	0.49		0.70	0.019		0.027
c2	2.40		2.72	0.094		0.107
e	2.40		2.70	0.094		0.106
F	6.20		6.60	0.244		0.259
Øl	3.75		3.85	0.147		0.151
I4	15.80	16.40	16.80	0.622	0.646	0.661
L	2.65		2.95	0.104		0.116
I2	1.14		1.70	0.044		0.066
I3	1.14		1.70	0.044		0.066
M		2.60			0.102	

## 4 Ordering information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
BTA/BTB24-xxxxyzRG	BTA/BTB24xxxxyz	TO-220AB	2.3 g	50	Tube
BTA25-xxxxyzRG	BTA25-xxxxyz	RD91	20 g	25	Bulk
BTA26-xxxxyzRG	BTA26-xxxxyz	TOP3 Ins.	4.5 g	30	Tube
T2535-xxxG	T2535xxxG	D <sup>2</sup> PAK	1.5 g	50	Tube
T2535-xxxG-TR	T2535xxxG			1000	Tape and reel

**Note:** xxx = voltage, yy = sensitivity, z = type

## 5 Revision History

Date	Revision	Description of Changes
Oct-2002	6A	Previous update.
13-Feb-2006	7	TO-220AB delivery mode changed from bulk to tube. ECOPACK statement added.
31-May-2006	8	Reformatted to current standard. $T_c$ in figure 3 changed to $T_{amb}$
31-Jul-2006	9	Typing error corrected on page 1 (BTB124 instead of BTB24)