

isc Silicon NPN Power Transistor

BUX48A

DESCRIPTION

- High Voltage Capability
- High Current Capability
- Fast Switching Speed

APPLICATIONS

Designed for high-voltage,high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch mode applications such as:



- Switching regulators
- Inverters
- Solenoid and relay drivers
- Motor controls
- Deflection circuits

Absolute maximum ratings(Ta=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	1000	V
V _{CEO}	Collector-Emitter Voltage	450	V
V _{EBO}	Emitter-Base Voltage	7	V
I _c	Collector Current-Continuous	15	A
I _{cm}	Collector Current-Peak	30	A
I _B	Base Current-Continuous	5	A
I _{BM}	Base Current-peak	20	A
P _c	Collector Power Dissipation @T _c =25°C	50	W
T _j	Junction Temperature	200	°C
T _{stg}	Storage Temperature Range	-65~200	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal Resistance,Junction to Case	3.5	°C/W

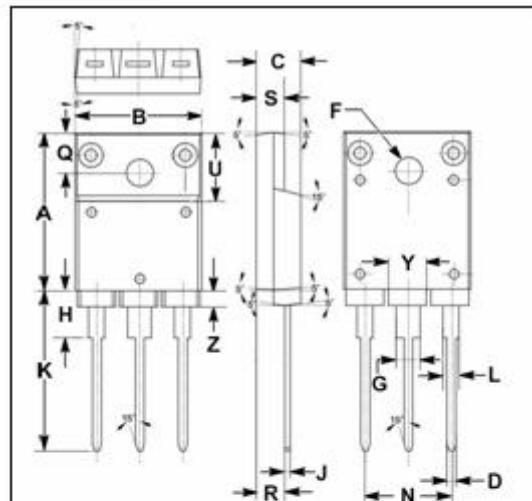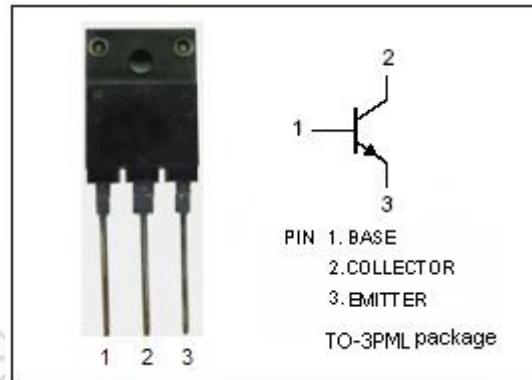

DIM	mm	
	MIN	MAX
A	19.90	20.10
B	15.75	16.10
C	5.50	5.70
D	0.90	1.10
F	3.30	3.50
G	2.90	3.20
H	5.90	6.10
J	0.595	0.70
K	21.10	22.50
L	1.90	2.25
N	10.80	11.00
O	4.90	5.10
R	3.75	3.95
S	3.20	3.60
U	9.90	10.10
Y	4.20	4.90
Z	1.90	2.10

isc Silicon NPN Power Transistor
BUX48A
ELECTRICAL CHARACTERISTICS

T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V _{CEO(SUS)}	Collector-Emitter Sustaining Voltage	I _C = 50mA ; I _B = 0	450		V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E = 50mA; I _C = 0	7		V
V _{CE(sat)-1}	Collector-Emitter Saturation Voltage	I _C = 8A; I _B = 1.6A I _C = 8A; I _B = 1.6A; T _c = 100°C		1.5 2.0	V
V _{CE(sat)-2}	Collector-Emitter Saturation Voltage	I _C = 12A ; I _B = 2.4A		5.0	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = 8A; I _B = 1.6A I _C = 8A; I _B = 1.6A; T _c = 100°C		1.6 1.6	V
I _{CBO}	Collector Cutoff Current	V _{CB} =1000V; I _E = 0 V _{CB} =100V; I _E = 0; T _c =125°C		0.2 2	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} = 5V; I _C = 0		0.1	mA
h _{FE}	DC Current Gain	I _C = 8A ; V _{CE} = 5V	8		

Switching Times

t _{on}	Turn-On Time	I _C = 8A; I _{B1} =I _{B2} = -1.6A; V _{CC} = 150V	1.0	μ s
t _{stg}	Storage Time		3.0	μ s
t _f	Fall Time		0.8	μ s