

Isc N-Channel MOSFET Transistor

IPA65R190C7

• FEATURES

- With TO-220F package
- Low input capacitance and gate charge
- Reduced switching and conduction losses
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS



- Switching applications

• ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DS}	Drain-Source Voltage	650	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous @ $T_c=25^{\circ}\text{C}$ (V_{GS} at 10V) $T_c=100^{\circ}\text{C}$	8 5	A
I_{DM}	Drain Current-Single Pulsed	49	A
P_D	Total Dissipation @ $T_c=25^{\circ}\text{C}$	30	W
T_j	Max. Operating Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	-55~150	$^{\circ}\text{C}$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	4.21	$^{\circ}\text{C/W}$
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	80	$^{\circ}\text{C/W}$

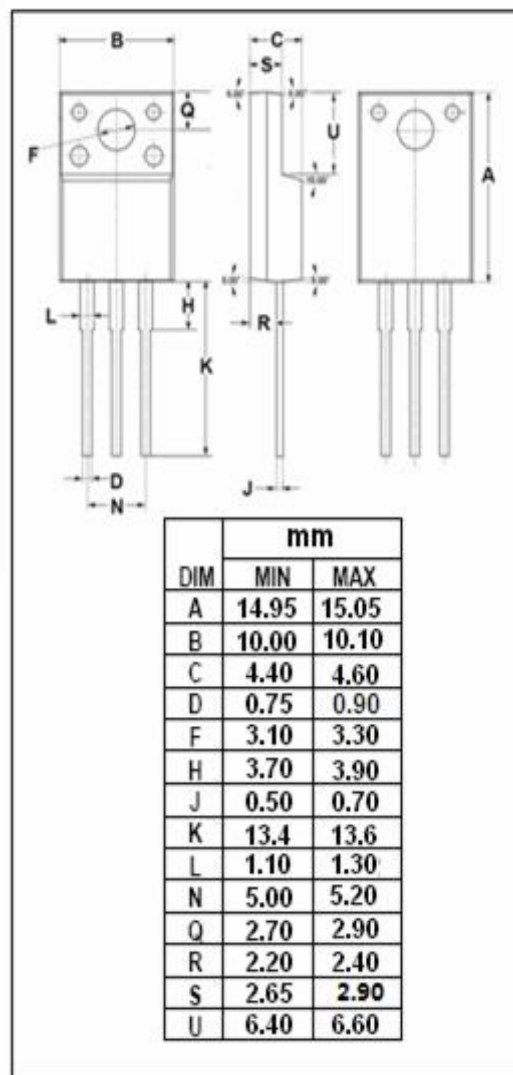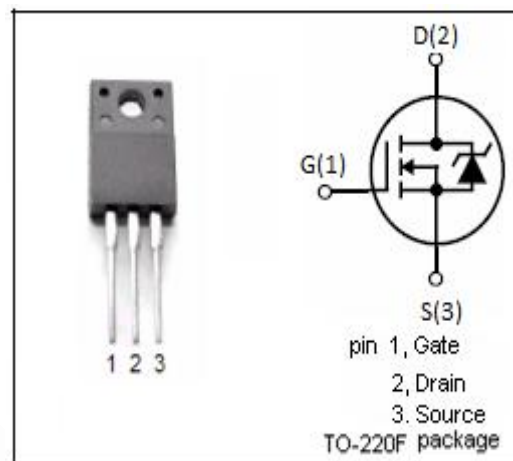

isc N-Channel MOSFET Transistor

IPA65R190C7

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V; I_D=1mA$	650			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=0.29mA$	3.0		4.0	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10V; I_D=5.7A$		168	190	$m\Omega$
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V; V_{DS}=0V$			± 0.1	μA
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=650V; V_{GS}=0V; T_J=25^{\circ}\text{C}$ $V_{DS}=650V; V_{GS}=0V; T_J=150^{\circ}\text{C}$			1 100	μA
V_{SDF}	Diode forward voltage	$I_{SD}=5.7A, V_{GS}=0V$		0.9		V