


isc Three Terminal Negative Voltage Regulator

L7905CV

FEATURES

- Output current in excess of 1.5 A
- Output voltage of 5V
- Internal thermal overload protection
- Output transition Safe-Area compensation
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

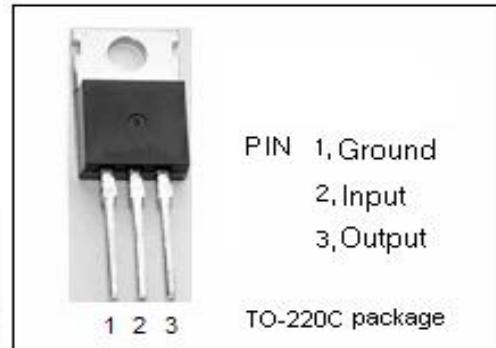


ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	RATING	UNIT
V_i	DC input voltage	-35	V
I_o	Output current	internally limited	
P_{tot}	Power dissipation	internally limited	
T_{OP}	Operating junction temperature	0~125	°C
T_{stg}	Storage temperature	-55~150	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	3	°C/W
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	50	°C/W

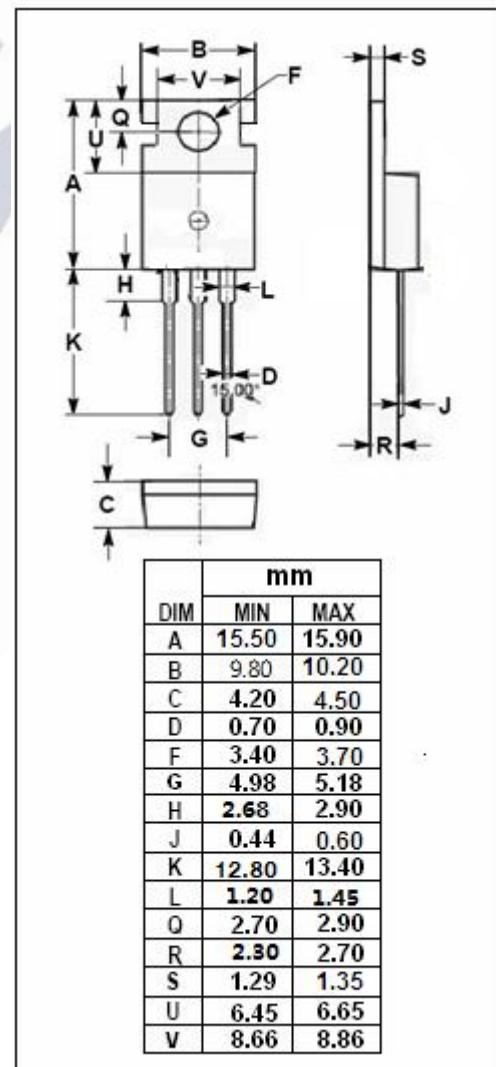

isc Three Terminal Negative Voltage Regulator**L7905CV****• ELECTRICAL CHARACTERISTICS** $T_j=25^\circ\text{C}$ ($V_i = -10\text{V}$, $I_o = 0.5\text{A}$, $C_i = 0.33 \mu\text{F}$, $C_o = 0.1 \mu\text{F}$ unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V_o	Output Voltage	$V_{in}=10\text{V}$; $I_o=500\text{mA}$	-4.8	-5.2	V
V_o	Output Voltage	$I_o=-5\text{mA}$ to -1A ; $V_{in}=-8\text{V}$ to -20V	-4.75	-5.25	V
ΔV_v	Line Regulation	$7\text{V} \leq V_{in} \leq 25\text{V}$; $I_o=0.5\text{A}$		100	mV
ΔV_i	Load Regulation	$5.0\text{mA} \leq I_o \leq 1.5\text{A}$; $V_{in}=10\text{V}$		100	mV
I_q	Quiescent Current	$V_{in}=10\text{V}$; $I_o=1.0\text{A}$		6.0	mA
Δq_1	Quiescent Current Change	$5.0\text{mA} \leq I_o \leq 1.0\text{A}$; $V_{in}=10\text{V}$		0.5	mA
Δq_2	Quiescent Current Change	$8\text{V} \leq V_{in} \leq 25\text{V}$; $I_o=500\text{mA}$		1.3	mA