

LM9044 Lambda Sensor Interface Amplifier

General Description

The LM9044 is a precision differential amplifier specifically designed for operation in the automotive environment. Gain accuracy is guaranteed over the entire automotive temperature range (-40°C to $+125^{\circ}\text{C}$) and is factory trimmed prior to package assembly. The input circuitry has been specifically designed to reject common-mode signals as much as 3V below ground on a single positive power supply. This facilitates the use of sensors which are grounded at the engine block while the LM9044 itself is grounded at chassis potential. An external capacitor sets the maximum operating frequency of the amplifier, thereby filtering high frequency transients. Both inputs are protected against accidental shorting to the battery and against load dump transients. The input impedance is typically $1\text{ M}\Omega$.


The output op amp is capable of driving capacitive loads and is fully protected. Also, internal circuitry has been pro-

vided to detect open circuit conditions on either or both inputs and force the output to a "home" position (a ratio of the external reference voltage).


Features

- Normal circuit operation guaranteed with inputs up to 3V below ground on a single supply
- Gain factory trimmed and guaranteed over temperature ($\pm 3\%$ of full-scale from -40°C to $+125^{\circ}\text{C}$)
- Low power consumption (typically 1 mA)
- Fully protected inputs
- Input open circuit detection
- Operation guaranteed over the entire automotive temperature range (-40°C to $+125^{\circ}\text{C}$)
- Single supply operation

Schematic and Connection Diagrams

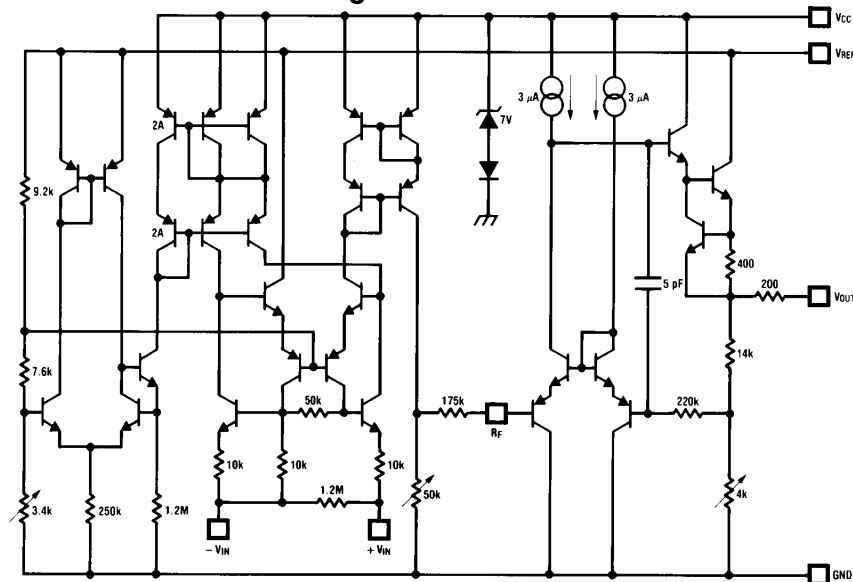

Plastic Chip Carrier Package



Order Number LM9044V
See NS Package Number V20A

*Pins 1, 3, 4, 6, 8, 9, 10, 11, 13, 14, 16, 18, 19 are trim pins and should be left floating.

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--|-------------------------------|
| V_{CC} Supply Voltage ($R_{V_{CC}} = 15\text{ k}\Omega$) | $\pm 60\text{V}$ |
| V_{REF} Supply Voltage | $-0.3\text{V to } +6\text{V}$ |
| DC Input Voltage (Either Input) | $-3\text{V to } +16\text{V}$ |
| Input Transients (Note 1) | $\pm 60\text{V}$ |
| Power Dissipation (see Note 6) | 1350 mW |
| Output Short Circuit Duration | Indefinite |

| | |
|-----------------------------|--|
| Operating Temperature Range | $-40^{\circ}\text{C to } +125^{\circ}\text{C}$ |
| Storage Temperature Range | $-65^{\circ}\text{C to } +150^{\circ}\text{C}$ |

Soldering Information

| | |
|------------------------------|-----------------------|
| Plastic Chip Carrier Package | |
| Vapor Phase (60 seconds) | 215°C |
| Infrared (15 seconds) | 220°C |

See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.

Electrical Characteristics $V_{CC} = 12\text{V}$, $V_{REF} = 5\text{V}$, $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ unless otherwise noted

| Parameter | Conditions | (Note 2) | | | (Note 3) | | | Units |
|--|---|----------|------------|------------|----------|------------|-----------|------------------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Differential Voltage Gain | $V_{DIF} = 0.5\text{V}$ $-1\text{V} \leq V_{CM} \leq +1\text{V}$ | 4.41 | 4.50 | 4.59 | | | | V/V |
| | $V_{DIF} = 0.5\text{V}$, $-3\text{V} \leq V_{CM} \leq +1\text{V}$ | | | | 4.36 | 4.50 | 4.64 | V/V |
| Gain Error (Note 5) | $0 \leq V_{DIF} \leq 1\text{V}$ $-1\text{V} \leq V_{CM} \leq +1\text{V}$ | -2 | 0 | 2 | | | | %/FS |
| | $0 \leq V_{DIF} \leq 1\text{V}$ $-3\text{V} \leq V_{CM} \leq +1\text{V}$ | | | | -3 | 0 | 3 | %/FS |
| Differential Input Resistance | $0 \leq V_{DIF} \leq 1\text{V}$ $-1\text{V} \leq V_{CM} \leq +1\text{V}$ | 0.95 | 1.20 | 3.00 | | | | $\text{M}\Omega$ |
| | $0 \leq V_{DIF} \leq 1\text{V}$ $-3\text{V} \leq V_{CM} \leq +1\text{V}$ | | | | 0.70 | 1.20 | 4.00 | $\text{M}\Omega$ |
| Non-Inverting Input Bias Current | $0 \leq V_{DIF} \leq 1\text{V}$ $-1\text{V} \leq V_{CM} \leq +1\text{V}$ | | ± 0.38 | ± 0.65 | | | | μA |
| | $0 \leq V_{DIF} \leq 1\text{V}$ $-3\text{V} \leq V_{CM} \leq +1\text{V}$ | | | | | ± 0.38 | ± 1.5 | μA |
| Inverting Input Bias Current | $0 \leq V_{DIF} \leq 1\text{V}$ $-1\text{V} \leq V_{CM} \leq +1\text{V}$ | -25 | -65 | -100 | | | | μA |
| | $0\text{V} \leq V_{DIF} \leq 1\text{V}$ $-3\text{V} \leq V_{CM} \leq +1\text{V}$ | | | | | -45 | -150 | μA |
| V_{CC} Supply Current | $V_{CC} = 12\text{V}$, $R_{V_{CC}} = 15\text{k}$ | | 300 | 500 | | | | μA |
| V_{REF} Supply Current | $4.75\text{V} \leq V_{REF} \leq 5.5\text{V}$ | | 0.5 | 1.0 | | | | mA |
| Common-Mode Voltage Range (Note 4) | | -1 | | 1 | -3 | | 1 | V |
| DC Common-Mode Rejection Ratio | Input Referred $-1\text{V} \leq V_{CM} \leq +1\text{V}$ $V_{DIF} = 0.5\text{V}$ | 50 | 60 | | | | | dB |
| Open Circuit Output Voltage | One or Both Inputs Open, $-1\text{V} \leq V_{CM} \leq +1\text{V}$ | 0.371 | 0.397 | 0.423 | | | | XV_{REF} |
| | $-3\text{V} \leq V_{CM} \leq +1\text{V}$ | | | | 0.365 | 0.397 | 0.429 | XV_{REF} |
| Short Circuit Output Current | Output Grounded | 1.0 | 2.7 | 5.0 | | | | mA |
| V_{CC} Power Supply Rejection Ratio | $V_{CC} = 12\text{V}$, $R_{V_{CC}} = 15\text{K}$ $V_{DIF} = 0.5\text{V}$ | 50 | 65 | | | | | dB |
| V_{REF} Power Supply Rejection Ratio | $V_{REF} = 5\text{V}$, V_{DC} $V_{DIF} = 0.5\text{V}$ | 60 | 74 | | | | | dB |

Note 1: This test is performed with a 1000 Ω source impedance.

Note 2: These parameters are guaranteed and 100% production tested.







Note 3: These parameters will be guaranteed but not 100% production tested.

Note 4: The LM9044 has been designed to common-mode to -3V , but production testing is only performed at $\pm 1\text{V}$.

Note 5: Gain error is given as a percent of full-scale. Full-scale is defined as 1V at the input and 4.5V at the output.





Note 6: For operation in ambient temperatures above 25°C the device must be derated based on a maximum junction temperature of 150°C and a thermal resistance of 93°C/W junction to ambient.

Typical Performance Characteristics

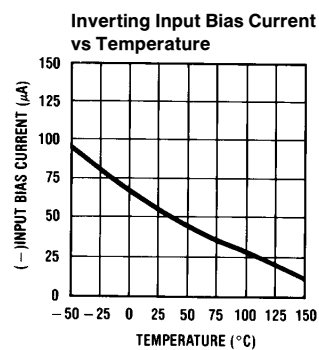


TL/H/6744-3

Typical Performance Characteristics (Continued)



TL/H/6744-4


Test Circuit

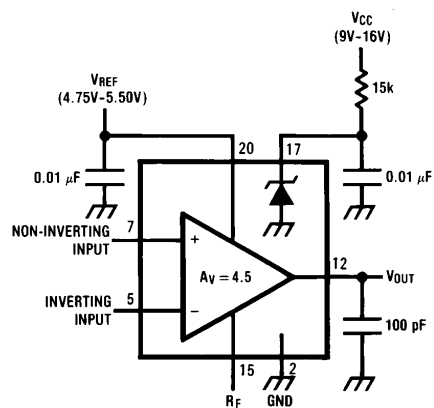

TL/H/6744-5



Physical Dimensions inches (millimeters)

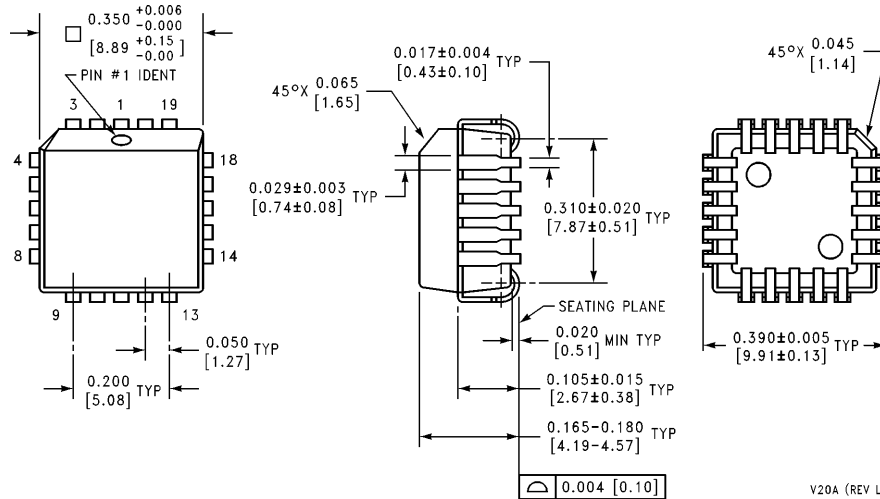

Plastic Chip Carrier Package
Order Number LM9044V
NS Package Number V20A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
19th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.