

Advanced SD decoder for set-top box applications

Data brief


Features

- Advanced standard-definition video decoding (H264/VC-1/MPEG2/AVS)
- Advanced multi-channel audio decoding (MPEG 1, MPEG 2, MP3, DD/DD+, AAC/AAC+, WMA9/WMA9Pro)
- Linux, Windows CE® and OS21 compatible ST40 applications CPU
- 16-bit DDR1/DDR2 compatible local memory interface
- Multi-stream, DVR capable transport stream processing
- Extensive connectivity (dual USB controller, Ethernet MAC/MII/RMII/TMII, PCI and SD-MMC/SDIO)

Description

The STi5206 advanced SD decoder for set-top box applications is a highly integrated solution, suitable for DVB-S satellite/x-DSL/IP STB markets worldwide.

The STi5206 uses ST's state-of-the-art process technology to provide a low-cost, fully featured, SD set-top box decoder.

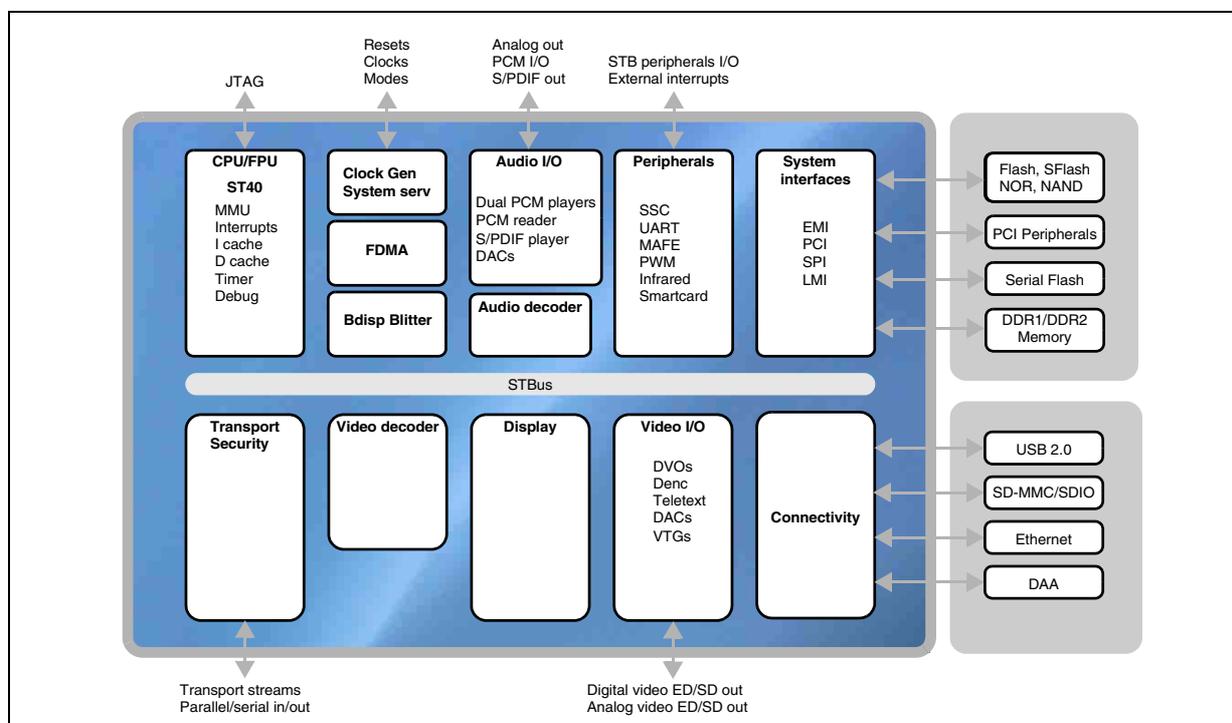

1 Introduction

The STi5206 is targeted at the latest operator and CE manufacturer requirements for STB markets across all networks (cable/satellite/DTT/x-DSL/IP) worldwide.

The STi5206 provides a solution for operators to specify a range of low-cost SD STBs including low-cost zappers, interactive STBs and DVR-capable STBs, with content delivery possible using satellite broadcast or broadband networks, or both (Hybrid STBs).

The STi5206 is optimized for secure Pay-TV applications with integrated DVB, DES, AES, Multi-2 and ICAM descramblers and smartcard interfaces.

The STi5206 offers enhancements in performance, features and integration to current users of ST's SD AVC family of audio/video decoders, while reducing cost and time-to-market for the next generation deployments.

Features	Benefits
Serial Flash based secure boot and code storage, integrated voltage regulator, 23 mm × 23 mm PBGA package	Enables further BOM optimization and cost reduction of advanced decoding SD STBs
ST40 applications CPU, 32K I cache, 32K D cache	Superscalar performance from a single CPU core, using standard tools and operating systems (Linux, OS21)
STMicroelectronics' video decoding system	Decoding of advanced standard definition MPEG2, H264 and VC-1/WMV9 streams, with the performance and flexibility for web-based content decoding such as Flash, DivX, MJPEG and Real
Dual USB 2.0 hosts, Ethernet MAC with MII/RMII and TMII, PCI, SD-MMC/SDIO	Extensive high speed connectivity for the widest range of STB peripherals, such as Flash drives, external HDDs, home network controllers (for example MoCA, Wi-Fi), memory cards
Low-power process, design and architecture	Best-in-class, low-power standby mode, to meet emerging energy standards for STBs. Dynamic configuration of power to individual sub-systems enables power-efficient active standby modes
Advanced 2D graphics and display subsystem and 480p/576p display output	Allows visually appealing user interfaces and video rich navigation to be offered to consumers, while high quality progressive output can be watched on the latest displays

2 Revision history

Table 1. Document revision history

Date	Revision	Changes
29-Sep-2009	1	Initial release.
23-Jul-2010	2	Simplified content.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com