


## VIDEO & SOUND IF SYSTEM

- VERY LOW CURRENT ABSORPTION
- 3 STAGE IF GAIN CONTROLLED AMPLIFIER
- SYNCHRONOUS VIDEO DEMODULATOR
- WHITE SPOT AND NOISE INVERTER
- AGC CIRCUIT WITH NOISE GATING
- TUNER AGC OUTPUT FOR PNP TUNERS
- FM DETECTOR
- AF AMPLIFIER WITH DC VOLUME CONTROL
- AFC
- 2 V<sub>PP</sub> ON VIDEO OUTPUT

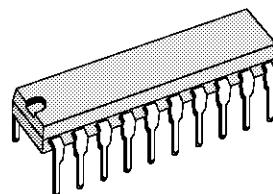

**DIP20**  
(Plastic Package)

**ORDER CODE : TDA8213**

### DESCRIPTION


The TDA8213 is a monolithic integrated circuit in DIP20 package for colour and black & white television receivers using PNP tuners. It is intended to operate with a negatively modulated vision carrier and frequency modulated sound carrier. Used with TDA8214/15 (H/V deflection circuit) and TDA8217 (Pal decoder and video processor), this IC permits a complete low-cost solution for PAL applications.

### PIN CONNECTIONS

TUNER DELAY RESISTOR	<input type="checkbox"/>	1	AGC MEMORY CAPACITOR	<input type="checkbox"/>
TUNER OUTPUT CURRENT	<input type="checkbox"/>	2	IF LC	<input type="checkbox"/>
V <sub>CC</sub>	<input type="checkbox"/>	3	IF LC	<input type="checkbox"/>
NOT TO BE CONNECTED	<input type="checkbox"/>	4	VIDEO PEAKING	<input type="checkbox"/>
IF INPUT	<input type="checkbox"/>	5	AFC TANK LC	<input type="checkbox"/>
IF INPUT	<input type="checkbox"/>	6	AFC OUTPUT	<input type="checkbox"/>
GROUND	<input type="checkbox"/>	7	CVBS OUTPUT	<input type="checkbox"/>
AUDIO OUTPUT	<input type="checkbox"/>	8	NOT TO BE CONNECTED	<input type="checkbox"/>
SOUND VOLUME CONTROL	<input type="checkbox"/>	9	2nd IF SOUND CHANNEL INPUT	<input type="checkbox"/>
FM TANK LC	<input type="checkbox"/>	10	2nd IF SOUND CHANNEL INPUT	<input type="checkbox"/>
		11		

# TDA8213

## BLOCK DIAGRAM

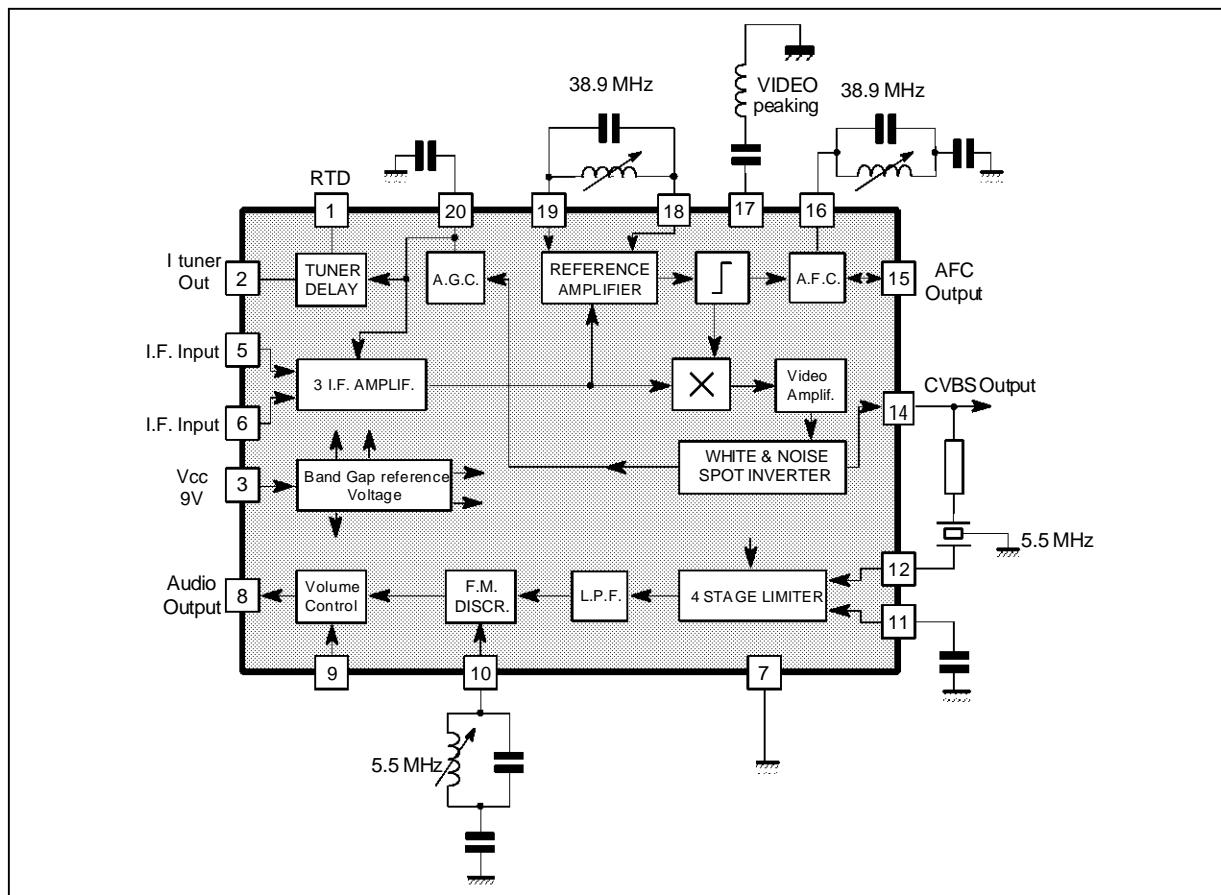

8213-02.EPS

## ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V <sub>S</sub>	Supply voltage	13.5	V
V <sub>X</sub>	Tuner AGC voltage	V <sub>S</sub>	V
P	Power dissipation at T <sub>AMB</sub> = 70°C	880	mW
T <sub>STG</sub>	Storage temperature range	- 40, + 150	°C

8213-01.TBL

## THERMAL DATA

Symbol	Parameter	Value	Unit
R <sub>TH(j-a)</sub>	Junction-ambient thermal resistance	80	°C/W

8213-02.TBL

## ELECTRICAL CHARACTERISTICS

(T<sub>amb</sub> = 25°C, V<sub>C</sub> = 9V, IF input = 10mV<sub>RMS</sub> top sync, D = 90%, Video BW = 5MHz, Sound carrier input : 5.5MHz, 10mV<sub>RMS</sub>, f<sub>m</sub> = 1kHz, Audio BW = 20kHz, Δf = ± 25kHz, Volume attenuation = 0dB, unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
--------	-----------	-----------------	------	------	------	------

### SUPPLY

	Supply voltage		8	9	12.8	V
	Supply current		14	20	28	mA

8213-03.TBL

**ELECTRICAL CHARACTERISTICS**

( $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{cc} = 9\text{V}$ , IF input =  $10\text{mV}_{\text{RMS}}$  top sync,  $D = 90\%$ , Video BW =  $5\text{MHz}$ , Sound carrier input :  $5.5\text{MHz}$ ,  $10\text{mV}_{\text{RMS}}$ ,  $f_m = 1\text{kHz}$ , Audio BW =  $20\text{kHz}$ ,  $\Delta f = \pm 25\text{kHz}$ , Volume attenuation =  $0\text{dB}$ , unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
--------	-----------	-----------------	------	------	------	------

## IF AMPLIFIER

	AGC range		58	64	67	dB
	IF - sensitivity (RMS)	Video out -3dB		70		$\mu\text{V}$
	R input differential	Guaranteed by process	1	1.5	2	$\text{k}\Omega$
	C input Stray				2	$\text{pF}$

## DEMODULATED VIDEO OUTPUT

	S/N video (BW = $5\text{MHz}$ )	IF inp. = $10\text{mV}_{\text{RMS}}$ , $20 \log_{10} \frac{(WH - BL)}{N_{\text{RMS}}}$	49	55		dB
	Intermodulation 1.07MHz	AGC open loop, Picture carrier = $0\text{dB}$ , Chrominance carrier = $-3.2\text{dB}$ , Sound carrier = $-20\text{dB}$		50		dB
	Detected video output peak to peak (positive)		1.8	2	2.4	V
	Top synchro output level			1.9		V
	Video Bandwidth with output filter	-3dB, see Figures 1 and 2		7		MHz
	Differential phase			3	7	Degree
	Differential gain			3	7	%
	White noise clamp	Referred to the video output see Figure 6		4.5		V
	White noise insertion			3.2		V
	Video output current capability		1.2	2	2.6	mA
	Residual output carrier (RMS)	At $38.9\text{MHz}$ At $77.8\text{MHz}$			10 20	$\text{mV}$ $\text{mV}$

## AFC

	AFC slope	With $R_{\text{Load}} = 200\text{k}\Omega$ , see Figure 3	25	40	60	$\text{mV}/\text{kHz}$
--	-----------	---	----	----	----	------------------------

## AGC CIRCUIT

	Maximum I charge		550	900	1200	$\mu\text{A}$
	Maximum I discharge		14	20	26	$\mu\text{A}$
	$I_{\text{CH}} / I_{\text{DISCH}}$ Ratio			45		-

## TUNER AGC

	Sinked Current	Suitable for Mosfet-NCH	1.15	2	2.6	mA
	Slope	RTD = $0 \div 10\text{k}\Omega$			600	$\mu\text{A}/\text{dB}$


## DEMODULATED AUDIO OUTPUT

	Detected output audio signal (RMS)		120	270	350	$\text{mV}$
	Total harmonic distortion			0.5	2	%
	Amplitude modulation rejection	$m = 30\%$	40	53		dB
	2nd IF sound sensitivity -3dB FM detected audio signal (RMS)			200		$\mu\text{V}$
	$S + N$ N	$\Delta f = \pm 25\text{kHz}$ for signal $\Delta f = 0$ after deemphasis (BW = $20\text{kHz}$ )	50	60		dB
	Thermal drift of volume			0.05		$\frac{\text{dB}}{\text{°C}}$
	Input resistance limiter		400	560	720	$\Omega$
	Volume Control versus $V_9$	See Figure 4	$V_9 = 4.5\text{V}$ $V_9 = 2.5\text{V}$ $V_9 = 0.9\text{V}$	0 12 65	18 24 74	$\frac{\text{dB}}{\text{dB}}$ $\frac{\text{dB}}{\text{dB}}$ $\frac{\text{dB}}{\text{dB}}$

821304.TBL


## TDA8213

### TEST CIRCUIT

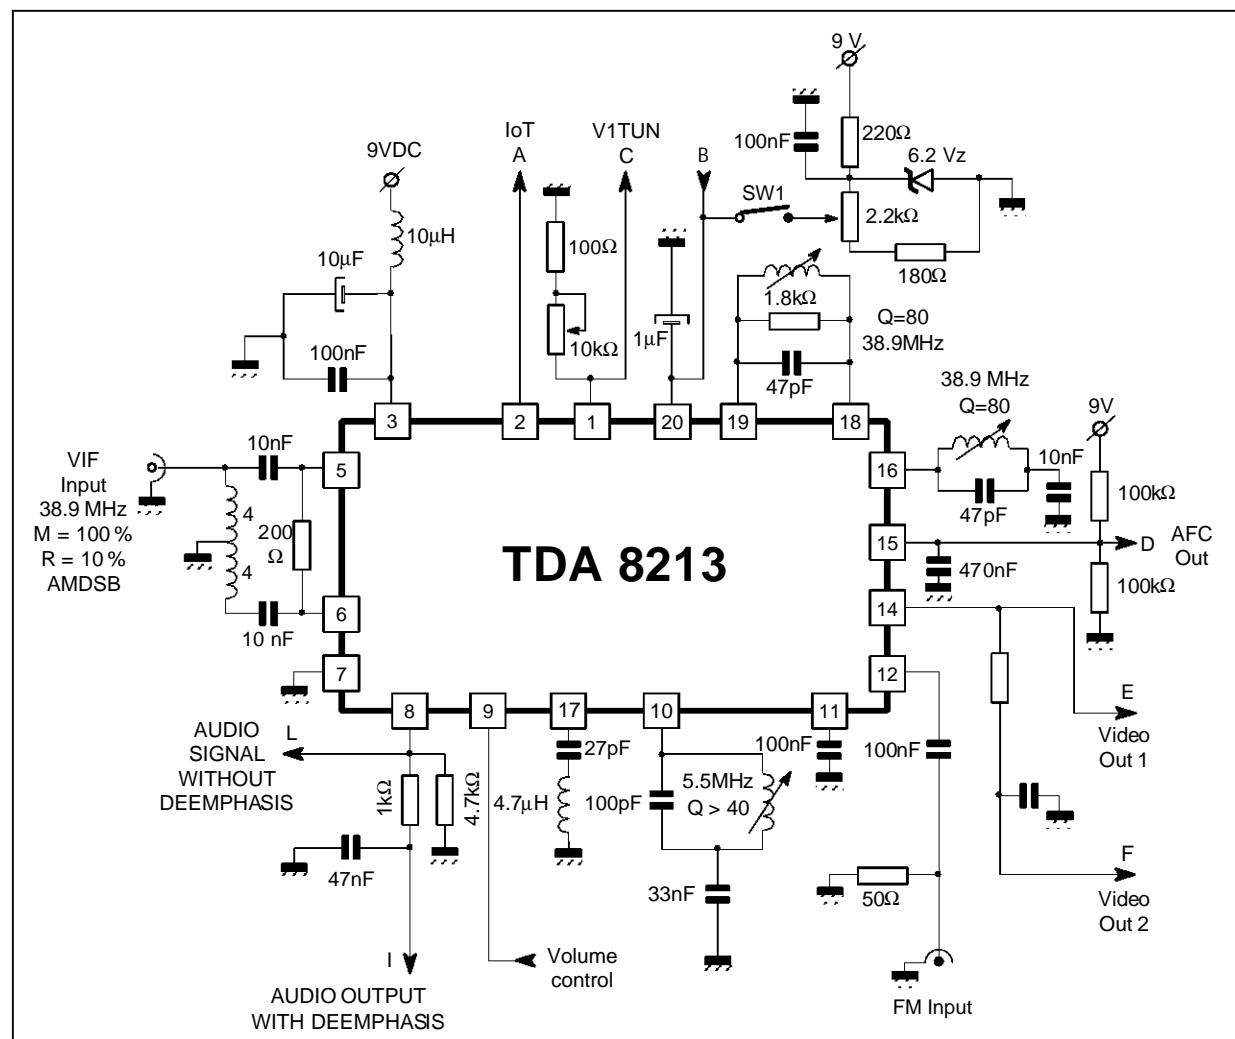

8213-03.EPS





**Figure 1 :** Output Signal Bandwidth without Video peaking

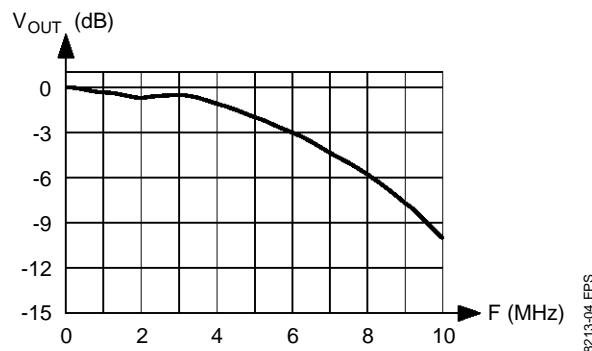

**Figure 2 :** Output Signal Bandwidth with Video peaking




8213-04.EPS

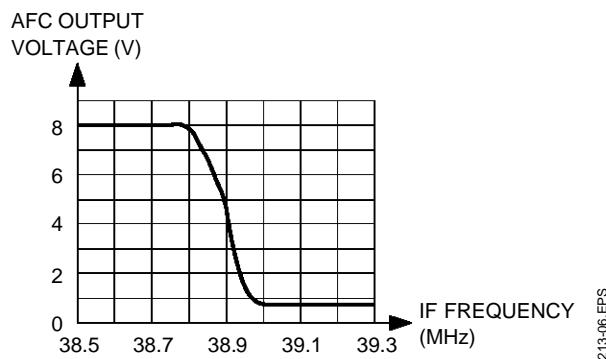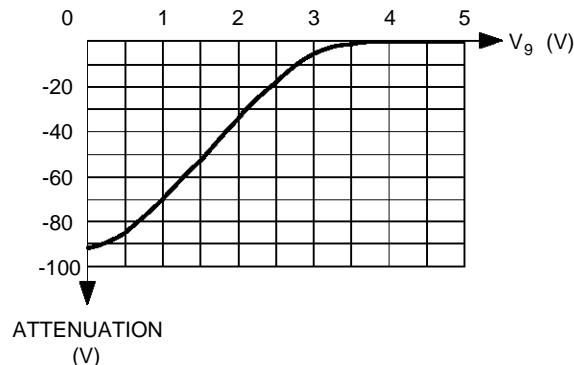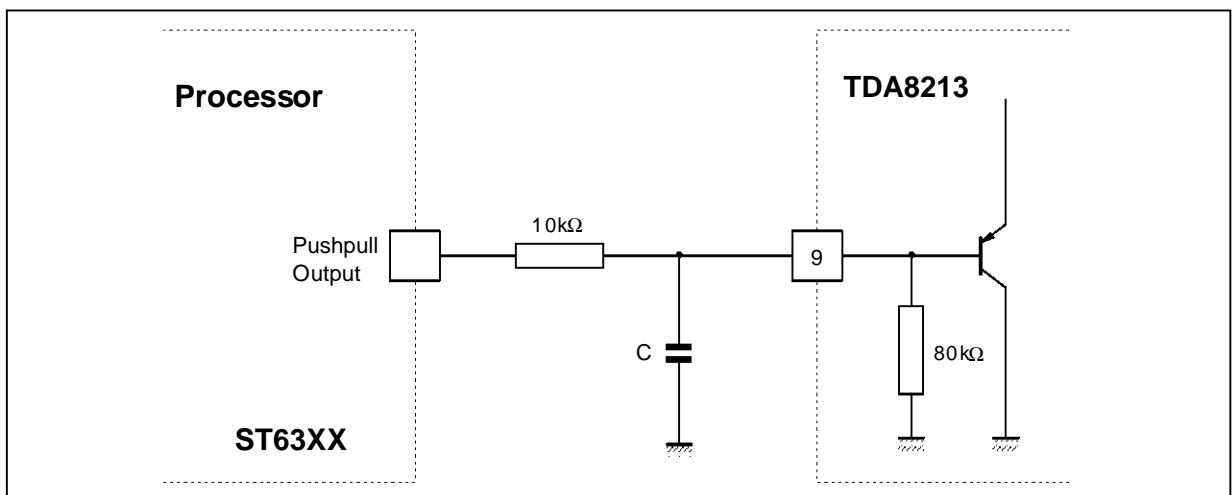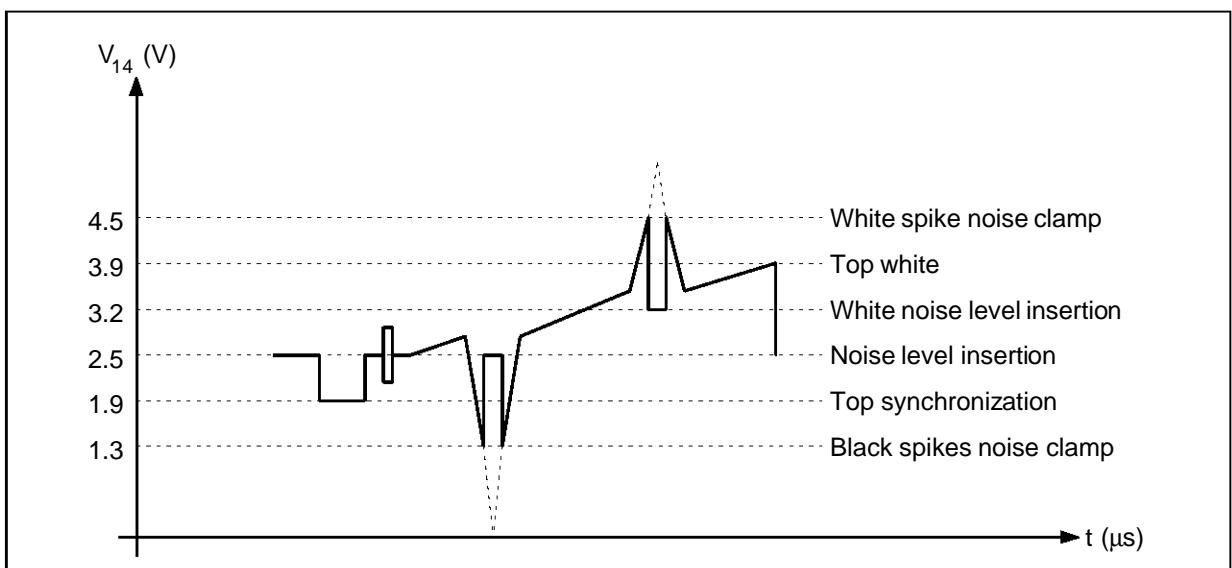**Figure 3 : AFC Voltage versus Input Frequency****Figure 4 : Volume Control Attenuation versus Voltage in Pin 9****Figure 5 : Typical Connection from μP to TDA8213 for Remote Volume Control (Pin 9)****Figure 6 : Black and White Noise Inverter**


TDA8213

**Figure 7 : Typical Application**

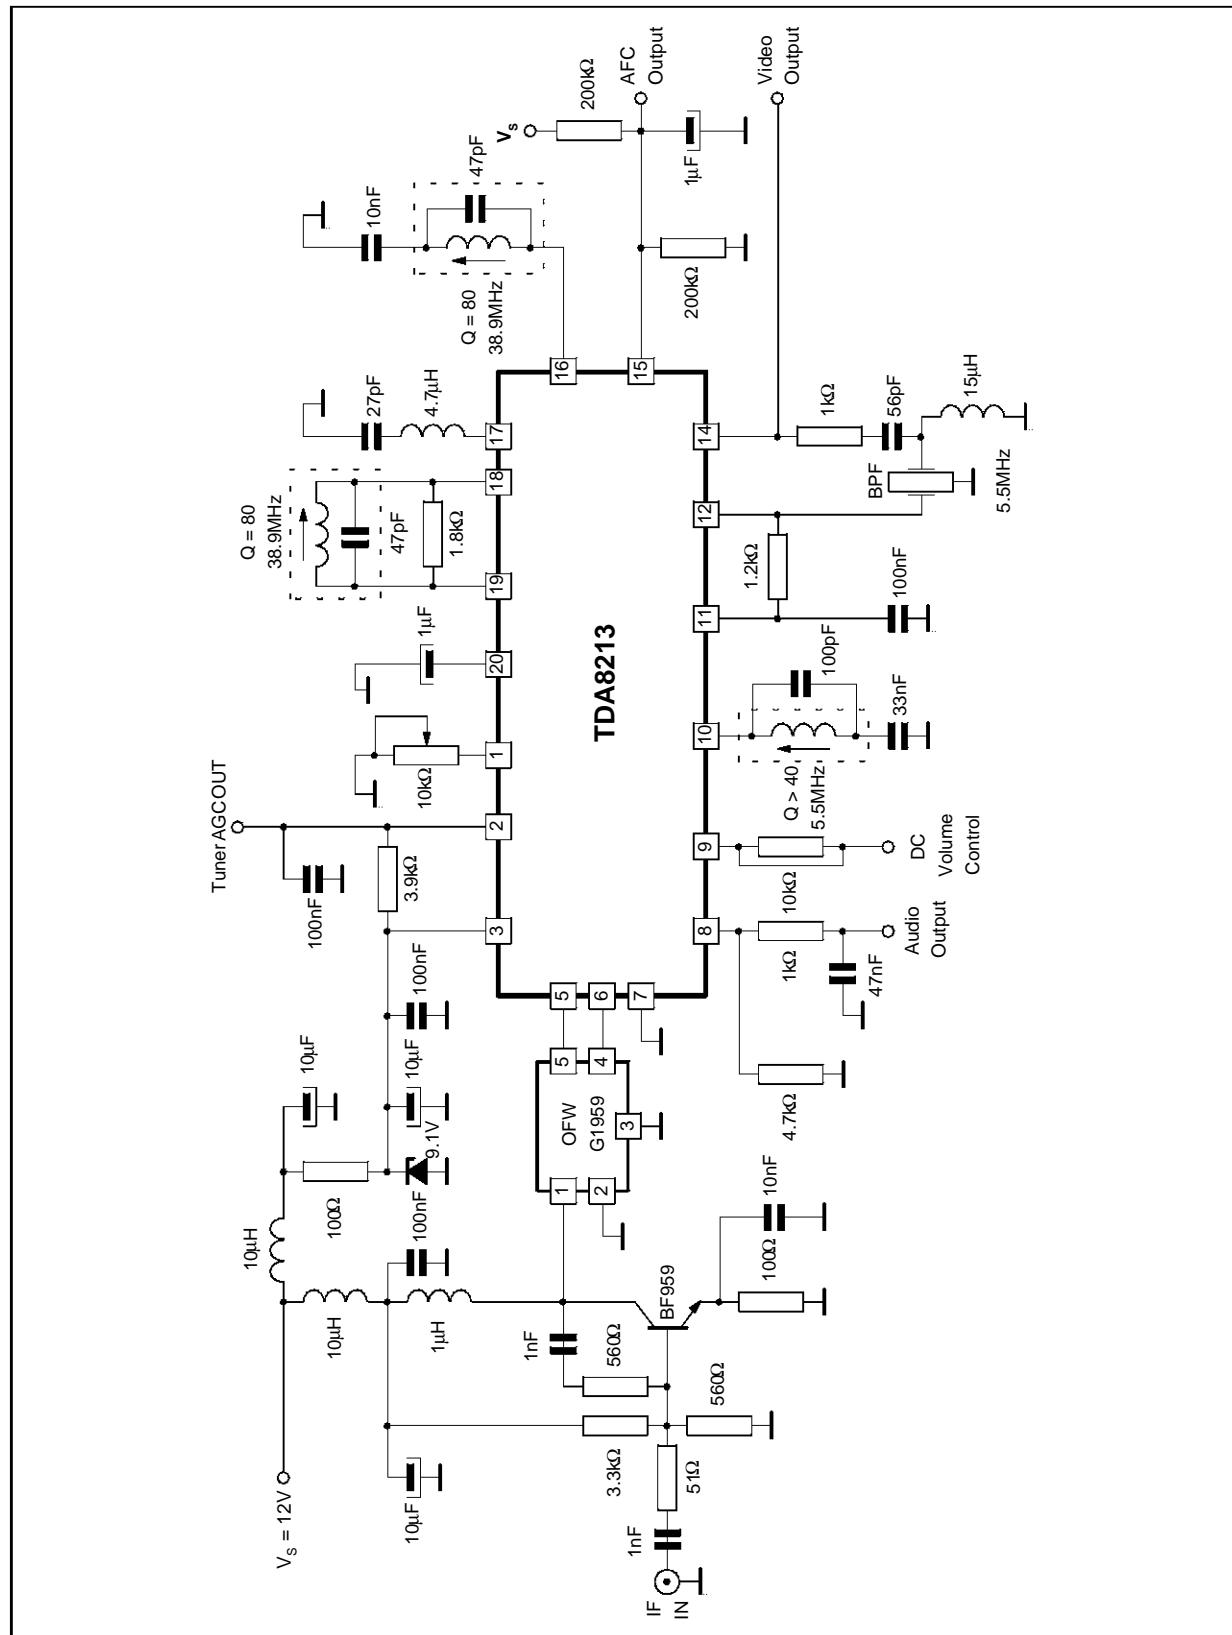

8213-10.EPS

Figure 8 : PC Board and Components Lay-out of the Circuit of Figure 7 (1 : 1 scale)

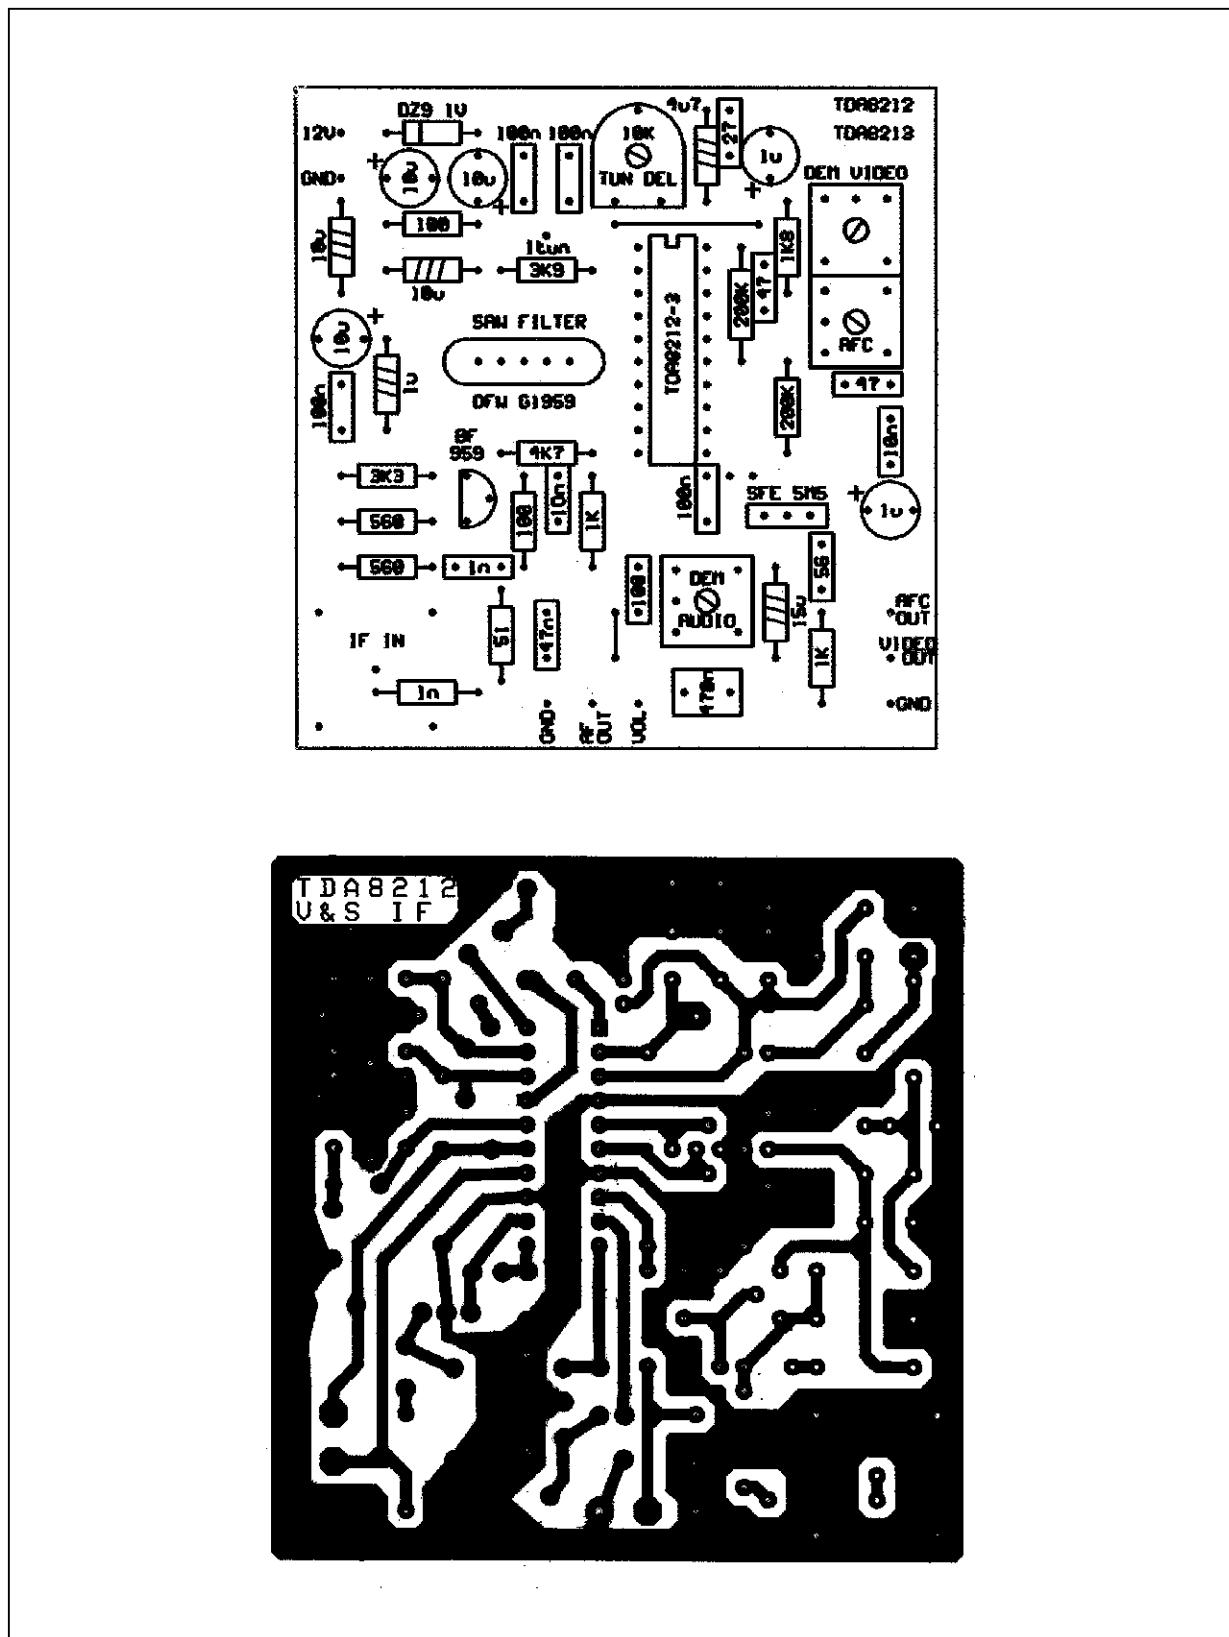


8213-11A.TIF/8213-11B.TIF

## TDA8213

### PACKAGE MECHANICAL DATA

20 PINS - PLASTIC DIP

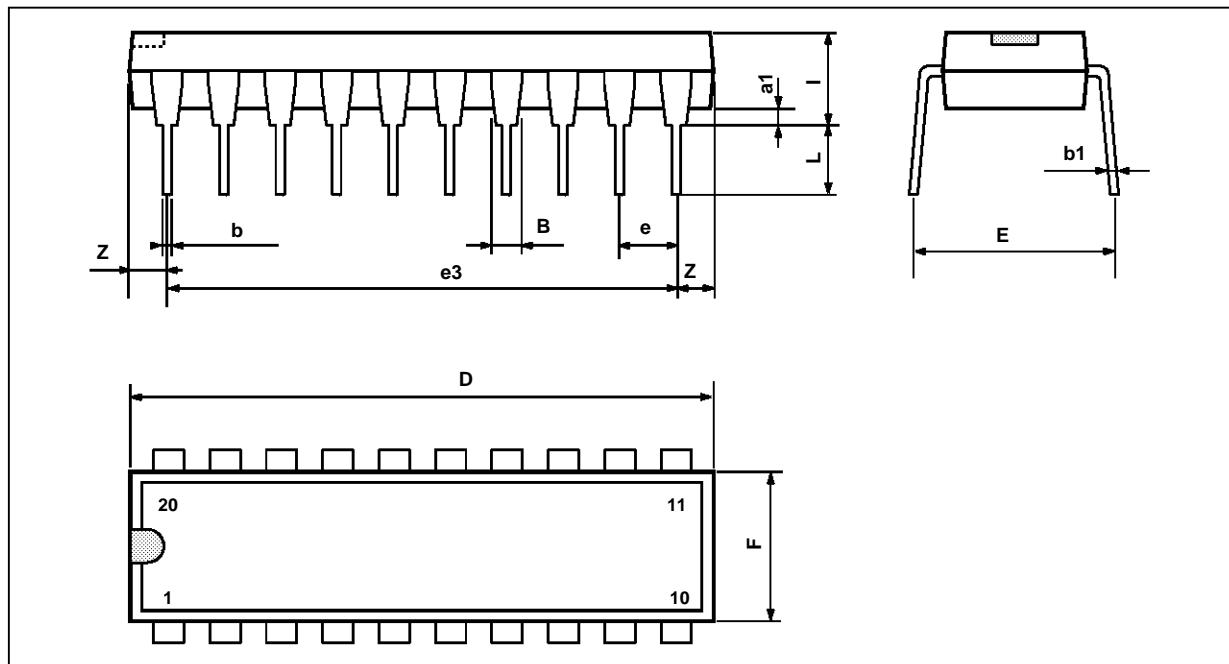

PM-DIP20.EPS

DIP20.TBL

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
a1	0.254			0.010		
B	1.39		1.65	0.055		0.065
b		0.45			0.018	
b1		0.25			0.010	
D			25.4			1.000
E		8.5			0.335	
e		2.54			0.100	
e3		22.86			0.900	
F			7.1			0.280
i			3.93			0.155
L		3.3			0.130	
Z			1.34			0.053

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No licence is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

Purchase of I<sup>2</sup>C Components of SGS-THOMSON Microelectronics, conveys a license under the Philips I<sup>2</sup>C Patent. Rights to use these components in a I<sup>2</sup>C system, is granted provided that the system conforms to the I<sup>2</sup>C Standard Specifications as defined by Philips.

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco  
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.