



KERSEMI


TMMDB3TG
DIAC

FEATURES

- V_{BO} : 32V
- Low breakover current: 15 μ A max
- Breakover voltage range: 30 to 34V

DESCRIPTION

Functioning as a trigger diode with a fixed voltage reference, the TMMDB3TG can be used in conjunction with triacs for simplified gate control circuits or as a starting element in fluorescent lamp ballasts.



MINIMELF

ABSOLUTE MAXIMUM RATINGS (limiting values)

Symbol	Parameter	Value	Unit
I_{TRM}	Repetitive peak on-state current $t_p = 20 \mu s$ $F = 120$ Hz	2	A
T_{stg} T_j	Storage temperature range Operating junction temperature range	- 40 to + 125	°C

TMMDB3TG


ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions		Value	Unit
V_{BO}	Breakover voltage *	$C = 22\text{nF}^{**}$	MIN.	30	V
			TYP.	32	
			MAX.	34	
$ V_{BO1} - V_{BO2} $	Breakover voltage symmetry	$C = 22\text{nF}^{**}$	MAX.	± 2	V
ΔV	Dynamic breakover voltage *	V_{BO} and V_F at 10mA	MIN.	9	V
V_O	Output voltage *	see diagram 2 ($R=20\Omega$)	MIN.	5	V
I_{BO}	Breakover current *	$C = 22\text{nF}^{**}$	MAX.	15	μA
t_r	Rise time *	see diagram 3	MAX.	2	μs
I_R	Leakage current *	$V_R = 0.5 V_{BO}$ max	MAX.	10	μA

* Applicable to both forward and reverse directions.

** Connected in parallel to the device.

ORDERING INFORMATION

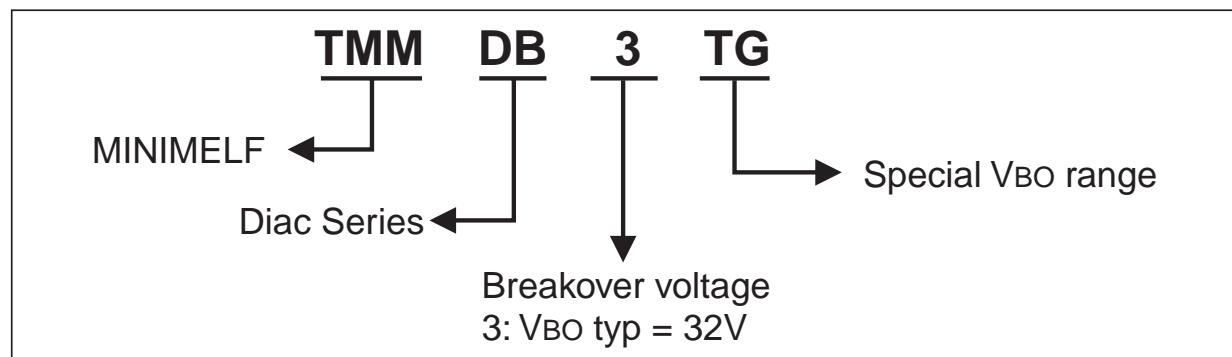

OTHER INFORMATION

Part Number	Marking	Weight	Base Quantity	Packing Mode
TMMDB3TG	(None)	0.04 g	2500	Tape & Reel






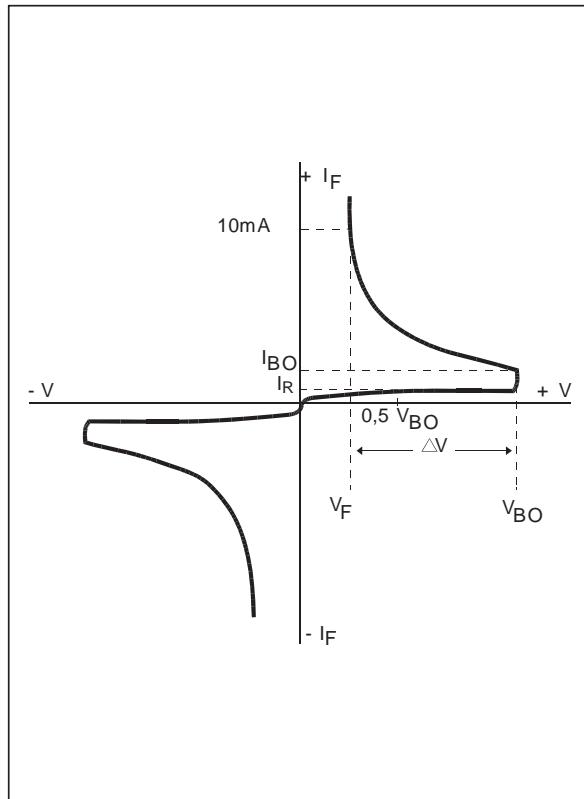
Diagram 1: Voltage - current characteristic curve.**Diagram 2:** Test circuit.**Diagram 3:** Rise time measurement.**Fig. 1:** Relative variation of VBO versus junction temperature (typical values)**Fig. 2:** Repetitive peak pulse current versus pulse duration (maximum values).

Fig. 3: Time duration while current pulse is higher 50mA versus C and Rs (typical values).

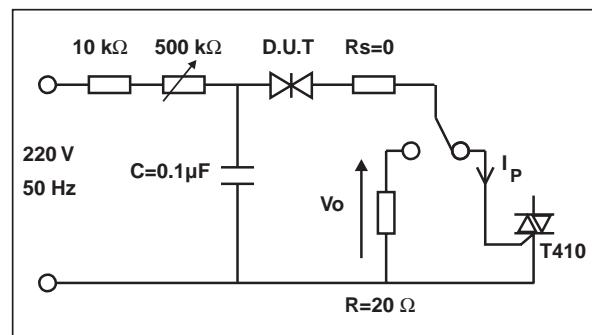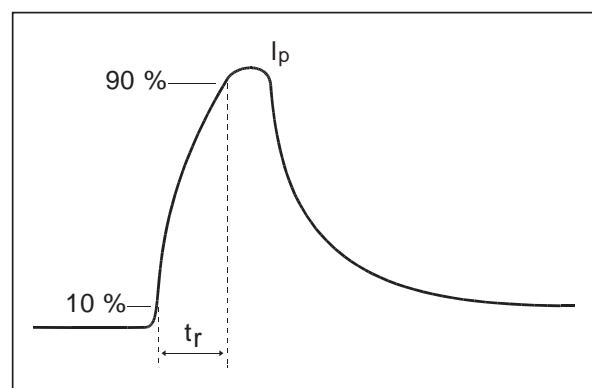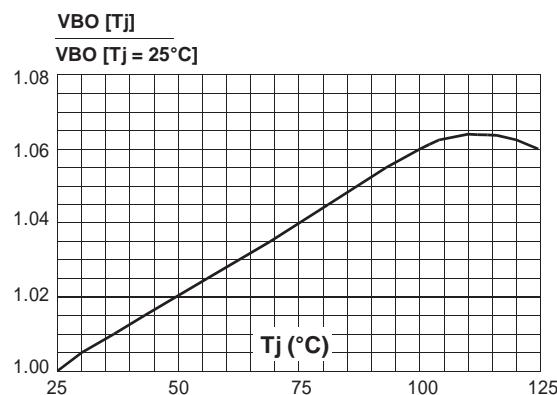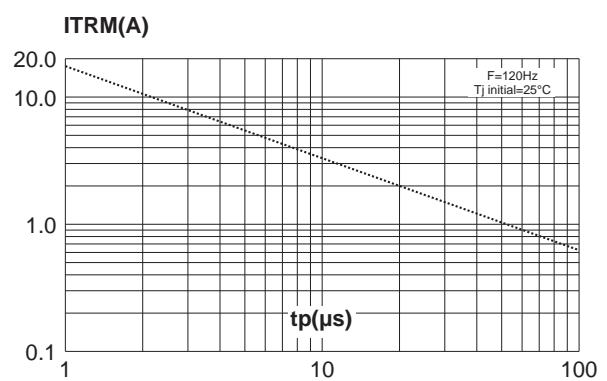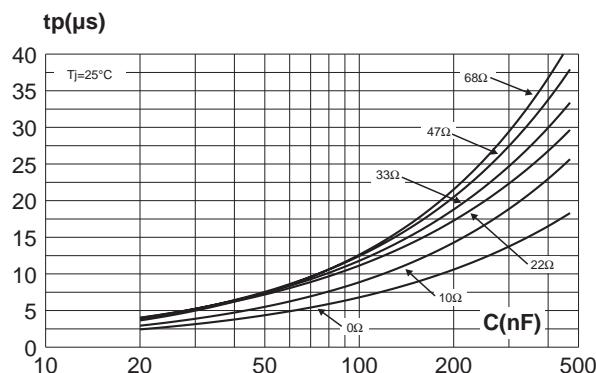

PACKAGE MECHANICAL DATA (in millimeters) MINIMELF

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	3.30	3.40	3.6	0.130	0.134	0.142
B	1.59	1.60	1.62	0.063	0.063	0.064
C	0.40	0.45	0.50	0.016	0.018	0.020
D			1.50			0.059

FOOTPRINT

