

MAXIM**Precision, Quad, SPST Analog Switches****General Description**

The MAX391/MAX392/MAX393 are precision, quad, single-pole/single-throw (SPST) analog switches designed to operate at +3V, +5V, or \pm 5V. The MAX391 has four normally closed (NC) switches, and the MAX392 has four normally open (NO) switches. The MAX393 has two NO and two NC switches. All three devices offer low leakage (100pA max) and fast switching speeds ($t_{ON} \leq 130$ ns, $t_{OFF} \leq 75$ ns). Power consumption is just 1 μ W—ideal for battery-operated equipment. All devices operate from a single +3V to +15V supply or from dual \pm 3.0V to \pm 8V supplies.

With \pm 5V supplies, the MAX391/MAX392/MAX393 offer guaranteed 2 Ω max channel-to-channel matching, 30 Ω max on-resistance (R_{ON}), and 4 Ω max R_{ON} flatness over the specified range.

These switches are also fully specified for single +5V operation, with 2 Ω max R_{ON} match, 60 Ω max R_{ON} , and 6 Ω max flatness.

These low-voltage switches also offer 5pC max charge injection, and ESD protection is greater than 2000V, per method 3015.7.

Applications

Battery-Operated Systems	Sample-and-Hold Circuits
Heads-Up Displays	Guidance and Control Systems
Audio and Video Switching	Military Radios
Test Equipment	Communications Systems
\pm 5V DACs and ADCs	PBX, PABX

Features

- ◆ Low On-Resistance, 20 Ω Typical
- ◆ Guaranteed On-Resistance Match Between Channels, <2 Ω
- ◆ Guaranteed On-Resistance Flatness Over Signal Range, 4 Ω Max
- ◆ Guaranteed Charge Injection, <5pC
- ◆ Improved Leakage Over Temperature, <2.5nA at +85°C
- ◆ Electrostatic Discharge >2000V per Method 3015.7
- ◆ Single-Supply Operation (+3V to +15V) Bipolar-Supply Operation (\pm 3V to \pm 8V)
- ◆ Low Power Consumption, <1 μ W
- ◆ TTL/CMOS-Logic Compatible


Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
MAX391CPE	0°C to +70°C	16 Plastic DIP
MAX391CSE	0°C to +70°C	16 Narrow SO
MAX391CUE	0°C to +70°C	16 TSSOP
MAX391C/D	0°C to +70°C	Dice*
MAX391EPE	-40°C to +85°C	16 Plastic DIP
MAX391ESE	-40°C to +85°C	16 Narrow SO
MAX391EUE	-40°C to +85°C	16 TSSOP

Ordering Information continued at end of data sheet.

* Contact factory for dice specifications.

** Contact factory for availability and processing to MIL-STD-883.

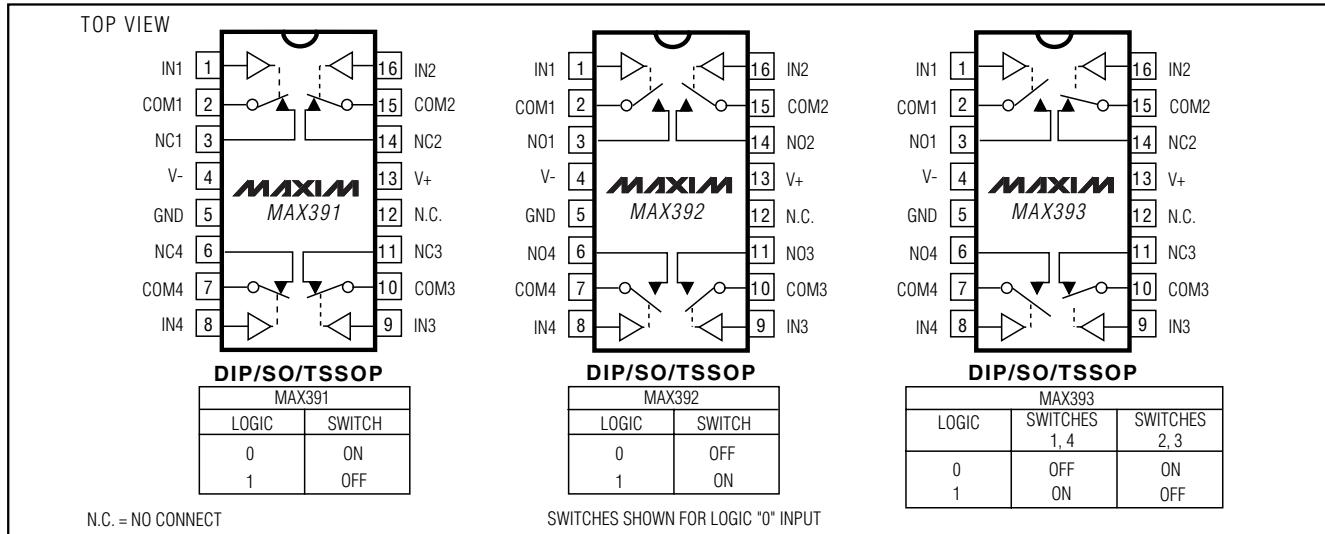Pin Configurations/Functional Diagrams/Truth Tables**MAXIM**

Maxim Integrated Products 1

For free samples & the latest literature: <http://www.maxim-ic.com>, or phone 1-800-998-8800.
For small orders, phone 1-800-835-8769.

MAX391/MAX392/MAX393

Precision, Quad, SPST Analog Switches

ABSOLUTE MAXIMUM RATINGS

Voltage Referenced to V-

V ₊	-0.3V to +17V
GND.....	-0.3V to +17V
GND.....	-0.3V to (V ₊ + 0.3V)
V _{IN} , V _{COM} , V _{NC} , V _{NO} (Note 1)	V ₋ to V ₊
Current (any terminal)	30mA
Peak Current, COM, NO, NC (pulsed at 1ms, 10% duty cycle max)	100mA
ESD per Method 3015.7	>2000V

Note 1: Signals on NC, NO, COM, or IN exceeding V₊ or V₋ are clamped by internal diodes. Limit forward diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—Dual Supplies

(V₊ = +5V ±10%, V₋ = -5V ±10%, GND = 0V, V_{INH} = 2.4V, V_{INL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
ANALOG SWITCH							
Analog Signal Range	V _{COM} , V _{NO} , V _{NC}	(Note 3)		V ₋		V ₊	V
On-Resistance	R _{ON}	V ₊ = 4.5V, V ₋ = -4.5V, I _{COM} = -10mA, V _{NO} or V _{NC} = ±3.5V	TA = +25°C	C, E	20	35	Ω
			M		20	30	
			TA = T _{MIN} to T _{MAX}			45	
On-Resistance Match Between Channels (Note 4)	ΔR _{ON}	V ₊ = 5V, V ₋ = -5V, I _{COM} = -10mA, V _{NO} or V _{NC} = ±3V	TA = +25°C		0.3	2	Ω
			TA = T _{MIN} to T _{MAX}			4	
On-Resistance Flatness (Note 5)	R _{FLAT(ON)}	V ₊ = 5V, V ₋ = -5V, I _{COM} = -10mA, V _{NO} or V _{NC} = ±3V	TA = +25°C		1	4	Ω
			TA = T _{MIN} to T _{MAX}			6	
NO or NC Off Leakage Current (Note 6)	I _{NO(OFF)} or I _{NC(OFF)}	V ₊ = 5.5V, V ₋ = -5.5V, V _{COM} = ±4.5V, V _{NO} or V _{NC} = ±4.5V	TA = +25°C		-0.1	0.01	nA
			TA = T _{MIN} to T _{MAX}	C, E	-2.5	2.5	
				M	-5	5	
COM Off Leakage Current (Note 6)	I _{COM(OFF)}	V ₊ = 5.5V, V ₋ = -5.5V, V _{COM} = ±4.5V, V _{NO} or V _{NC} = ±4.5V	TA = +25°C		-0.1	0.01	nA
			TA = T _{MIN} to T _{MAX}	C, E	-2.5	2.5	
				M	-5	5	
COM On Leakage Current (Note 6)	I _{COM(ON)}	V ₊ = 5.5V, V ₋ = -5.5V, V _{COM} = ±4.5V, V _{NO} or V _{NC} = ±4.5V	TA = +25°C		-0.2	0.01	nA
			TA = T _{MIN} to T _{MAX}	C, E	-5.0	5.0	
				M	-20	20	

Precision, Quad, SPST Analog Switches

ELECTRICAL CHARACTERISTICS—Dual Supplies (continued)

($V_+ = +5V \pm 10\%$, $V_- = -5V \pm 10\%$, GND = 0V, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
LOGIC INPUT							
Input Current with Input Voltage High	I_{INH}	$V_{IN} = 2.4V$, all others = 0.8V		-0.5	0.005	0.5	μA
Input Current with Input Voltage Low	I_{INL}	$V_{IN} = 0.8V$, all others = 2.4V		-0.5	0.005	0.5	μA
DYNAMIC							
Turn-On Time	t_{ON}	$V_{COM} = \pm 3V$, Figure 2	$T_A = +25^\circ C$	65		130	ns
			$T_A = T_{MIN}$ to T_{MAX}	175			
Turn-Off Time	t_{OFF}	$V_{COM} = \pm 3V$, Figure 2	$T_A = +25^\circ C$	35		75	ns
			$T_A = T_{MIN}$ to T_{MAX}	100			
Break-Before-Make Time Delay (Note 3)	t_D	MAX393 only, $R_L = 300\Omega$, $C_L = 35pF$, Figure 3		5	10		ns
Charge Injection (Note 3)	Q	$C_L = 1.0nF$, $V_{GEN} = 0V$, $R_{GEN} = 0\Omega$, Figure 4	$T_A = +25^\circ C$	2		5	pC
Off Isolation (Note 7)	OIRR	$R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$, Figure 5	$T_A = +25^\circ C$	72			dB
Crosstalk (Note 8)		$R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$, Figure 6	$T_A = +25^\circ C$	85			dB
NC or NO Capacitance	$C_{(OFF)}$	$f = 1MHz$, Figure 7	$T_A = +25^\circ C$	9			pF
COM Off Capacitance	$C_{COM(OFF)}$	$f = 1MHz$, Figure 7	$T_A = +25^\circ C$	9			pF
COM On Capacitance	$C_{COM(ON)}$	$f = 1MHz$, Figure 8	$T_A = +25^\circ C$	22			pF
SUPPLY							
Power-Supply Range				-8.0	+8.0		V
Positive Supply Current	I_+	$V_+ = 5.5V$, $V_- = -5.5V$, $V_{IN} = 0V$ or V_+ , All channels on or off	$T_A = T_{MIN}$ to T_{MAX}	-1	1		μA
Negative Supply Current	I_-	$V_+ = 5.5V$, $V_- = -5.5V$, $V_{IN} = 0V$ or V_+ , All channels on or off	$T_A = T_{MIN}$ to T_{MAX}	-1	1		μA

Precision, Quad, SPST Analog Switches

ELECTRICAL CHARACTERISTICS—Single +5V Supply

($V_+ = +5V \pm 10\%$, $V_- = 0V \pm 10\%$, GND = 0V, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP (Note 2)	MAX	UNITS	
ANALOG SWITCH								
Analog Signal Range	V_{COM} , V_{NO} , V_{NC}	(Note 3)		0	V_+		V	
On-Resistance	R_{ON}	$V_+ = 4.5V$, $I_{COM} = -10mA$, V_{NO} or $V_{NC} = 3.5V$	$T_A = +25^\circ C$	30	60	Ω		
			$T_A = T_{MIN}$ to T_{MAX}		75			
On-Resistance Match Between Channels (Note 4)	ΔR_{ON}	$V_+ = 5V$, $I_{COM} = -1.0mA$, V_{NO} or $V_{NC} = 3V$	$T_A = +25^\circ C$	0.8	2	Ω		
			$T_A = T_{MIN}$ to T_{MAX}		4			
On-Resistance Flatness (Notes 3, 5)	$R_{FLAT(ON)}$	$V_+ = 5V$, $I_{COM} = -1.0mA$, V_{NO} or $V_{NC} = 1V$, 3V	$T_A = +25^\circ C$	2	6	Ω		
			$T_A = T_{MIN}$ to T_{MAX}		8			
NO or NC Off Leakage Current (Note 9)	$I_{NO(OFF)}$ or $I_{NC(OFF)}$	$V_+ = 5.5V$, $V_{COM} = 0V$, V_{NO} or $V_{NC} = 4.5V$	$T_A = +25^\circ C$	-0.25	0.01	0.25	nA	
			$T_A = T_{MIN}$ to T_{MAX}	C, E	-0.1	0.1		
COM Off Leakage Current (Note 9)	$I_{COM(OFF)}$	$V_+ = 5.5V$, $V_{COM} = 0V$, V_{NO} or $V_{NC} = 4.5V$	$T_A = +25^\circ C$	-0.1	0.1		nA	
			$T_A = T_{MIN}$ to T_{MAX}	C, E	-2.5	2.5		
COM On Leakage Current (Note 9)	$I_{COM(ON)}$	$V_+ = 5.5V$, $V_{COM} = 5V$, V_{NO} or $V_{NC} = 4.5V$	$T_A = +25^\circ C$	-0.2	0.2		nA	
			$T_A = T_{MIN}$ to T_{MAX}	C, E	-5.0	5.0		
				M	-20	20		
DYNAMIC								
Turn-On Time	t_{ON}	V_{NO} or $V_{NC} = 3V$	$T_A = +25^\circ C$	85	170	ns		
			$T_A = T_{MIN}$ to T_{MAX}		240			
Turn-Off Time	t_{OFF}	V_{NO} or $V_{NC} = 3V$	$T_A = +25^\circ C$	25	50	ns		
			$T_A = T_{MIN}$ to T_{MAX}		100			
Break-Before-Make Time Delay (Note 3)	t_D	MAX393 only, $R_L = 300\Omega$, $C_L = 35pF$		10		ns		
Charge Injection (Note 3)	Q	$C_L = 1.0nF$, $V_{GEN} = 0V$, $R_{GEN} = 0\Omega$, Figure 4	$T_A = +25^\circ C$	1	5	pC		
SUPPLY								
Positive Supply Current	I_+	$V_+ = 5.5V$, $V_{IN} = 0V$ or V_+ , all channels on or off		-1	1	μA		
Negative Supply Current	I_-	$V_+ = 5.5V$, $V_{IN} = 0V$ or V_+ , all channels on or off		-1	1	μA		

Precision, Quad, SPST Analog Switches

ELECTRICAL CHARACTERISTICS—Single +3.3V Supply

(V₊ = +3.0V to +3.6V, GND = 0V, V_{INH} = 2.4V, V_{INL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP (Note 2)	MAX	UNITS	
ANALOG SWITCH								
Analog Signal Range	V _{COM} , V _{NO} , V _{NC}	(Note 3)		0		V ₊	V	
Channel On-Resistance	R _{ON}	V ₊ = 3V, I _{COM} = -1.0mA, V _{NO} or V _{NC} = 1.5V	T _A = +25°C	83	175	Ω		
		T _A = T _{MIN} to T _{MAX}		275				
DYNAMIC								
Turn-On Time (Note 3)	t _{ON}	V _{NO} or V _{NC} = 1.5V	T _A = +25°C	160	400	ns		
			T _A = T _{MIN} to T _{MAX}	500				
Turn-Off Time (Note 3)	t _{OFF}	V _{NO} or V _{NC} = 1.5V	T _A = +25°C	40	125	ns		
			T _A = T _{MIN} to T _{MAX}	175				
Break-Before-Make Time Delay (Note 3)	t _D	MAX393 only, R _L = 300Ω, C _L = 35pF	T _A = +25°C	20		ns		
Charge Injection (Note 3)	Q	C _L = 1.0nF, V _{GEN} = 0V, R _{GEN} = 0V	T _A = +25°C	1	5	pC		
SUPPLY								
Positive Supply Current	I ₊	V ₊ = 3.6V, V _{IN} = 0V or V ₊ , all channels on or off		-1	1	μA		
Negative Supply Current	I ₋	V ₊ = 3.6V, V _{IN} = 0V or V ₊ , all channels on or off		-1	1	μA		

Note 2: The algebraic convention, where the most negative value is a minimum and the most positive value a maximum, is used in this data sheet.

Note 3: Guaranteed by design.

Note 4: ΔR_{ON} = ΔR_{ON} max - ΔR_{ON} min.

Note 5: Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal range.

Note 6: Leakage parameters are 100% tested at maximum rated hot temperature and guaranteed by correlation at +25°C.

Note 7: Off Isolation = $20\log_{10} [V_{COM} / (V_{NC} \text{ or } V_{NO})]$, V_{COM} = output, V_{NC} or V_{NO} = input to off switch.









Note 8: Between any two switches.

Note 9: Leakage testing at single supply is guaranteed by testing with dual singles.

Precision, Quad, SPST Analog Switches

($T_A = +25^\circ\text{C}$, unless otherwise noted.)

Typical Operating Characteristics

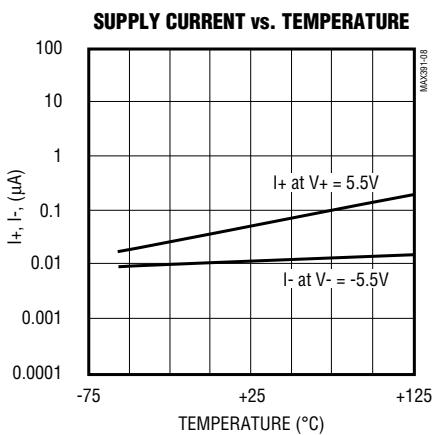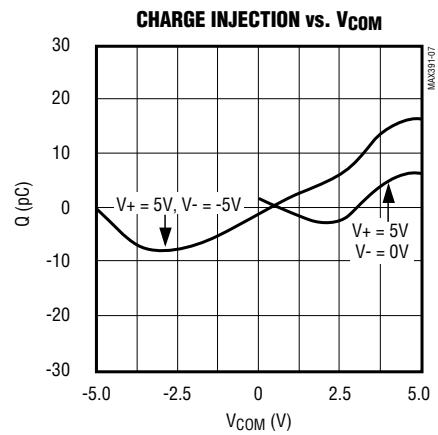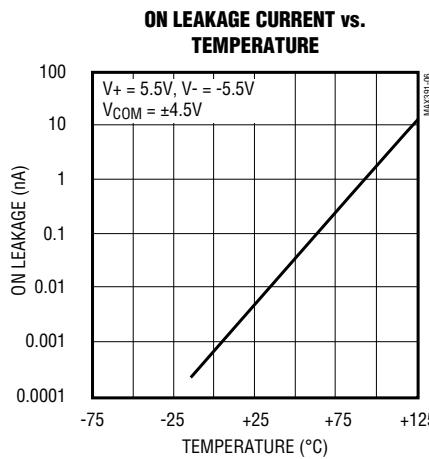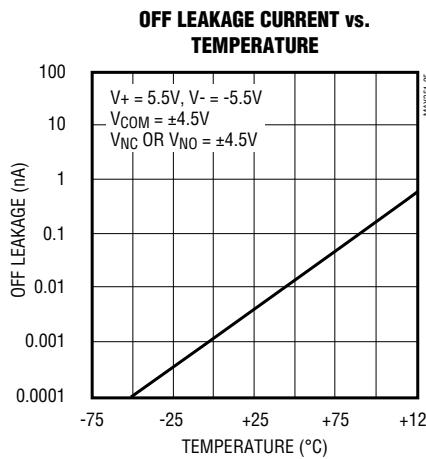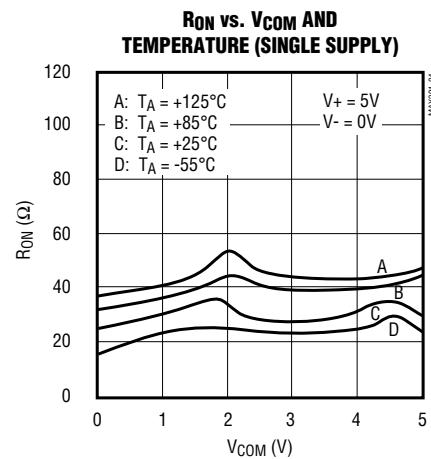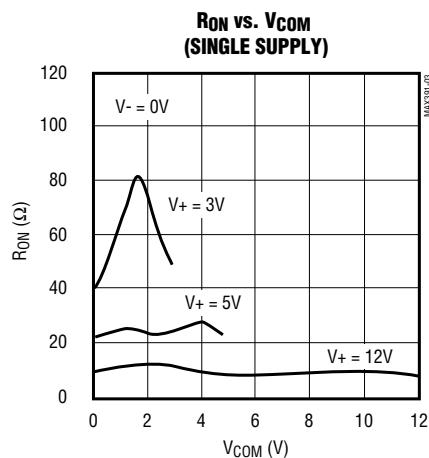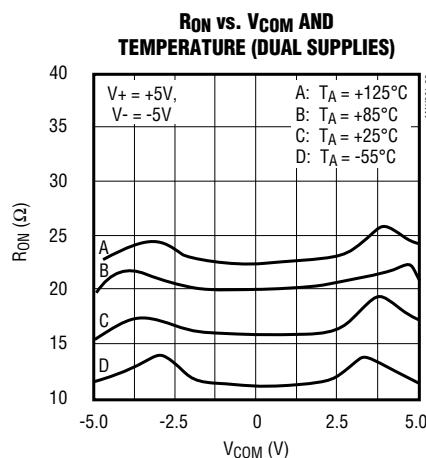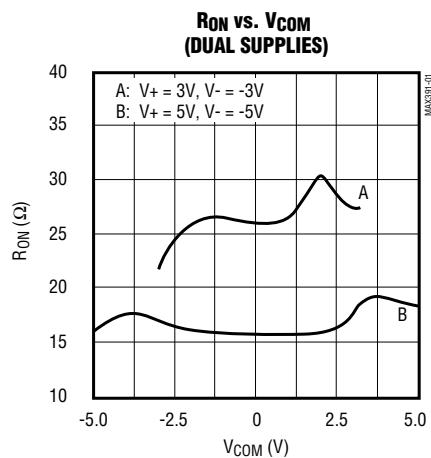

Precision, Quad, SPST Analog Switches

Pin Description

PIN	NAME	FUNCTION
1, 16, 9, 8	IN1-IN4	Inputs
2, 15, 10, 7	COM1-COM4	Analog Switch Common Terminal
3, 14, 11, 6	NO1-NO4 or NC1-NC4	Switch Inputs
4	V-	Negative Supply-Voltage Input
5	GND	Ground
12	N.C.	No Connect—not internally connected
13	V+	Positive Supply-Voltage Input—connected to substrate

Applications Information

Overvoltage Protection

Proper power-supply sequencing is recommended for all CMOS devices. Do not exceed the absolute maximum ratings, because stresses beyond the listed ratings may cause permanent damage to the devices. Always sequence V+ on first, followed by V-, and then logic inputs. If power-supply sequencing is not possible, add two small signal diodes in series with supply pins for overvoltage protection (Figure 1). Adding diodes reduces the analog signal range to 1V below V+ and 1V below V-, but low switch resistance and low leakage characteristics are unaffected. Device operation is unchanged, and the difference between V+ and V- should not exceed 17V.

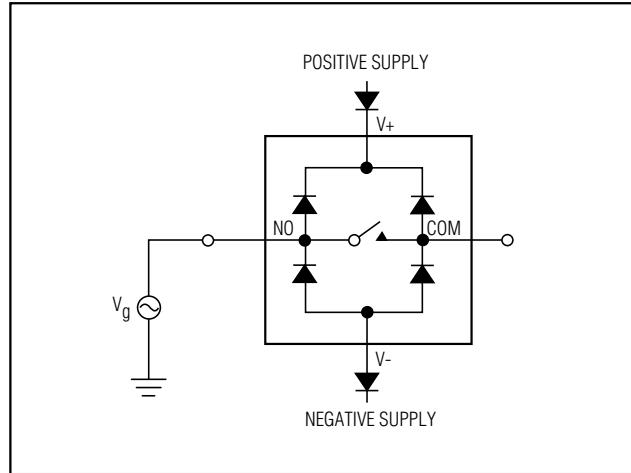


Figure 1. Overvoltage Protection Using Two External Blocking Diodes

Precision, Quad, SPST Analog Switches

Test Circuits/Timing Diagrams

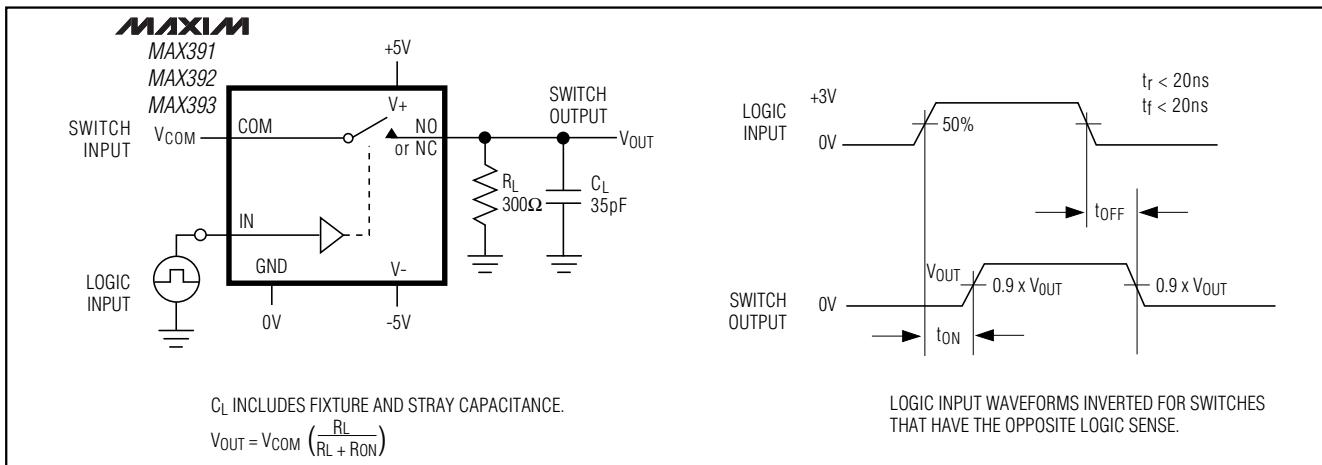


Figure 2. Switching Time

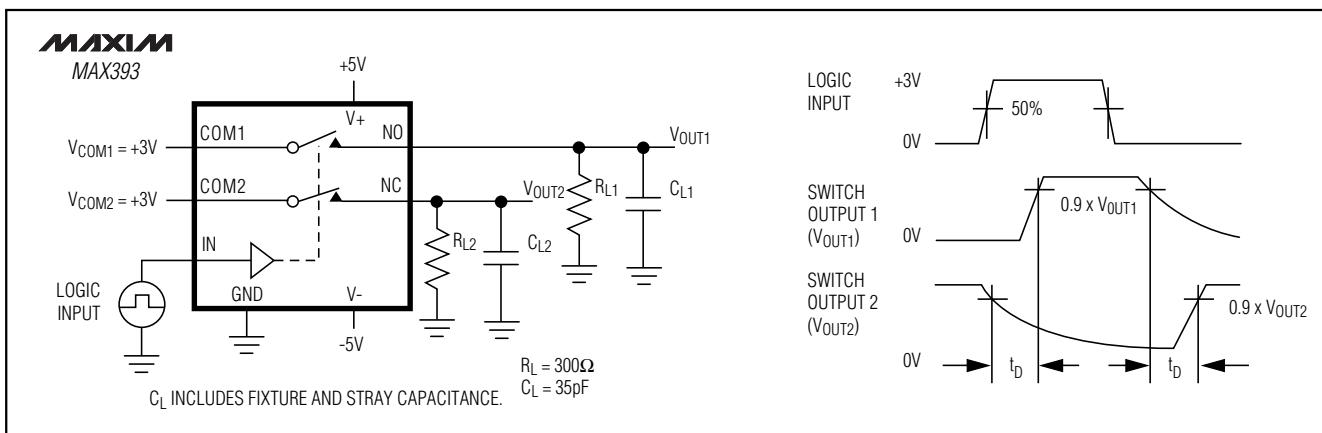


Figure 3. Break-Before-Make Interval (MAX393 only)

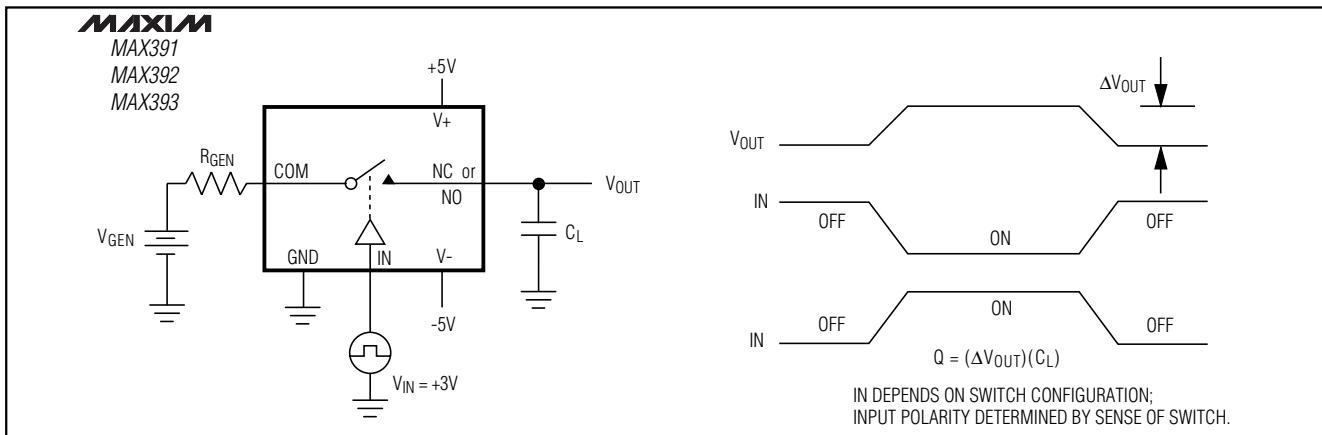


Figure 4. Charge Injection

Precision, Quad, SPST Analog Switches

Test Circuits/Timing Diagrams (continued)

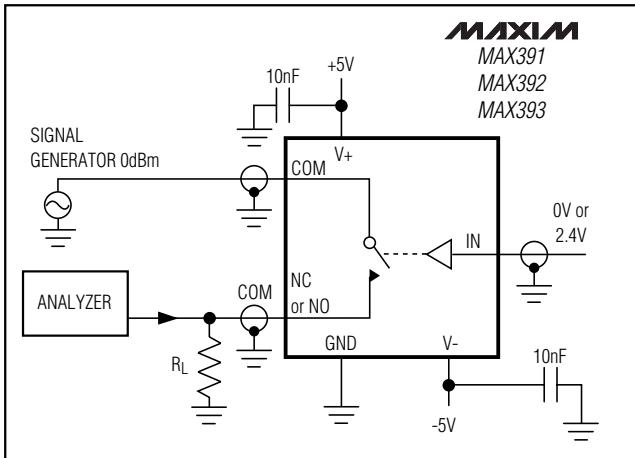


Figure 5. Isolation

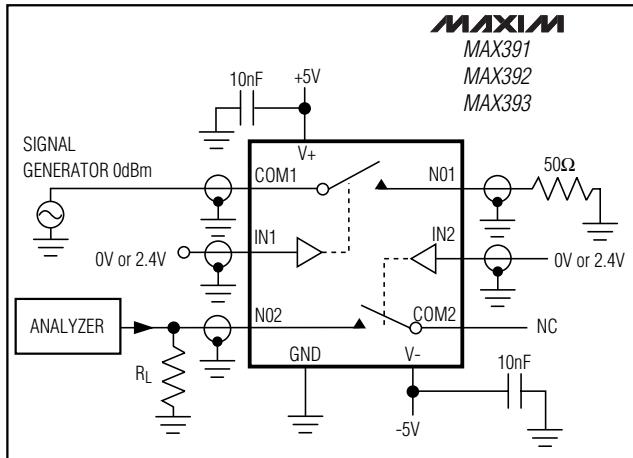


Figure 6. Crosstalk

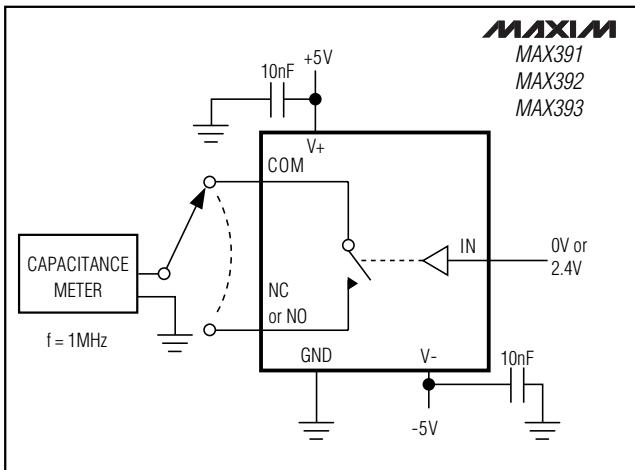


Figure 7. Channel-Off Capacitance

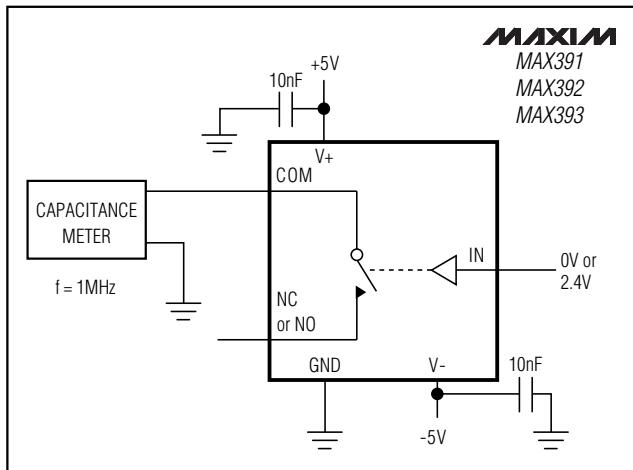


Figure 8. Channel-On Capacitance

Precision, Quad, SPST Analog Switches


Ordering Information (continued)

PART	TEMP. RANGE	PIN-PACKAGE
MAX391EJE	-40°C to +85°C	16 CERDIP
MAX391MJE	-55°C to +125°C	16 CERDIP**
MAX392CPE	0°C to +70°C	16 Plastic DIP
MAX392CSE	0°C to +70°C	16 Narrow SO
MAX392CUE	0°C to +70°C	16 TSSOP
MAX392C/D	0°C to +70°C	Dice*
MAX392EPE	-40°C to +85°C	16 Plastic DIP
MAX392ESE	-40°C to +85°C	16 Narrow SO
MAX392EUE	-40°C to +85°C	16 TSSOP
MAX392EJE	-40°C to +85°C	16 CERDIP
MAX392MJE	-55°C to +125°C	16 CERDIP**
MAX393CPE	0°C to +70°C	16 Plastic DIP
MAX393CSE	0°C to +70°C	16 Narrow SO
MAX393CUE	0°C to +70°C	16 TSSOP
MAX393C/D	0°C to +70°C	Dice*
MAX393EPE	-40°C to +85°C	16 Plastic DIP
MAX393ESE	-40°C to +85°C	16 Narrow SO
MAX393EUE	-40°C to +85°C	16 TSSOP
MAX393EJE	-40°C to +85°C	16 CERDIP
MAX393MJE	-55°C to +125°C	16 CERDIP**

* Contact factory for dice specifications.

** Contact factory for availability and processing to MIL-STD-883B.

Chip Topography

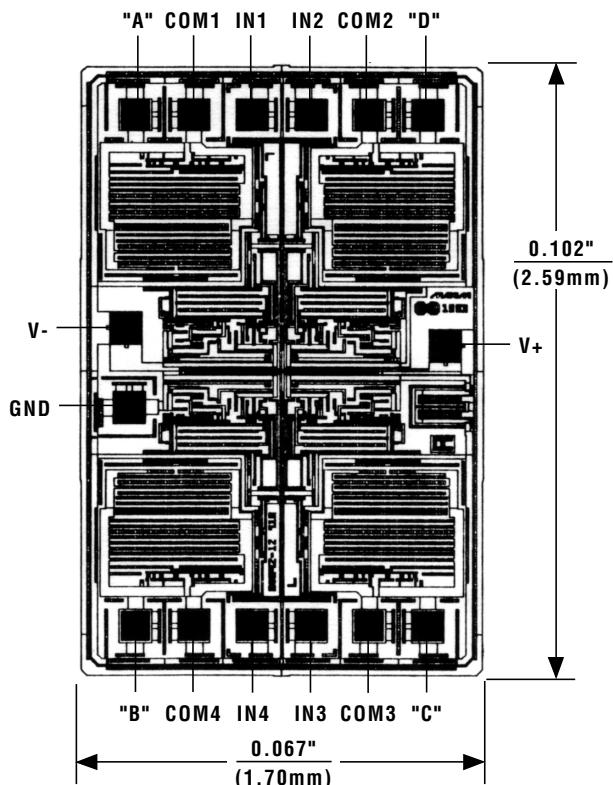

MAX391		MAX392		MAX393	
PIN	NAME	PIN	NAME	PIN	NAME
A	NC1	A	N01	A	N01
B	NC4	B	N04	B	N04
C	NC3	C	N03	C	NC3
D	NC2	D	N02	D	NC2

TRANSISTOR COUNT: 76
SUBSTRATE CONNECTED TO V+

Precision, Quad, SPST Analog Switches

Package Information

TSSOP-EP

TOP VIEW

BOTTOM VIEW

SIDE VIEW

END VIEW

LEAD TIP DETAIL

NOTES:

1. DIMENSIONS D AND E DO NOT INCLUDE FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15 mm PER SIDE.
3. CONTROLLING DIMENSION: MILLIMETER.
4. MEETS JEDEC OUTLINE MO-153 VARIATIONS AB, AC, AD, AE, AF.
5. DIMENSIONS X AND Y APPLY TO EXPOSED PAD (EP) VERSIONS ONLY.
6. EXPOSED PAD FLUSH WITH BOTTOM OF PACKAGE WITHIN .002".

S Y Z B O	COMMON DIMENSIONS			
	MILLIMETERS	INCHES	MIN.	MAX.
A	—	.110	.043	
A ₁	.05	.015	.002	.006
A ₂	.85	.95	.033	.037
b	.19	.30	.007	.012
b ₁	.19	.25	.007	.010
c	.090	.20	.0035	.008
c ₁	.090	.135	.0035	.0053
D	SEE VARIATIONS	SEE VARIATIONS		
E	4.30	4.50	.169	.177
e	.65 BSC		.026 BSC	
H	6.25	6.50	.246	.256
L	.50	.70	.020	.028
N	SEE VARIATIONS	SEE VARIATIONS		
Y	2.85	3.15	.112	.124
a	0°	8°	0°	8°


JEDEC	VARIATIONS				
	MO-153	N	MILLIMETERS	INCHES	
AB	14	D	4.90	.193	.201
AC	16	D	4.90	.193	.201
AC-EP	16	D	4.90	.193	.201
		X	2.85	.112	.124
AD	20	D	6.40	.252	.260
AD-EP	20	D	6.40	.252	.260
		X	4.00	.157	.171
AE	24	D	7.70	.303	.311
AF	28	D	9.60	.378	.386
AF-EP	28	D	9.60	.378	.386
		X	5.35	.211	.222

MAXIM
PROPRIETARY INFORMATION
TITLE: PACKAGE OUTLINE, TSSOP, 4.40mm BODY, 0.65mm PITCH

APPROVAL	DOCUMENT CONTROL NO.	REV
	21-0066	C / 1

Precision, Quad, SPST Analog Switches

Package Information (continued)

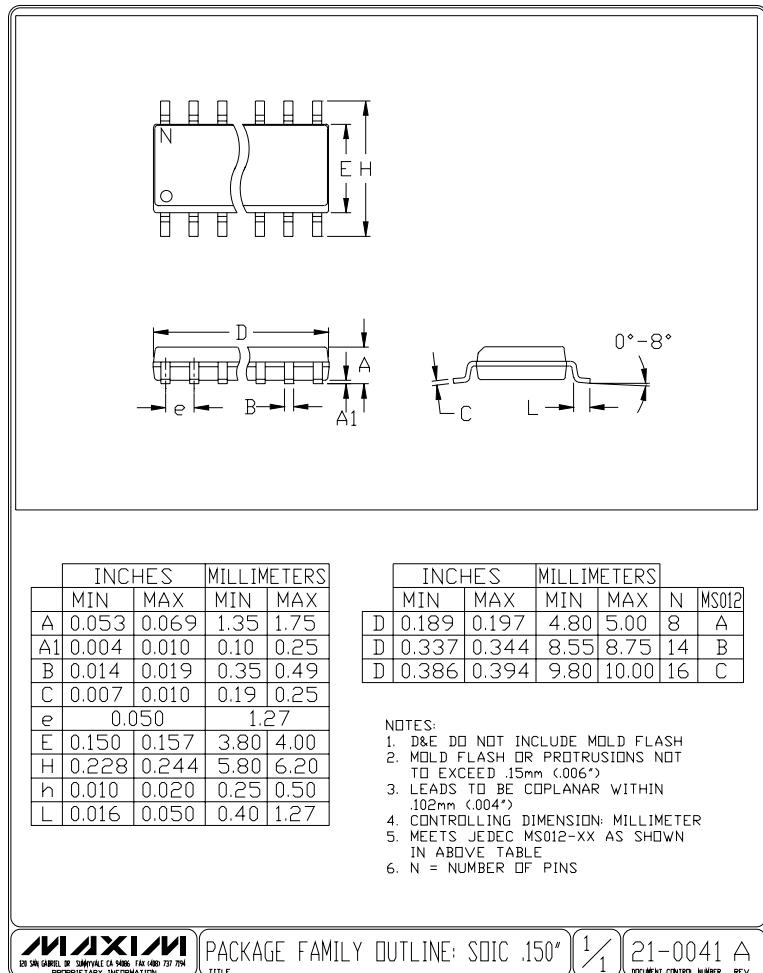

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**