

# Surface Mount Schottky Power Rectifier SMA/SMB Power Surface Mount Package

### MBRS2H100T3G, NBRS2H100T3G, NBRS2H100NT3G, MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G

This device employs the Schottky Barrier principle in a metal-to-silicon power rectifier. Features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency switching power supplies; free wheeling diodes and polarity protection diodes.

#### **Features**

- Compact Package with J-Bend Leads Ideal for Automated Handling
- Highly Stable Oxide Passivated Junction
- Guard-Ring for Overvoltage Protection
- Low Forward Voltage Drop
- NBR and NRVB Prefixes for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable\*

#### **Mechanical Characteristics**

- Case: Molded Epoxy
- Epoxy Meets UL 94 V-0 @ 0.125 in
- Weight: 70 mg (SMA), 95 mg (SMB) (Approximately)
- Cathode Polarity Band
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable

1

- ESD Ratings:
  - ◆ Charged Device Model > 1000 V (Class C5)
  - ◆ Human Body Model = 3B
- These Devices are Pb-Free and are RoHS Compliant
- Device Meets MSL1 Requirements

### SCHOTTKY BARRIER RECTIFIER 2.0 AMPERES, 100 VOLTS

MARKING DIAGRAMS



SMA CASE 403D





SMB CASE 403A



A210 = MBRA2H100T3G

NRVBA2H100T3G

B210 = MBRS2H100T3G NBRS2H100T3G

A = Assembly Location

Y = Year WW = Work Week ■ = Pb-Free Package

(Note: Microdot may be in either location)

\*\*The Assembly Location code (A) is front side optional. In cases where the Assembly Location is stamped in the package, the front side assembly code may be blank.

### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MBRA2H100T3G, NRVBA2H100T3G*	SMA (Pb-Free)	5,000 / Tape & Reel
MBRS2H100T3G, NBRS2H100T3G* NBRS2H100NT3G*, NBRS2H100T3G-VF01*	SMB (Pb-Free)	2,500 / Tape & Reel
NRVBA2H100NT3G*	SMA (Pb-Free)	5,000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

### $\begin{array}{c} \mathsf{MBRS2H100T3G},\,\mathsf{NBRS2H100T3G},\,\mathsf{NBRS2H100NT3G},\,\mathsf{MBRA2H100T3G},\\ \mathsf{NRVBA2H100T3G},\,\mathsf{NRVBA2H100NT3G} \end{array}$

### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	100	V
Average Rectified Forward Current (T <sub>L</sub> = 150°C)	lo	2.0	Α
Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I <sub>FSM</sub>	130	Α
Storage Temperature Range	T <sub>stg</sub>	-65 to +175	°C
Operating Junction Temperature (Note 1)	TJ	-65 to +175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction-to-Lead (Note 2) MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G MBRS2H100T3G, NBRS2H100T3G, NBRS2H100NT3G	$\Psi_{JCL}$	14 12	°C/W
Thermal Resistance, Junction-to-Ambient (Note 2) MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G MBRS2H100T3G, NBRS2H100T3G, NBRS2H100NT3G	$R_{ hetaJA}$	75 71	°C/W
Thermal Resistance, Junction-to-Ambient (Note 3) MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G MBRS2H100T3G, NBRS2H100T3G, NBRS2H100NT3G	$R_{ hetaJA}$	275 230	°C/W

<sup>2.</sup> Mounted with 700 mm square copper pad size (Approximately 1 inch square) 1 oz FR4 Board.

### **ELECTRICAL CHARACTERISTICS**

		Val	ue	
Characteristic	Symbol	T <sub>J</sub> = 25°C	T <sub>J</sub> = 125°C	Unit
Maximum Instantaneous Forward Voltage (Note 4) (i <sub>F</sub> = 2.0 A)	VF	0.79	0.65	٧
Maximum Instantaneous Reverse Current (Note 4) (V <sub>R</sub> = 100 V)	I <sub>R</sub>	0.008	1.5	mA

<sup>4.</sup> Pulse Test: Pulse Width  $\leq$  380  $\mu s,$  Duty Cycle  $\leq$  2.0%.

<sup>1.</sup> The heat generated must be less than the thermal conductivity from Junction–to–Ambient:  $dP_D/dT_J < 1/R_{\theta JA}$ .

<sup>3.</sup> Mounted with minimum recommended pad size 1 oz FR4 Board.

### MBRS2H100T3G, NBRS2H100T3G, NBRS2H100NT3G, MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G

### **TYPICAL CHARACTERISTICS**

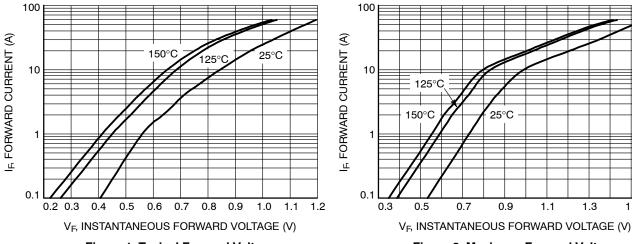


Figure 1. Typical Forward Voltage

Figure 2. Maximum Forward Voltage

1.5

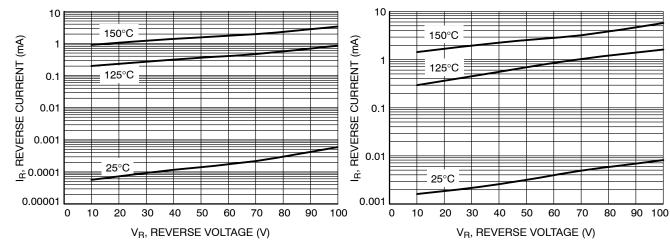


Figure 3. Typical Reverse Current

**Figure 4. Maximum Reverse Current** 

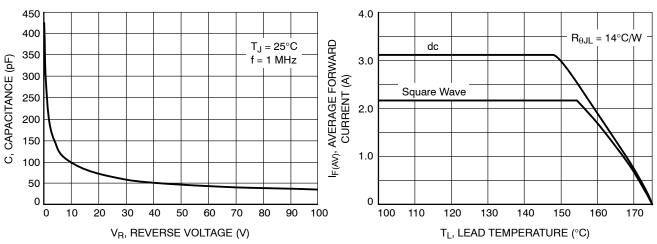



Figure 5. Typical Capacitance

Figure 6. Current Derating - Lead

### MBRS2H100T3G, NBRS2H100T3G, NBRS2H100NT3G, MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G

### **TYPICAL CHARACTERISTICS**






Figure 7. Current Derating, Ambient

Figure 8. Maximum Forward Power Dissipation

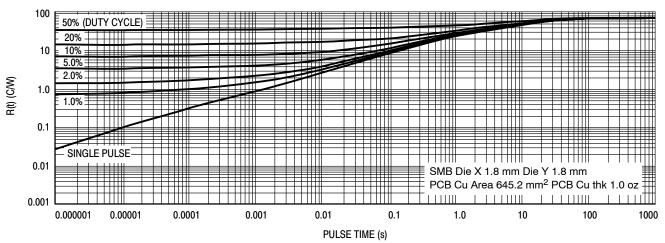


Figure 9. Thermal Response, Junction-to-Ambient (1 inch pad) – MBRS2H100T3G/NBRS2H100T3G/NBRS2H100NT3G

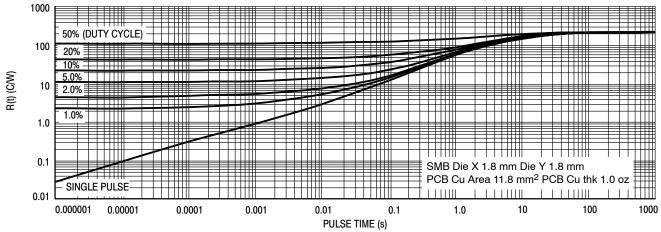


Figure 10. Thermal Response, Junction-to-Ambient (min pad) – MBRS2H100T3G/NBRS2H100T3G/NBRS2H100NT3G

### MBRS2H100T3G, NBRS2H100T3G, NBRS2H100NT3G, MBRA2H100T3G, NRVBA2H100NT3G

### **TYPICAL CHARACTERISTICS**

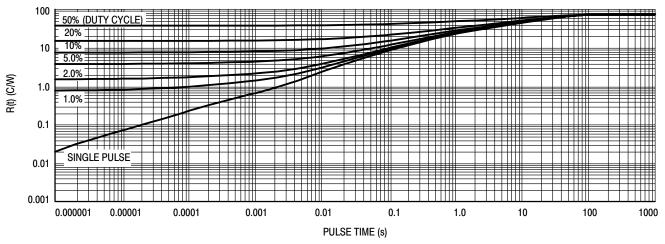


Figure 11. Thermal Response, Junction-to-Ambient (1 inch pad) - MBRA2H100T3G/NRVBA2H100T3G

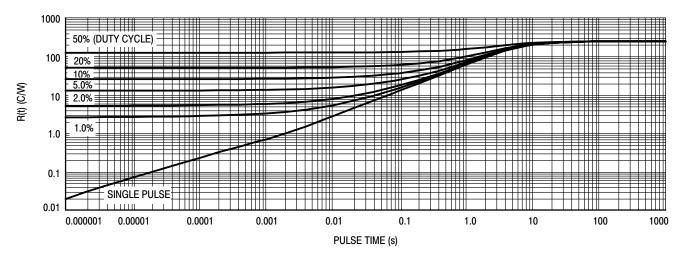


Figure 12. Thermal Response, Junction-to-Ambient (min pad) - MBRA2H100T3G/NRVBA2H100T3G




Figure 13. P<sub>D</sub>, Junction-to-Ambient (URS copper area)







**SMB** CASE 403A-03 **ISSUE J** 


**DATE 19 JUL 2012** 

SCALE 1:1 **Polarity Band** 


Non-Polarity Band







### **SOLDERING FOOTPRINT\***

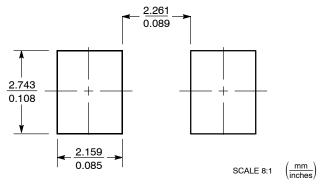

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCL.
- 3. DIMENSION b SHALL BE MEASURED WITHIN DIMENSION L1.

	MILLIMETERS				INCHES	
DIM	MIN	NOM	MAX	MIN	MOM	MAX
Α	1.95	2.30	2.47	0.077	0.091	0.097
A1	0.05	0.10	0.20	0.002	0.004	0.008
b	1.96	2.03	2.20	0.077	0.080	0.087
С	0.15	0.23	0.31	0.006	0.009	0.012
D	3.30	3.56	3.95	0.130	0.140	0.156
E	4.06	4.32	4.60	0.160	0.170	0.181
HE	5.21	5.44	5.60	0.205	0.214	0.220
L	0.76	1.02	1.60	0.030	0.040	0.063
L1		0.51 REF			0.020 REF	

### **GENERIC MARKING DIAGRAM\***





**Polarity Band** 

Non-Polarity Band

XXXXX = Specific Device Code = Assembly Location Α

= Year WW = Work Week = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

DOCUMENT NUMBER:	98ASB42669B	Electronic versions are uncontrolled except when accessed directly from the Document Rep Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SMB		PAGE 1 OF 1

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.







STYLE 1 STYLE 2

SCALE 1:1





**DATE 22 OCT 2021** 

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- 2. CONTROLLING DIMENSION: INCHES
- DIMENSION 6 SHALL BE MEASURED WITHIN DIMENSION L.

	MILLIMETERS			INCHES		
DIM	MIN.	N□M.	MAX.	MIN.	N□M.	MAX.
Α	1.97	2.10	2.20	0.078	0.083	0.087
A1	0.05	0.10	0.20	0.002	0.004	0.008
b	1.27	1.45	1.63	0.050	0.057	0.064
С	0.15	0.28	0.41	0.006	0.011	0.016
D	2.29	2.60	2.92	0.090	0.103	0.115
Ε	4.06	4.32	4.57	0.160	0.170	0.180
HE	4.83	5.21	5.59	0.190	0.205	0.220
L	0.76	1.14	1.52	0.030	0.045	0.060

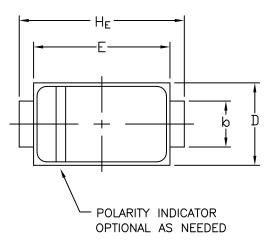




STYLE 1: PIN 1. CATHODE (POLARITY BAND) STYLE 2: 2. ANODE

## NO POLARITY


### **GENERIC MARKING DIAGRAM\***



= Specific Device Code XXXX Α = Assembly Location

= Year WW = Work Week = Pb-Free Package

\*This information is generic. Please refer to

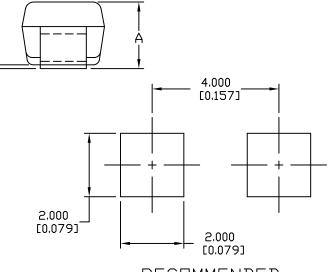

RECOMMENDED MOUNTING FOOTPRINT

device data sheet for actual part marking.
Pb-Free indicator, "G" or microdot "■", may
or may not be present. Some products may
not follow the Generic Marking.
· ·

00 1 ON 0 10 TOD	Electronic versions are uncontrolled except when accessed directly from the Document Repository.
98AON04079D	Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION:** SMA PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**DOCUMENT NUMBER:** 

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative