



# MBR2020 THRU MBR20100

Reverse Voltage - 20 to 100 Volts Forward Current - 20.0 Ampere

## SCHOTTKY BARRIER RECTIFIER


### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds

### Mechanical Data

**Case** : JEDEC TO-220AC Molded plastic body  
**Terminals** : Solder plated, solderable per MIL-STD-750, Method 2026  
**Polarity** : Polarity symbol marking on body  
**Mounting Position** : Any  
**Weight** : 0.064 ounce, 1.81 grams

TO-220AC

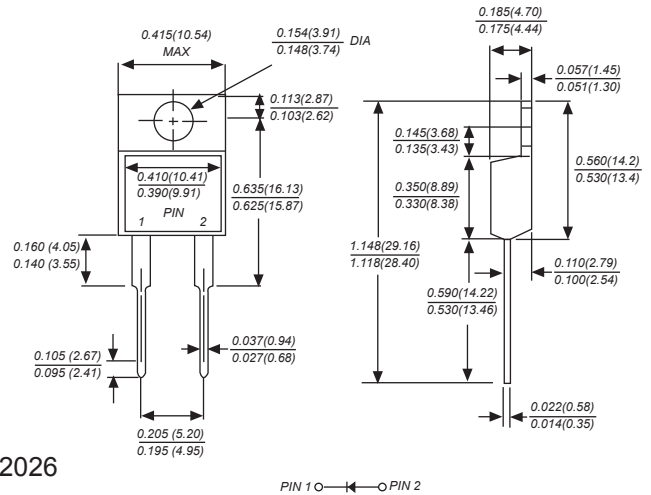

Dimensions in inches and (millimeters)

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MBR 2020	MBR 2030	MBR 2040	MBR 2045	MBR 2050	MBR 2060	MBR 2070	MBR 2080	MBR 2090	MBR 20100	UNITS
		MDD MBR 2020	MDD MBR 2030	MDD MBR 2040	MDD MBR 2045	MDD MBR 2050	MDD MBR 2060	MDD MBR 2070	MDD MBR 2080	MDD MBR 2090	MDD MBR 20100	
Maximum repetitive peak reverse voltage	$V_{RMM}$	20	30	40	45	50	60	70	80	90	100	V
Maximum RMS voltage	$V_{RMS}$	14	21	28	32	35	42	49	56	63	70	V
Maximum DC blocking voltage	$V_{DC}$	20	30	40	45	50	60	70	80	90	100	V
Maximum average forward rectified current (see fig.1)	$I_{(AV)}$	20.0										A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	150										A
Maximum instantaneous forward voltage at 20.0A	$V_F$	0.55			0.75			0.85			V	
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	$I_R$	1.0										mA
		15.0					50.0					
Typical junction capacitance (NOTE 1)	$C_J$	550					450					pF
Typical thermal resistance (NOTE 2)	$R_{\theta JC}$	2.0										°C/W
Operating junction temperature range	$T_J$	-65 to +125					-65 to +150					°C
storage temperature range	$T_{STG}$	-65 to +150										°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to case.




# MBR2020 THRU MBR20100

Reverse Voltage - 20 to 100 Volts Forward Current - 20.0 Ampere

## Ratings And Characteristic Curves

AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

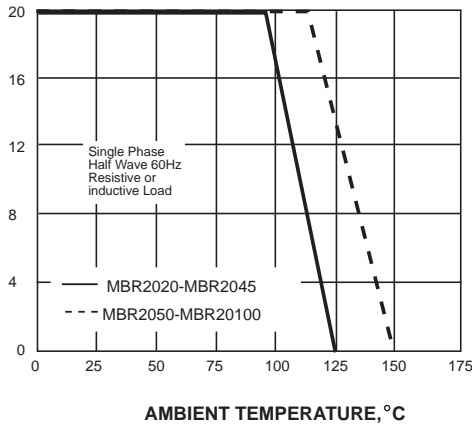

PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


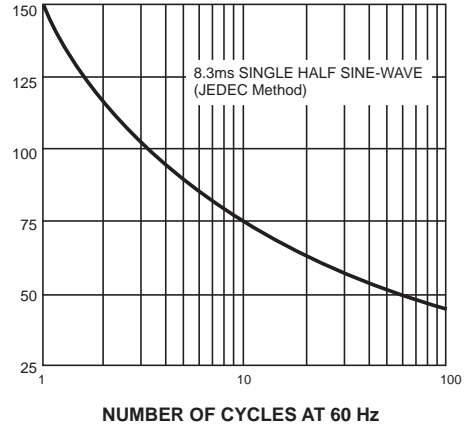


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

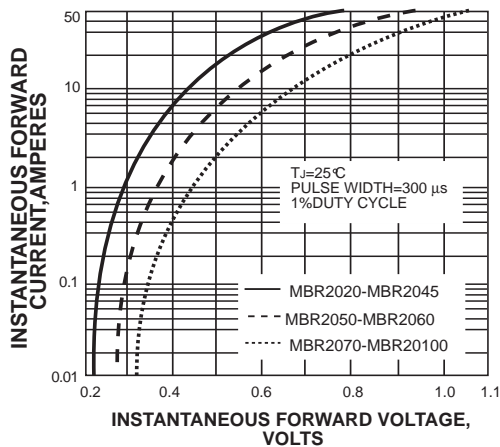

INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS



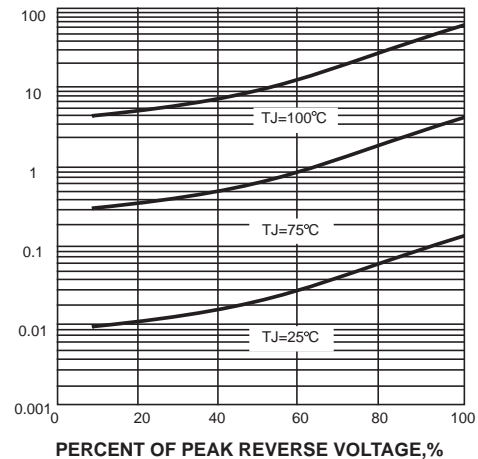


FIG. 5-TYPICAL JUNCTION CAPACITANCE

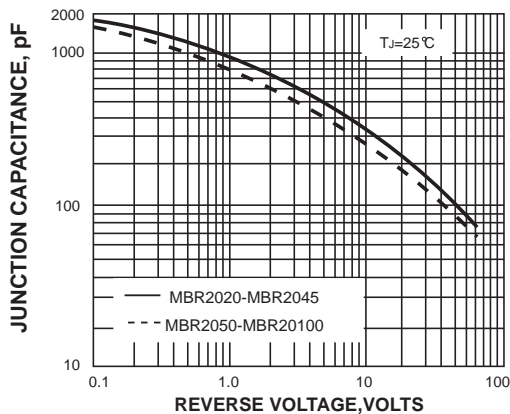

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

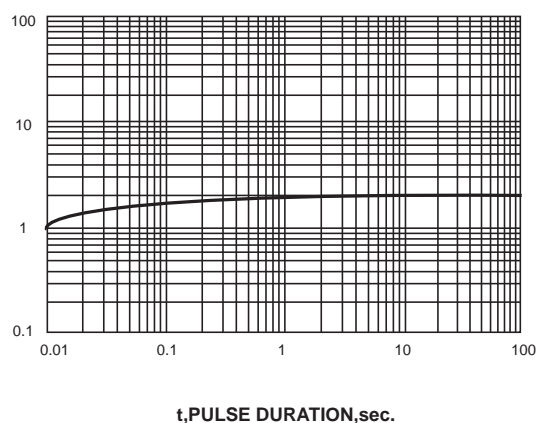

The curve above is for reference only.